




Features

- High Current Capability
- Low Forward Voltage Drop



Mechanical Data

- SOD-123 Small Outline Plastic Package
- Polarity: Color band denotes cathode end
- Mounting Position: Any

Marking: B5817W: SJ
B5818W: SK
B5819W: SL



Maximum Ratings & Thermal Characteristics (Ratings at 25°C ambient temperature unless otherwise specified.)

Parameters	Symbol	B5817W	B5818W	B5819W	Unit
Maximum repetitive peak reverse voltage	VR _{RM}	20	30	40	V
Maximum RMS voltage	VR _{RMS}	14	21	28	V
Maximum DC blocking voltage	V _{DC}	20	30	40	V
Maximum average forward rectified current	I _{FM}		1.0		A
Peak forward surge current 8.3 ms single half sine-wave	I _{FSM}		9		A
Typical Current Squared Time	I ² T		0.336		A ² S
Typical thermal resistance	R _{θJA}		250		°C/W
Power Dissipation	PD		500		mW
Storage temperature range	T _{STG} / T _J		-50-+150		°C


Electrical Characteristics (Ratings at 25°C ambient temperature unless otherwise specified.)

Parameters	Symbol	Test conditions	B5817W	B5818W	B5819W	Unit
Maximum forward voltage	V _F	IF = 0.5A IF = 1.0A IF = 3.0A	- 0.450 0.750	0.450 0.550 0.875	0.450 0.600 0.900	V
Maximum reverse breakdown voltage	V _R	IR=1mA	20	30	40	V
Maximum reverse current	I _R	VR=20V B5817W VR=30V B5818W VR=40V B5819W		1.0		mA
Type junction capacitance	C _j	VR = 4.0V, f = 1MHz		120		pF

RATING AND CHARACTERISTICS CURVES (B5817W THRU B5819W)

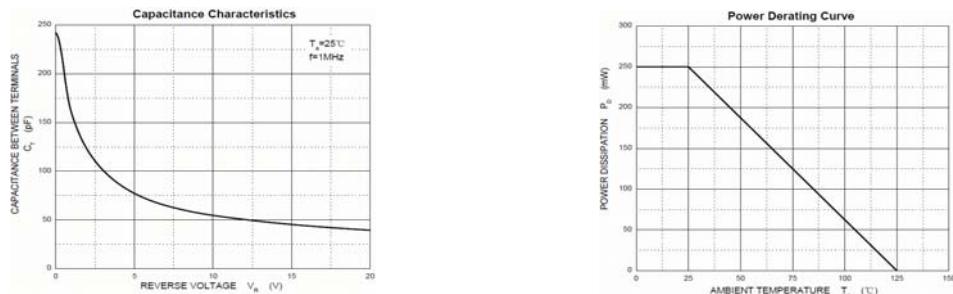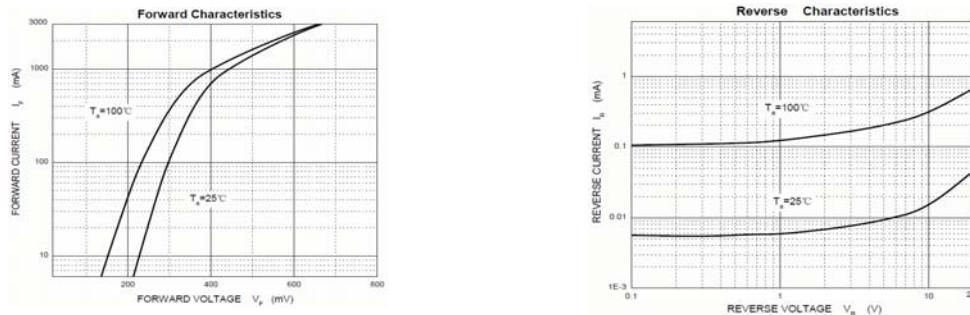


SOD-123 PA CKAGE OUTLINE Plastic surface mounted package

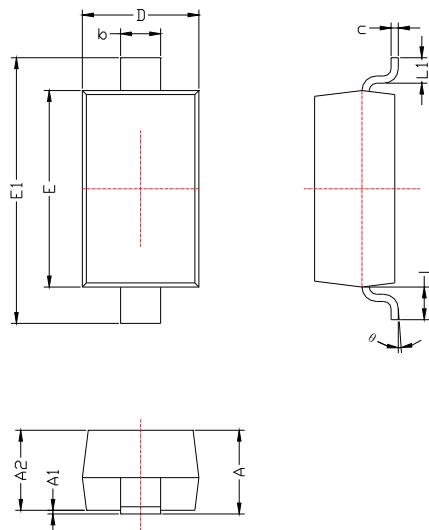

SYMBOL	DIMENSIONS	
	MIN.	MAX.
A	1.050	1.250
A ₁	0.000	0.100
A ₂	1.050	1.150
b	0.450	0.650
C	0.080	0.150
D	1.500	1.700
E	2.600	2.800
E ₁	3.550	3.850
L	0.500REF	
L ₁	0.250	0.450
θ	0°	8°

Precautions: PCB Design(Recommended land dimensions for SOD-123 diode. Electrode patterns for PCBs)

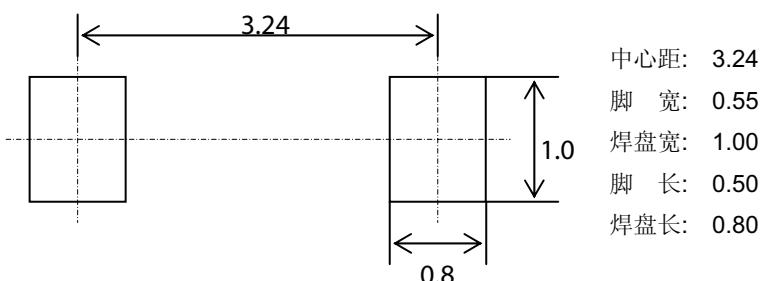

中心距: 3.24

脚 宽: 0.55

焊盘宽: 1.00

脚 长: 0.50

焊盘长: 0.80

技术要求:

1, 塑封体尺寸: 2.70 X 1.60

2: 未注公差为: ± 0.05

3, 所有单位: mm