

REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.9.14	阿树


PART NO.:

X2530 H F-XX-PT
① ② ③ ④ ⑤

- ①Series No
②Category:H-HSG
③Housing Type: F-Female Housing,
④Row No.Pin No:XX-02~20P
⑤Material:PT-PBT UL94V-0

■SPECIFICATIONS

- Voltage rating:250V AC/DC
- Current rating:3A AC/DC
- Withstanding Voltage:1000V AC/minute
- Temperature range:-40°C~+125°C
- Insulation resistance:≥1000MΩ
- Contact resistance:≤20mΩ

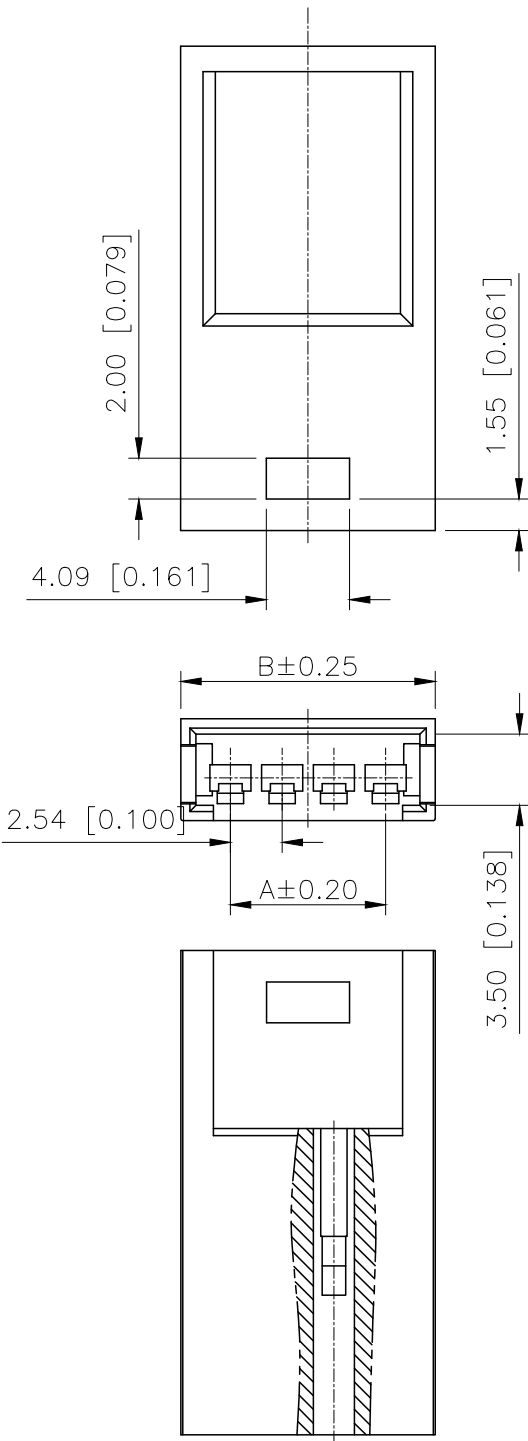

Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
02	2.54	7.42	12	27.94	32.82
03	5.08	9.96	13	30.48	35.36
04	7.62	12.50	14	32.02	37.90
05	10.16	15.04	15	35.56	40.44
06	12.70	17.58	16	38.10	42.98
07	15.24	20.12	17	40.64	45.52
08	17.48	22.66	18	43.18	48.06
09	20.32	25.20	19	45.72	50.06
10	22.86	27.74	20	48.26	43.14
11	25.40	30.28			

X2530HF-XX-PT	PBT UL94V-0	X2530TM	X2530W
X2530HF-2xXX-PT			
PART NO	Material	Suitable XKB Housing	Suitable XKB Housing

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	MODEL TYPE: 2.54mm Crimp Style Connectors
CHECKED		UNIT: mm/in	PART NO.: X2530HF-XX-PT
APPROVED		SIZE: A4	DWG NO.: