
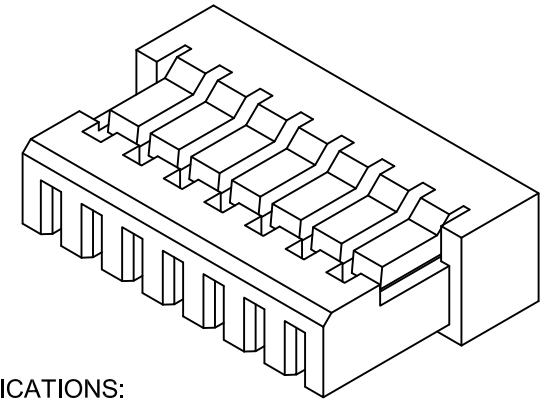
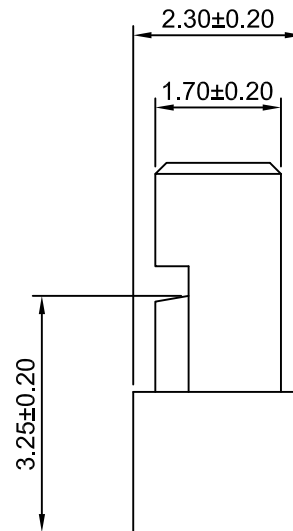
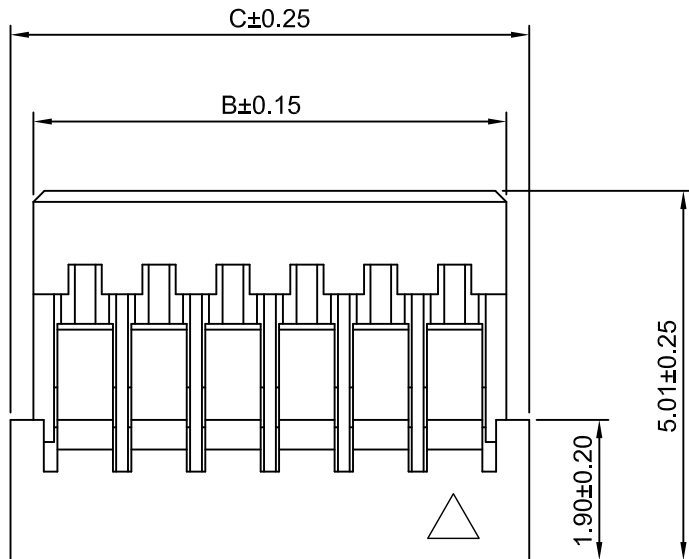


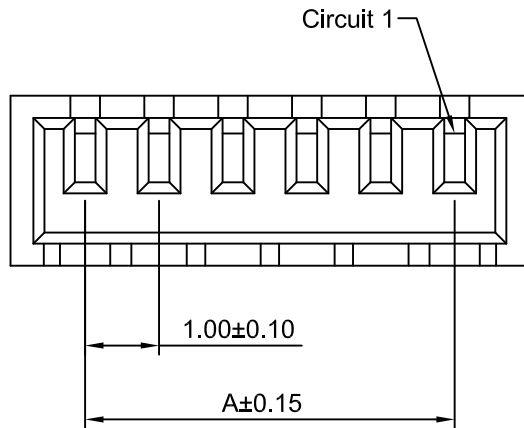

SPECIFICATIONS:

Current Rating: 1A AC,DC

Voltage Rating: 50V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 100MΩ Min.

Withstanding Voltage: 500V AC/minute

Material: Nylon66,UL94V-0(White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	1.00	2.40	3.00	12P	11.00	12.40	13.00
3P	2.00	3.40	4.00	13P	12.00	13.40	14.00
4P	3.00	4.40	5.00	14P	13.00	14.40	15.00
5P	4.00	5.40	6.00	15P	14.00	15.40	16.00
6P	5.00	6.40	7.00	16P	15.00	16.40	17.00
7P	6.00	7.40	8.00	17P	16.00	17.40	18.00
8P	7.00	8.40	9.00	18P	17.00	18.40	19.00
9P	8.00	9.40	10.00	19P	18.00	19.40	20.00
10P	9.00	10.40	11.00	20P	19.00	20.40	21.00
11P	10.00	11.40	12.00				

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		TITLE	
mm		10:1		1 of 1			
DRAWN		CHK'D		APPR			
Chengbiao Ye		Djankui Wan		Jack Yin		1.00mm PITCH HOUSING WITH PROTUSIONS	
General Tolerances		THIRD ANGLE PROJECTION					
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°				DRAWING NO.		REV A1	
				A1002HA-XP-66			