

A

B

C

D

E

F

G

12345678910

MAPX

MODIFICATION

DATE

A

B


C

D







E

F

G



SECTION A-A'

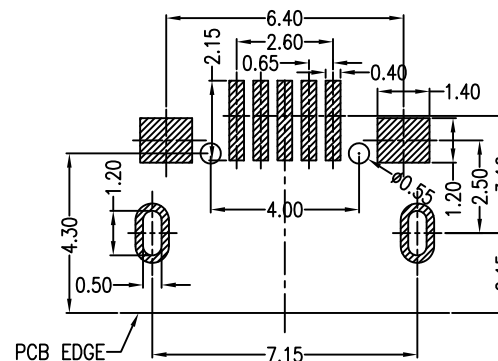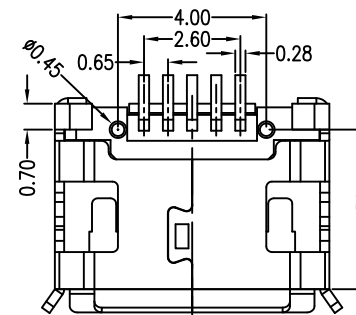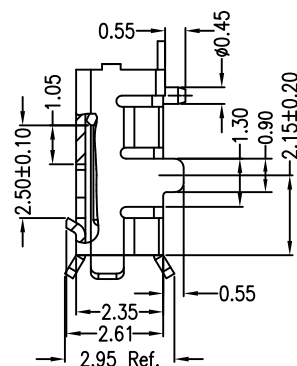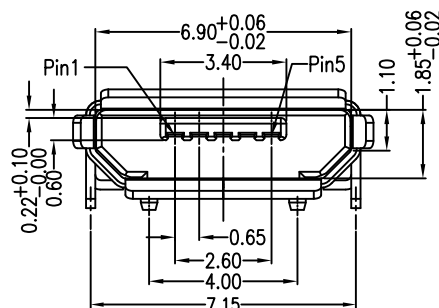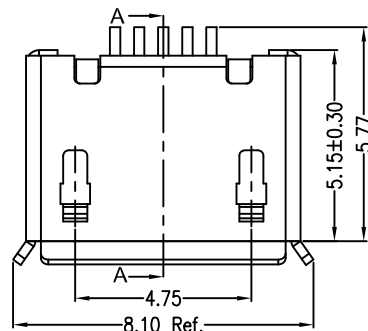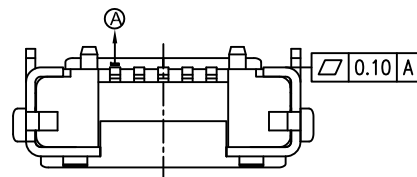

RECOMMENDED PCB LAYOUT

PCB图仅供参考

Note:

1.Material:

- 1.1 Housing: High temperature thermoplastic with g.f,UL94v-0
- 1.2 Contact: copper alloy,t=0.20mm
- 1.3 Shell: copper alloy,t=0.25mm

2.Specification:

- 2.1 Current rating:1,5PIN 1.8A Max/2,3,4PIN 1A Max.
- 2.2 Dielectric withstanding voltage: 100 V(ac) for 1 min.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 100 MΩ Min.
- 2.5 Total mating force: 3.57 Kgf Max.
- 2.6 Total unmating force: 1.0 Kgf Min.
- 2.7 Temperature range: -30°C~80°C

产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE

X.	±0.30	X.	±5.°
.X	±0.25	.X	±2.°
.XX	±0.15	.XX	±1.°
.XXX	±0.10	.XXX	±0.5°

深圳市精拓金电子有限公司

单位
UNITS

MM

制图
DRAWING

尹先华

制图料号
PRODUCT PART NO.

920-E52A2021S10102

比例
SCALE

1:1

审核
CHKD

郭治富

产品名称
PRODUCT NO.

MICRO 5P-F B型两脚DIP7.2有边有柱加焊脚加长0.75SMT

日期
DATE

2021-04-16

核准
APPD

黄国荣

角法
VIEW版本
VER

AO

12345678910