

# Actuator

17-  
411231Z

Distribution by  
DigiKey

**DigiKey**



<https://digikey.eao.com/p/17-411231Z>

Your product:

---



## 17-411231Z Actuator

### FRONT

Reflector:	Plastic, Black
Front form:	round
Front dimension:	Ø 18,3 mm

### MOUNTING

Design:	raised
Mounting cut-out:	Ø 16.2 mm

### OPERATING-/INDICATION PART

Illumination colour:	Green
Lens cap shape:	flush

### ELECTRICAL CHARACTERISTICS

Operation current:	3 mA ±15 %
Operating voltage:	230 V AC ±10 %
Lumi. Intensity:	120 mcd
Polarity:	Anode (+) Brass plug-in connector Cathode (-) Brass tinned plug-in connector

### MECHANICAL CHARATERISTIC

**Weight:** 0.008 kg

**Tightening torque:** Fixing nut max. 0.2 Nm

**Terminal:** Plug-in terminal, 2.8 x 0.8 mm

## AMBIENT CONDITION

**Operating temperature:** - 20 °C ... + 60 °C

**IP Protection:** IP40 front side, IP65 front side, according to IEC 60529

**Storage temperature:** - 25 °C ... + 80 °C

## CERTIFICATE

**Conformities:** 2011 / 65 / EC (RoHS), 2014 / 35 / EU (230 VAC)

**Approbations:** UL


## OTHER

**Hints:** Connectors: Brass terminal = anode (+); brass tinned terminal = cathode (-), IP67 front side gap between LED and reflector and gap between reflector and frontplate sealed to IP67 when using the supplied gasket., The plastic is limited resistant to chemicals.

**Kind of illumination:** Single-LED


**Short Description:** Actuator, Ø 16.2 mm, Ø 18,3 mm, round, Plug-in terminal, 2.8 x 0.8 mm, Green

**Dimension drawings:**

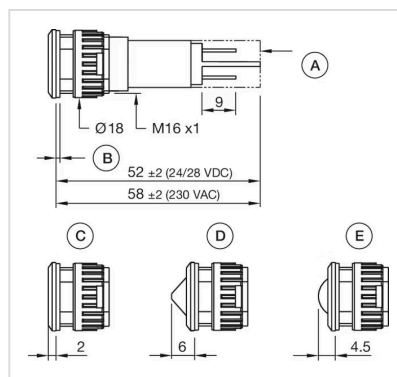

A = Protection tube (only 230 VAC)  
B = 1 gasket  
C = flat  
conical  
D = round

**Wiring diagrams:**

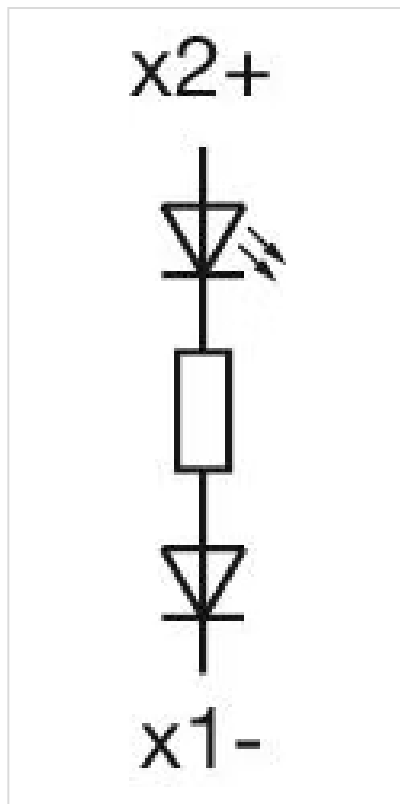

**Mounting cut-outs:**

