

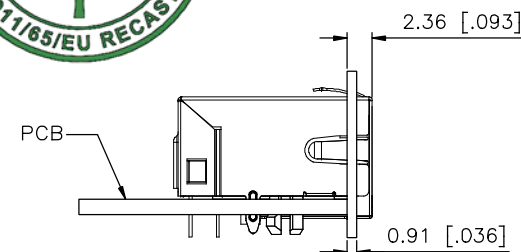
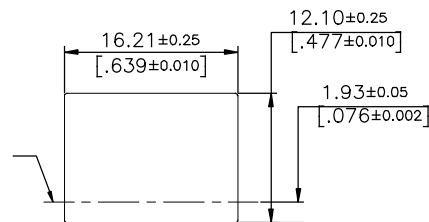
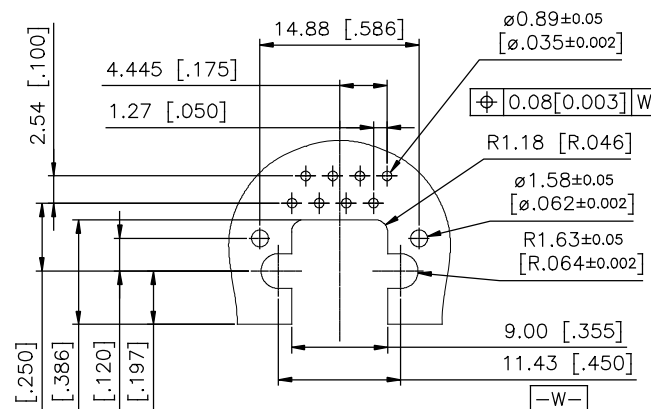


TOP OF PCB

RECOMMENDED PANEL CUTOUT

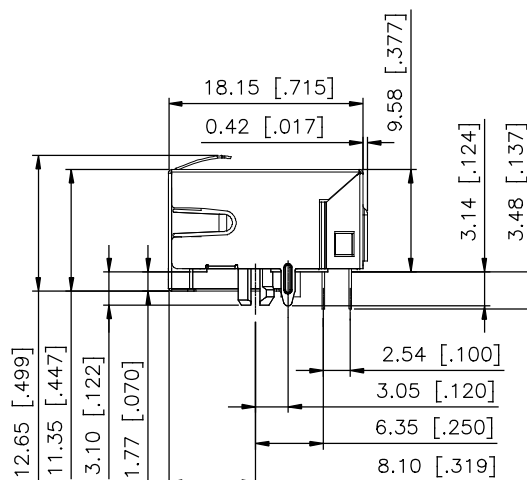

SIDE VIEW SHOWING JACK
RELATION TO PANEL



RECCMMENDED P.C.B. LAYOUT
TOLERANCE: $\pm 0.05\text{MM}$ [0.002 INCH]

AMPHENOL PART NUMBER: RJULE-4X181-01

CONTACT PLATING CODE
0 = GOLD FLASH
1 = 15u"
2 = 30u"
3 = 50u"

NOTES:

MATERIALS:

HOUSING: HIGH TEMPERATURE THERMOPLASTIC.
FLAMMABILITY RATING UL 94V-0
COLOUR: BLACK

CONTACTS: PHOSPHOR BRONZE

PLATING: GOLD PLATING ON MATING SURFACES.
SEE PART NUMBER SYSTEM OPTION
50 u" [1.27 MICRONS] MIN. NICKEL UNDERPLATE.
100 u" [2.54 MICRONS] MIN. MATTE TIN ON
SOLDER AREA.

SHELL: BRASS

PLATING NICKEL

UNLESS SPECIFIED OTHERWISE	DRAWN MT.Chen	DATE JUN 30/08
PRIMARY UNITS MILLIMETER	CHECKED LAWRENCE C	JUN 30/08
SECONDARY INCH	M.E. APP'D	
REFERENCE IN PARENTHESES	Q.A. APP'D	
GENERAL TOLERANCES	DWG APPR.	
1 DECIMAL PLACE ± 0.38	ENG. REL. NO.	
2 DECIMAL PLACES ± 0.25	REF.	
3 DECIMAL PLACES ± 0.25	THIRD ANGLE PROJECTION	DO NOT SCALE DRAWING
ANGULAR DEGREES $\pm 1.0^\circ$		

Amphenol Canada Corp.	
www.amphenolcanada.com	
TITLE RJ ULTRA LOW PROFILE MODULAR JACK 8 POSITION, 8 CONTACTS, WITH SHIELD. -RoHS COMPLIANT	
DWG. NO. P-RJULE-4X181-01	REV B
CODE ID NO. 03554	DWG SIZE: C SCALE: N/A SHEET 1 OF 1