


P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	INITIAL RELEASE	27MAY2021	MM	-
	C	REVISED PER ECR-23-170092	27AUG2021	MM	-

1 Mit Schraubensicherung
Loctite 243 gesichert
Locked with threadlocker
Loctite 243

2 Bei Erstmontage
vollstaendig einschrauben
Insert complete for
initial assembly

3 Oeffnungsspiel Klemmhebel
zu eingelegtem Kontakt =0.1mm
Opening clearance clamping lever
to loaded contact =0.1mm


4 !!! Achtung:
Vor Einsatz im Umbausatz
Maße kontrollieren und ggf.
einstellen
!!! Attention:
Check measurement before
using on conversion kit.
Too long adjusted fingers
may damage the finger
and conversion kit

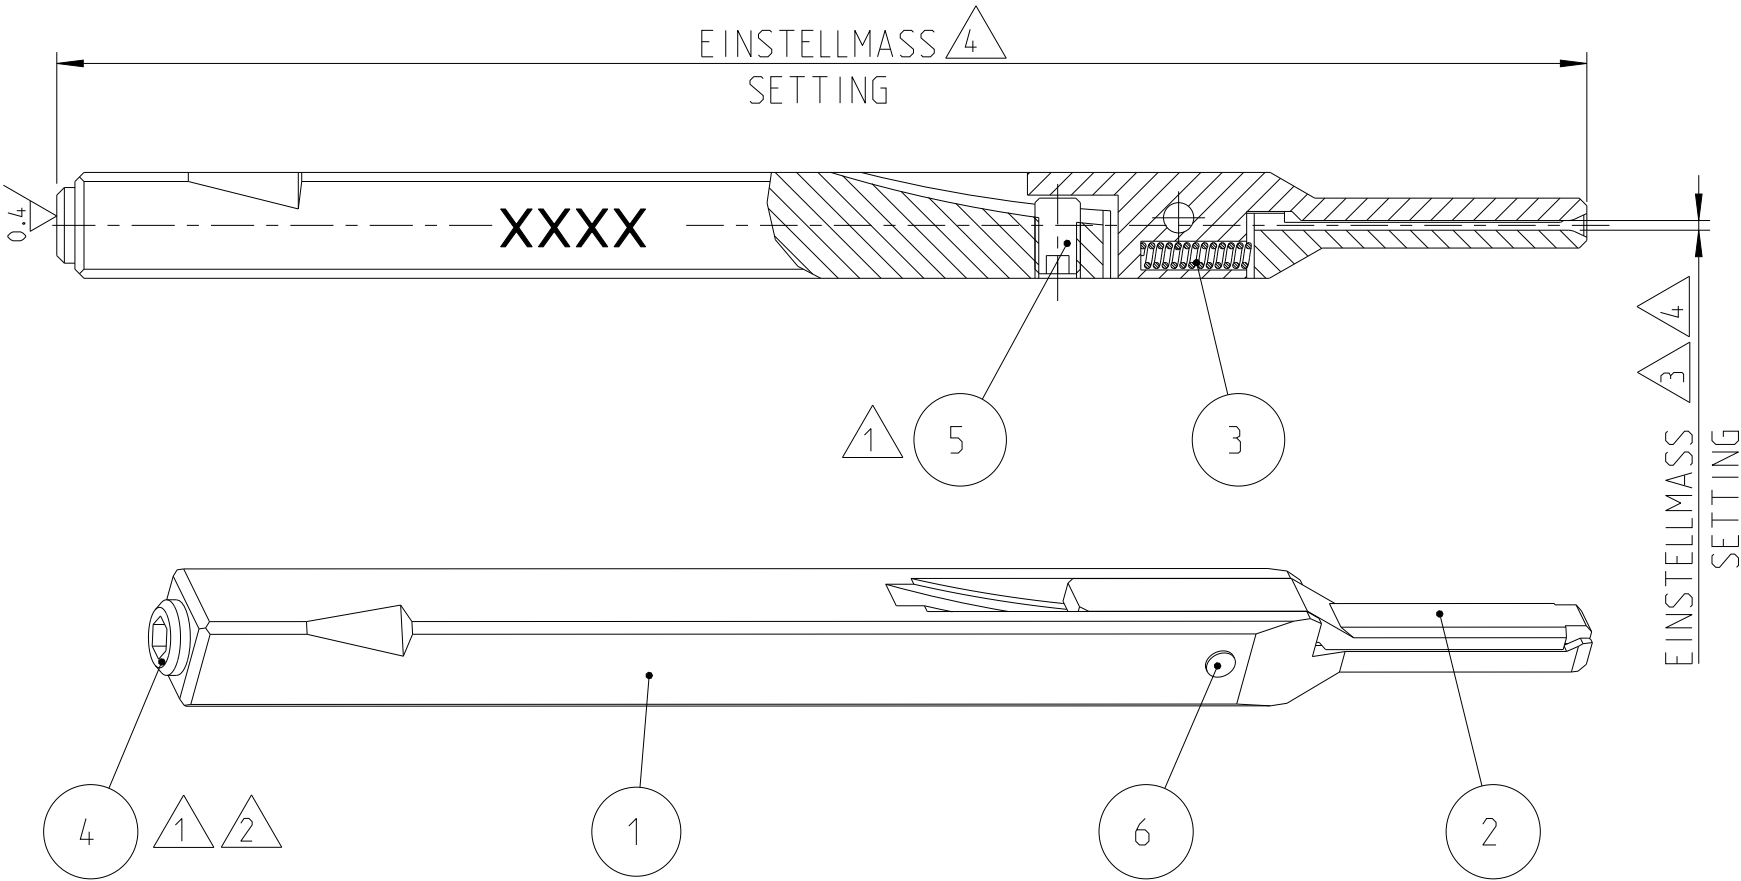

POS	QTY	TE/PN	PART REV	DESCRIPTION	WEAR	SPARE
1	1	1-1372731-9	D	SETZFINGER INSERTION FINGER	-	-
2	1	1-1372732-2	C	KLEMMHEBEL CLAMPING LEVER	-	-
3	1	8-547505-4	A1	Druckfeder -	-	YES
4	1	3-519011-7	B	SCREW M5x8 DIN 913 -	-	YES
5	1	2-519011-0	B	SCREW M3x5 DIN 913 -	-	YES
6	1	519051-7	A	Zyl.-Stift 2m6x8 DIN 6325 -	-	YES

XXXX marked by drawing
number, revision, date (mm/yy) &
supplier symbol

XXXX Mit Zeichnungsnummer,
Revision, Herstelldatum (mm/yy) &
Herstellerkürzel gekennzeichnet

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 24APR2013 RIKON Riedel	 TE Connectivity		
DIMENSIONS: mm		CHK -			
		APVD -	NAME SETZFINGER KOMPLETT INSERTION FINGER COMPLETE		
		PRODUCT SPEC -			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC -	SIZE CAGE CODE DRAWING NO RESTRICTED TO		
0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±		WEIGHT -			
MATERIAL		FINISH	A3 00779 ©1-1372730-8		
			CUSTOMER DRAWING		
			SCALE 2:1 SHEET 1 OF 1 REV C		