

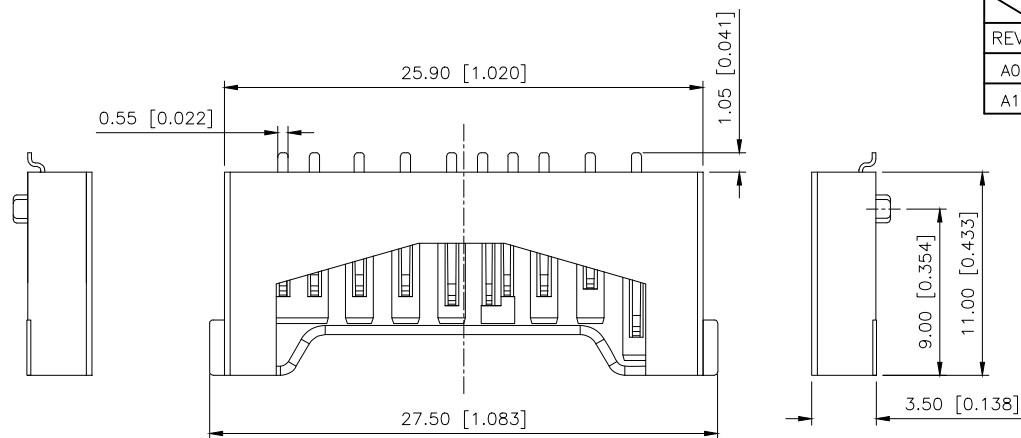
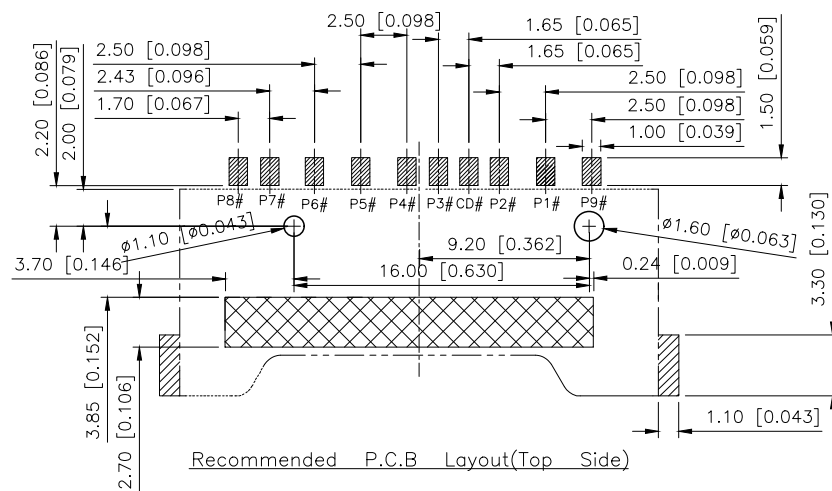
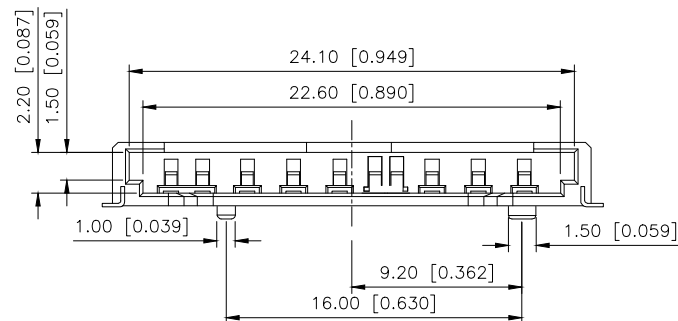




	REVISIONS				
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.05.09	阿树

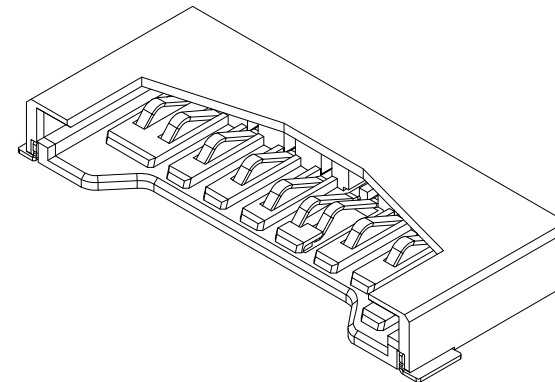

PIN#	NAME	DESCRIPTION
1	DAT3	DATA LINE BIT3
2	CMD	COMMAND/RESPONSE
3	VSS1	SUPPLY VOLTAGE GROUND
4	VDD1	SUPPLY VOLTAGE
5	CLK	CLOCK
6	VSS2	SUPPLY VOLTAGE GROUND
7	DAT0	DATA LINE BIT0
8	DAT1	DATA LINE BIT1
9	DAT2	DATA LINE BIT2
10	CD	CARD DETECT
11	WP	WRITE PROTECT

 Pad Area

 Keep Out Area

Notes:

- 1.All Dimensions are in millimeters
- 2.Operation voltage: 100 VAC max.
- 3.current rating: 1 Amps max.
- 4.Contact resistance: 100m ohms max
- 5.Insulation resistance: 1000M ohms min. 500 VDC
- 6.Dielectric withstanding voltage: 500 VAC / 1minute
- 7.Operating Temperature: -20 to +60
- 8.Storage Temperature:-40 to +70
- 9.Material:

HOUSING: HI-TEMP.PLASTIC ;BLACK ; UL 94V-0
CONTACT: COPPER ALLOY(Y=0.20mm)

Recommended P.C.B Layout(Top Side)

Tolerance: ± 0.05

AuGLAR	$\pm 5^\circ$
X.	± 0.40
X.x	± 0.30
X.xx	± 0.20
X.xxx	± 0.15
UNSPECIFIED	TOLERAuCES



DESIGN	阿树	VIEW: 	MODEL TYPE: SD CARD CONN		
CHECKED		UNIT: mm/in	PART NO.: XKSD-013		
APPROVED		SIZE: A4	DWG NO.:		
PRECISION CO., LIMITED			SCALE N/A	PAGE 1/1	REVISION A1