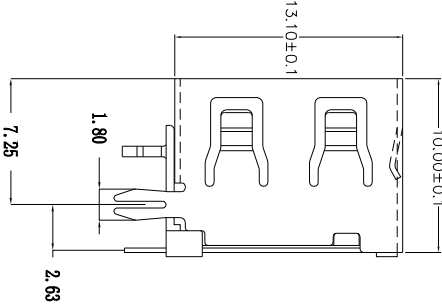



规格说明:Specifications:
电气特性:Electrical:

1. 额定电流: Current Rating 1.5A/contact terminal
2. 额定电压: Voltage Rating 30V DC
3. 接触阻抗: Contact Resistance 30 milliohms MAX
4. 耐电压: Dielectric Withstanding Voltage: 500 V AC AT Sea Level
5. 绝缘阻抗: Insulation Resistance: 1000MEGA ohms MIN

物理性能:Mechanical:

1. 插拔力: Connector Mate and Umate Force Mate force:3.57kgf(MAX) Umate force:1.02kgf(MIN)
2. 端子保持力: Terminal Retention 1.2kgf(MIN)

原材料:Matorial:

1. 塑胶:Housing: Hing Temperature Ternmaplastics, UI 94V-0 PBT White/Black
2. 端子:Contact:Copper Alloy C2680
3. 外壳:Shell: Copper Alloy C2680/SPCC

电镀:Finish:

1. 端子:Contact: Plated Gold in Mating Area; Tin On Solder Tails
2. 外壳:Shell: Nickel Plating

 深圳市万骏达电子有限公司 http://www.warjunda.com		图号 (DWG NO)	单位 (UNIT): MM
品名 (ITEM NO)	AF10.0侧插短体平口	版本 (REV)	比例 (SCALE) 1:1
料号 (PART NO)	USB2.0-AF-CC-ZB-10.0	日期 (DATE)	未注公差
型号 (MODEL NO)		设计 (DESIGN)	TOLERANCE UNSPECIFIED
		审核 (CHECKED)	X.X ±0.30
		核准 (APPROVED)	X.XXX ±0.20
			X° ±5°
			X.X° ±2°