




PRODUCT NUMBER
SEE TABLE

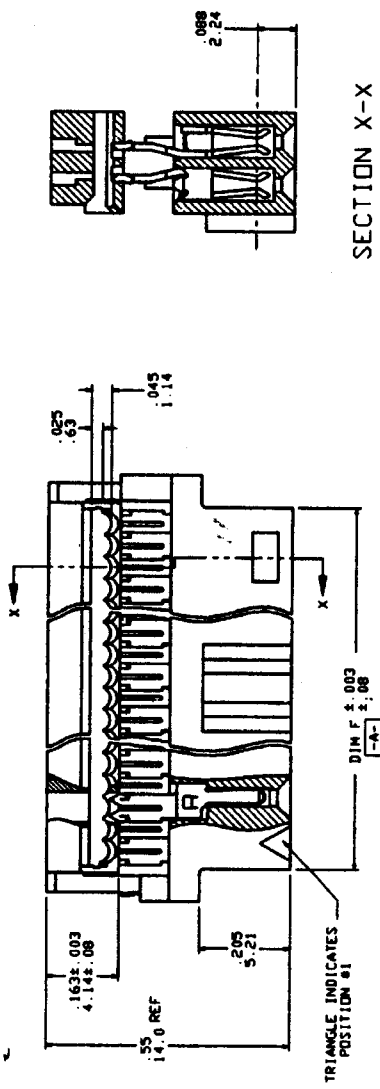

SECTION X-X



THIS CONFIGURATION FOR
ODD POSITIONS PER ROW 2X3
DETAIL Y

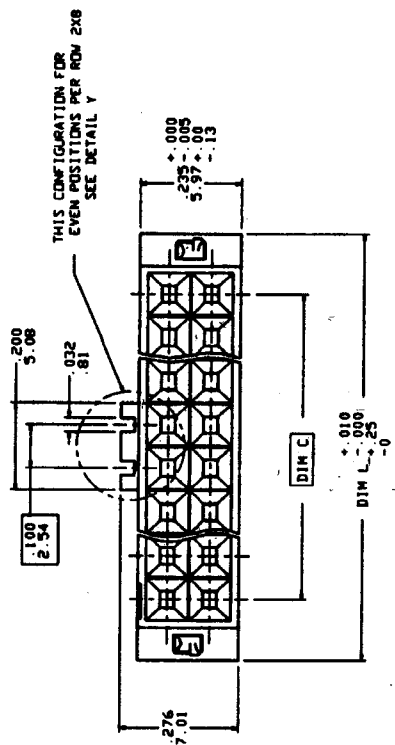

REV		ECN/ORD#	BY	DATE	SHEET INDEX		ISSUE	J	H
F	1		RLS	7/28/07	SH	NO.	1	2	
G	1		RLS	7/28/07	CUSTOMER				
H	1		RLS	7/28/07	QUICKIE BACKPLANE				
M	1		RLS	7/28/07	PRE-LOAD-ASSEMBLY				
J	1		RLS	7/28/07	SHEET				
					8:1 D 66245 1 of 2				



www.fciconnect.com

QUICKIE BACKPLANE
PRE-LOAD-ASSEMBLY

8:1 D 66245 1 of 2

DATE: 7/28/07

PRODUCT NUMBER	SIZE	DIM 'C'	DIM 'F'	DIM 'L'	DASH NO	COVER ORIENTATION	BASE STYLE
66245-X10	2X5	.400/.10.16	.530/.13.46	.680/.17.27	-0XX	RIGHT	PLAIN
-X14	2X7	.600/.15.24	.730/.18.34	.880/.22.35	-1XX	LEFT	PLAIN
-X16	2X8	.700/.17.28	.830/.21.08	.980/.24.89	-2XX	RIGHT	POLARIZED
-X20	2X10	.900/.22.86	1.030/.26.16	1.180/.29.97	-3XX	LEFT	POLARIZED
-X24	2X12	1.180/.27.94	1.230/.31.24	1.380/.35.10			
-X26	2X13	1.280/.30.48	1.330/.33.78	1.480/.37.59			
-X30	2X15	1.480/.35.56	1.530/.38.86	1.680/.42.70			
-X34	2X17	1.680/.40.64	1.730/.43.94	1.880/.47.75			
-X36	2X18	1.780/.43.18	1.830/.46.48	1.980/.50.30			
-X40	2X20	1.980/.48.26	2.030/.51.56	2.180/.55.37			
-X44	2X22	2.180/.53.34	2.230/.56.54	2.380/.60.50			
-X50	2X25	2.480/.68.96	2.530/.74.26	2.680/.68.07			
-X56	2X28	2.780/.78.58	2.830/.81.88	2.980/.78.78			
-X60	2X30	2.980/.73.66	3.030/.76.96	3.180/.80.77			
66245-X64		UNASSIGNED					

COVER ORIENTATION

RIGHT ASSY

LEFT ASSY

NOTES:

1. TERMINAL MATERIAL: FULL HARD PHOS. BRONZE ALLOY, UNS-CS1000.
2. TERMINAL PLATING: 50u"/1.27u MIN NI UNDERPLATE OVER ENTIRE TERMINAL AND 30u"/.76u MIN AU IN CONTACT AREA WITH AU FLASH ON REMAINDER OF TERMINAL.
3. HOLDING MATERIAL: BASE & COVER- GLASS FILLED POLYESTER, FLAME RETARDANT PER UL94V-0, COLOR- BLUE.
4. CONNECTOR ASSYS PACKAGED INDIVIDUALLY, 10 PER CARD, THEN BOXED IN LOTS OF 100.
5. ADD "LF" SUFFIX AT THE END OF PART NUMBER FOR LEAD FREE OPTION.
6. IF "LF" P/N THE PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008.
7. THE HOUSING WILL WITHSTAND EXPOSURE TO 260° PEAK TEMPERATURE FOR 15 SECONDS IN A WAVE SOLDER PROCESS

REV		ECN/DOCN		BY	DATE	SHEET INDEX	ISSUE	SH NO.	1	CUSTOMER
1						1	1	1		1
QUICKIE BACKPLANE PRE-LOAD ASSEMBLY DATE: 7/28/87 BY: M. HAN CHK: M. HAN APP: M. HAN DES: M. HAN REV: 8:1 D 66245 2 of 2										