

Type BLC-16

Fuse Block

For ¼" x 1¼" (6.3 x 32mm) Fuses



www.optifuse.com

(619)-593-5050

Fuse Style: ¼" x 1¼" (6.3 x 32mm) Fuses

Material:

Body: Thermostate (UL Flame: 94V-0)

Fuse Clips: Copper Alloy Tinned T:0.5mm

Terminal: Copper Alloy Tinned T:0.8mm

Specifications:

Dielectric Strength for 60 seconds: 1200VAC Min

Suitable Rated Current: 25A 250V

Insulation resistance at 500V DC: 500M Min.

Temperature Rise: 30 with dummy fuse, 85 with time-delay fuse



Voltage Drop: 15mV Max.

Agency Standards and Listings:




Product Dimensions: Inches [mm]


Part #	# of Pins/Legs	Terminals
BLC-16-B	no	Bent
BLC-16-B1	1	Bent
BLC-16-B2	2	Bent
BLC-16-S	no	Straight
BLC-16-S1	1	Straight
BLC-16-S2	2	Straight

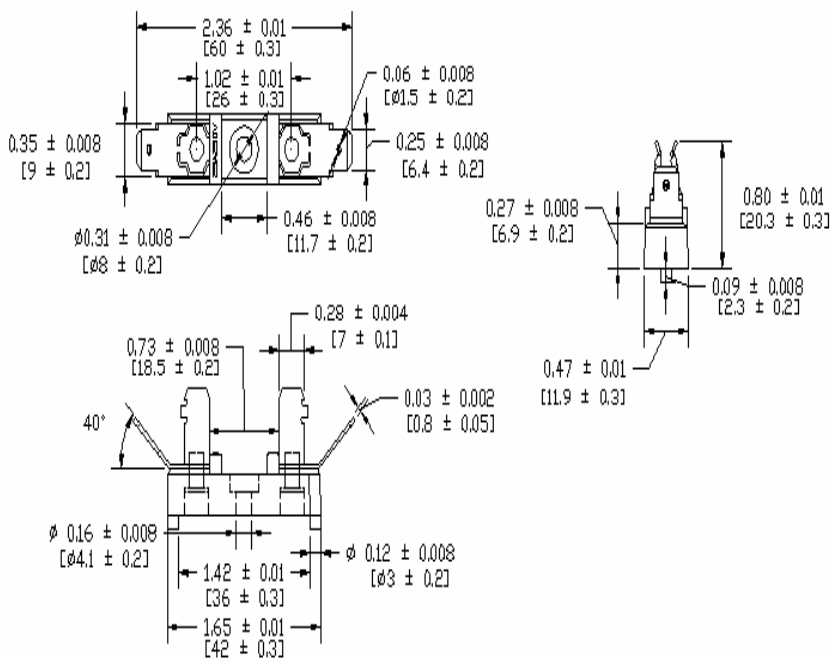


BLC-16-B




BLC-16-B1



BLC-16-B2



0.77 ± 0.01
[19.5 ± 0.2]



Note: All specifications subject to change without notice.

Rev A 06/2007 - Page: 1/2
Code: C01-02D

Type BLC-16





Fuse Block

For 1/4" x 1 1/4" (6.3 x 32mm) Fuses




www.optifuse.com


(619)-593-5050

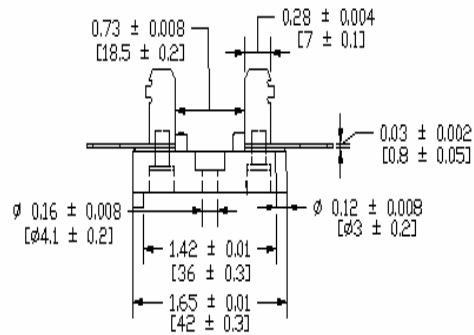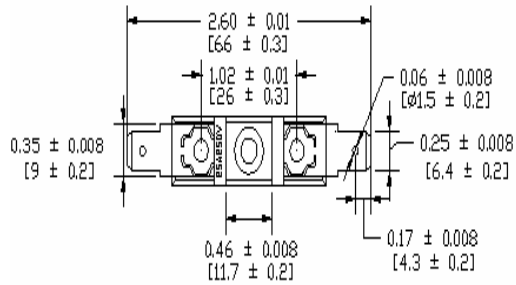



BLC-16-S



BLC-16-S1



BLC-16-S2



Warning:



-Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.

-Avoid contact of Fuse Block with chemical solvent. Prolonged contact will damage the device performance.

Note: All specifications subject to change without notice.

Rev A 06/2007 - Page: 2/2
Code: C01-02D