



Type C pin	Signal Name
1	TMDS Data2 Shield
2	TMDS Data2+
3	TMDS Data2-
4	TMDS Data1 Shield
5	TMDS Data1+
6	TMDS Data1-
7	TMDS Data0 Shield
8	TMDS Data0+
9	TMDS Data0-
10	TMDS Clock Shield
11	TMDS Clock+
12	TMDS Clock-
13	DDC/CEC Ground
14	CEC
15	SCL
16	SDA
17	Utility
18	+5V Power
19	Hot Plug Detect



SEC	A-A
SCALE	1:1

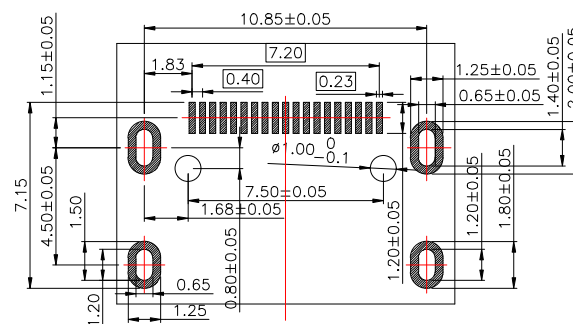

RECOMMENDED P.C.B HOLE LAYOUT
COMPONENT SIDE VIEW(TOLERANCE: ± 0.05)

- 1.MATING FORCE:44.1N MAX
- 2.UNMATING FORCE:7-25N
- 3.DURABILITY: 5000 CYCLES MIN
- 4.CURRENT:0.5A
- 5.VOLTAGE:40V MAX
- 6.WITHSTANDING VOLTAGE:500V AC MIN.(UNMATED)
- 7.CONTACT RESISTANCE:30MN MAX.
- 8.INSULATION RESISTANCE:100MN MIN.(UNMATED)
- 9.OPERATING TEMPERATURE RANGE:-20.C TO +85.C
- 10.ALL THE MATERIAL SHOULD COMPLY WITH THE ROHS REQUIREMENT.

MANUFACTURE DWG



东莞市讯普电子科技有限公司
DongGuan XunPu Electronics Co.,Ltd

UNLESS OTHERWISE
SPECIFIED TO FRANCES




MINI HDMI(C TYPE) F


SCALE1:1	UNIT:MM
----------	---------

X.X:±1°

REV:A

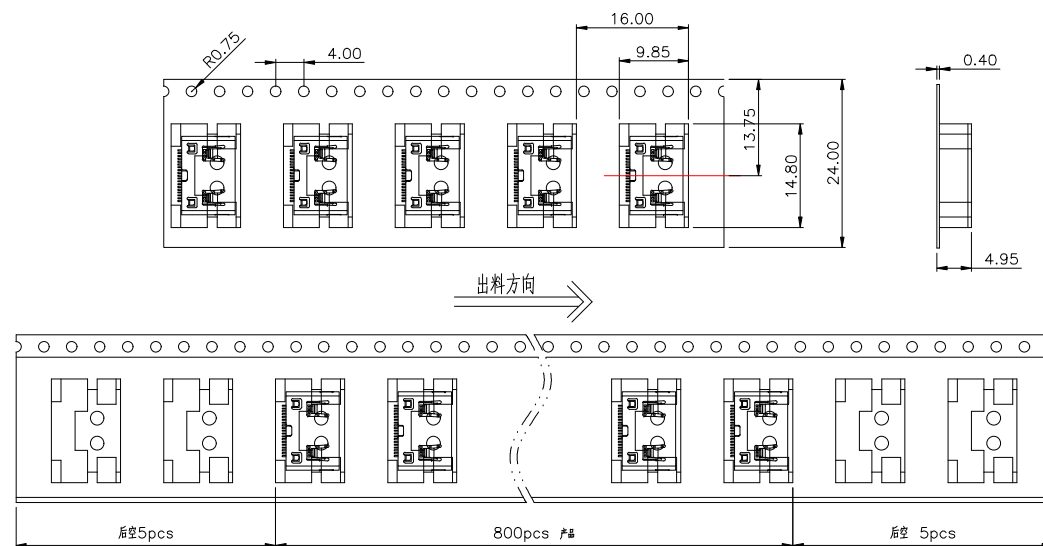


NO.1

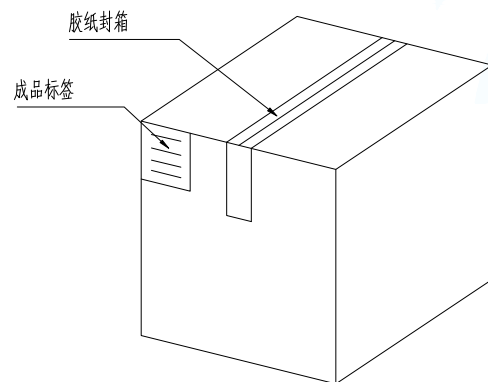


纸箱规格: 330*330*385


NO.4

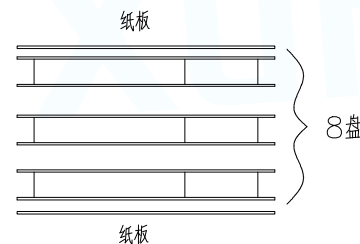

8盘

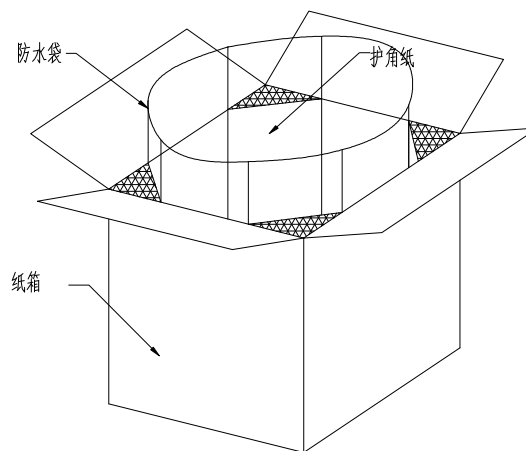

NO.3

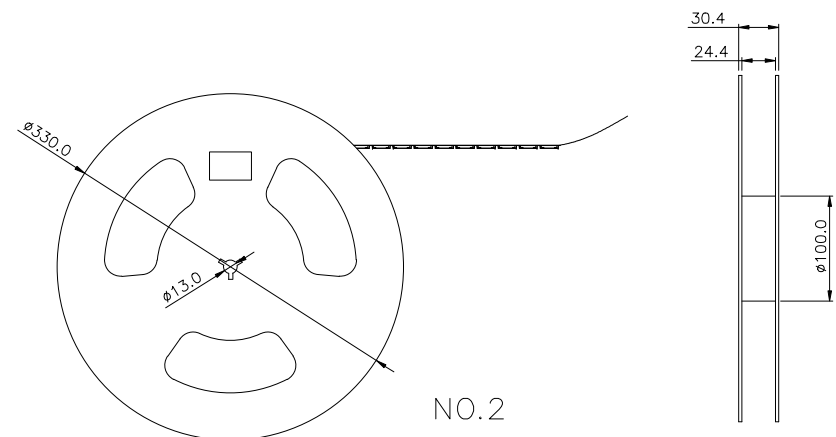

NO.2

1. 材质要求:

- 1.1 纸箱的材质要求为K=K;外形尺寸为39*39*38.5CM;
- 1.2 卷盘的材质为PS;卷盘的外形尺寸为 $\phi 330 \times 30.4$;
- 1.3 卷带的材质为PS;卷带的外形尺寸为12960*24*4.0mm

2. 包装要求:

- 2.1 将卷带放入包装机后, 前空5PCS, 后放产品800PCS, 再后空5PCS;上带留200MM长度。
- 2.2 将包装好的产品从包装机上取下并包装好;
- 2.3 把累叠好的12盘(共计9.6Kset), 用防水袋包装内附干燥剂, 上下放纸板放入纸箱内, 整箱毛重为4.5KG;
- 2.4 把包装好的成品打包封箱, 并在纸箱外贴上标签

备注:

1. 若有未装满之零数, 必须用泡棉塞满。
2. 针对于包装方式可根据客户要求包装。

MANUFACTURE DWG			 东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd		
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE: MINI HDMI(C TYPE) F		
DECIMALS:	ANGLES:		PAR	HDMI-201	
X.X:±0.35	X'.:±2°		DWN		
X.XX:±0.25	X.X:±1°		CHKD		
X.XXX:±0.15			APVD		
CUSTOMER COPY		SCALE1:1	UNIT:MM		
		SIZE:A4	SHEET:1F1	REV:A	