

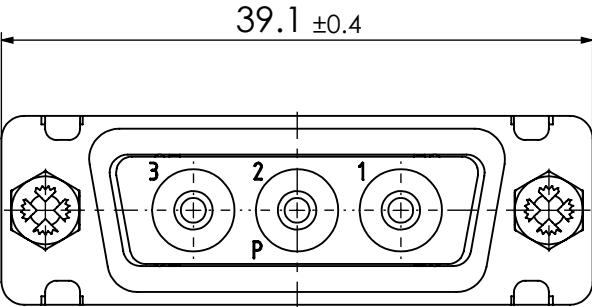
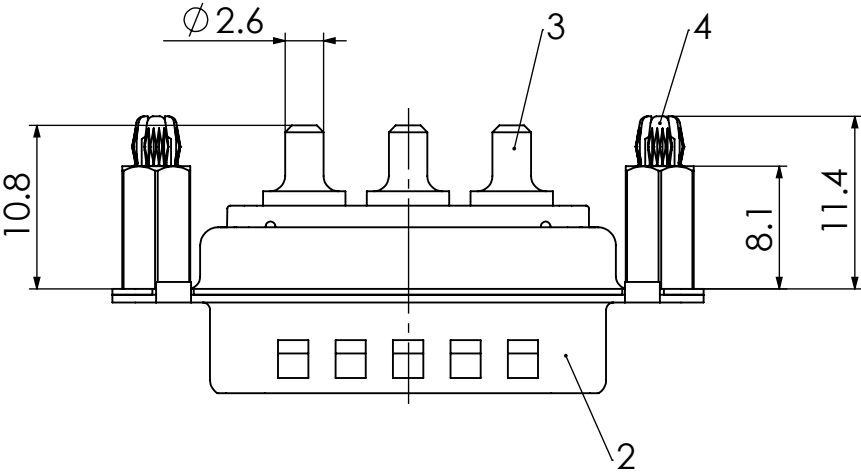
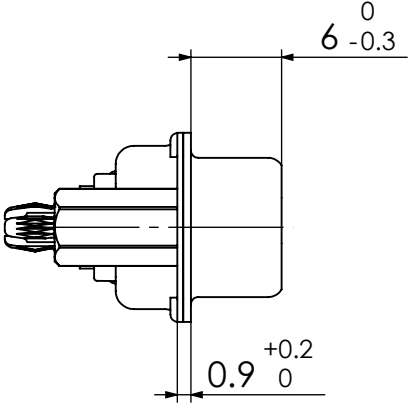


RoHS compliant by exemption

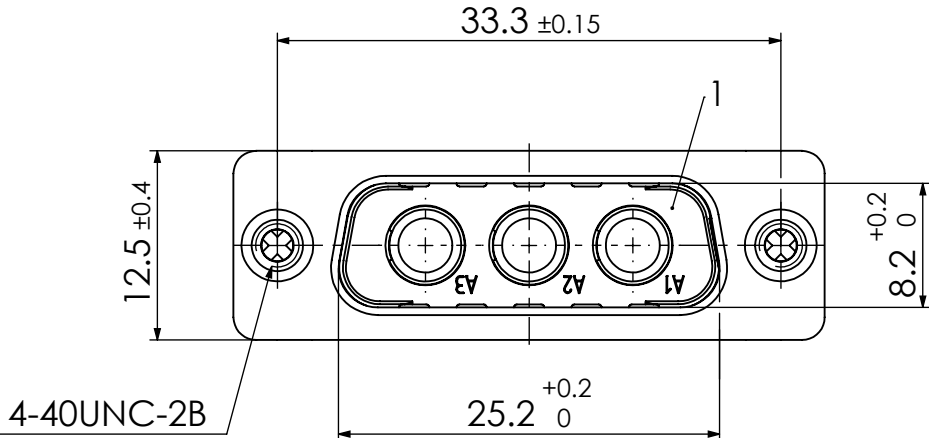

PCB hole pattern, mounting side

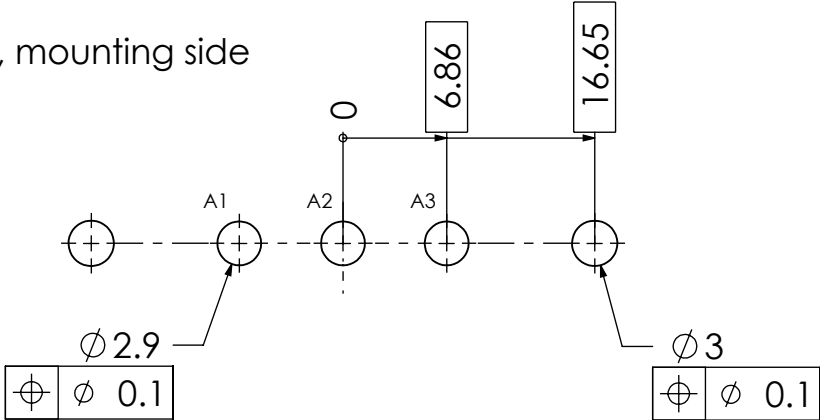

4	2	Snap-in bolt	PCB 1.6mm / Brass	tin plated
3	3	High power contact	FMP014P104	20A
2	1	Shell	Steel	tin plated
1	1	Insulator	PBT (-55°C to +130°C) acc. UL94V-0	green
No.	St.	Part	Type Description/Material	Surface plating/Colour/Class

FUNCTIONAL SYMBOLS ▽ = 0 ▽ = 0 ▽ = 0	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION															
	DIMENSION UNITS mm		SCALE 2:1		MEASUREMENTS WITHOUT TOLERANCE ACC. TO ISO 2768-m				molex FCT D-Sub Mixed-Layout Connector							
					CURRENT REVISION DRWN: DRAWN BY mteubel 19-12-2023 APPR: APPR BY msteinbrueck 21-12-2023											
	2		24410		INITIAL REVISION DRWN: DRAWN BY MTeubel 31-01-2017 APPR: APPR BY ssshref 02-02-2017				PRODUCT CUSTOMER DRAWING MATERIAL NUMBER 1731071029						REVISION 2	
	1															
	REV.	CH.-NO.														
	REPLACEMENT FOR: 1731071029_Rev.A1				FIRST ANGLE PROJECTION 		DRAWING A3-SIZE		DOCUMENT NUMBER FM3W3P-4668				CUSTOMER GENERAL MARKET		SHEET NUMBER 1 OF 1	

COMMENT: