

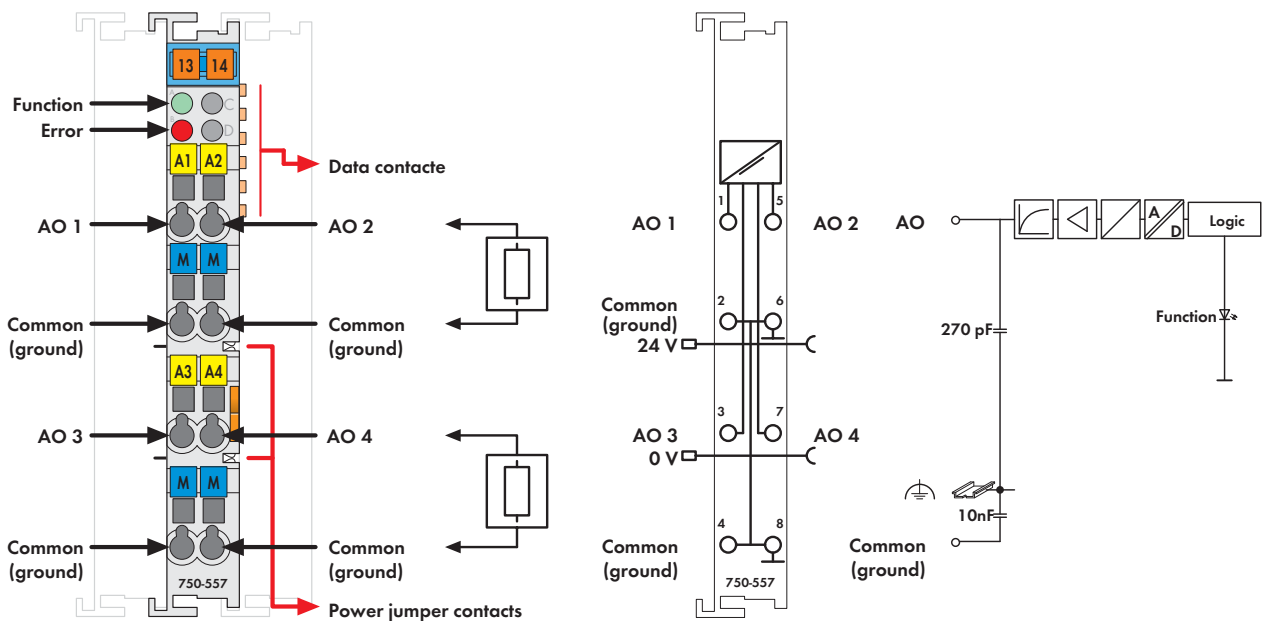


Fig. 750 Series
Delivered without miniature WSB markers

The analog output module creates a standardized signal of $\pm 10\text{V}$ or $0\text{--}10\text{V}$.

The output signal is electrically isolated and will be transmitted with a resolution of 12 bits.

The system voltage supply is used for the power supply of the module.

The output channels of the module have one common potential.

Description	Item No.	Pack. Unit
4AO ± 10V DC	750-557	1
4AO 0-10V DC	750-559	1
4AO 0-10V DC/T	750-559/025-000	1
Extended temperature range: -20 °C ... +60 °C		
4AO ± 10V DC (without connector)	753-557	1
4AO 0-10V DC (without connector)	753-559	1
Accessories	Item No.	Pack. Unit
	753 Series Connectors	753-110 25
	Coding elements	753-150 100
	Miniature WSB Quick marking system	
	plain	248-501 5
	with marking	see Section 11
Approvals		
Conformity marking	CE	
Korea Certification	KCC	
Marine applications (versions upon request)	ABS, BV, DNV, GL, KR, LR, NKK, PRS, RINA	
UL 508		
ANSI/ISA 12.12.01	Class I, Div. 2, Grp. ABCD, T4	
TÜV 07 ATEX 554086 X	I M2 Ex d I Mb, II 3 G Ex nA II C T4 Gc,	
	II 3 D Ex tc III C T135°C Dc	
IECEX TUN 09.0001 X	Ex d I Mb, Ex nA II C T4 Gc,	
	Ex tc III C T135°C Dc	

[illegible]