


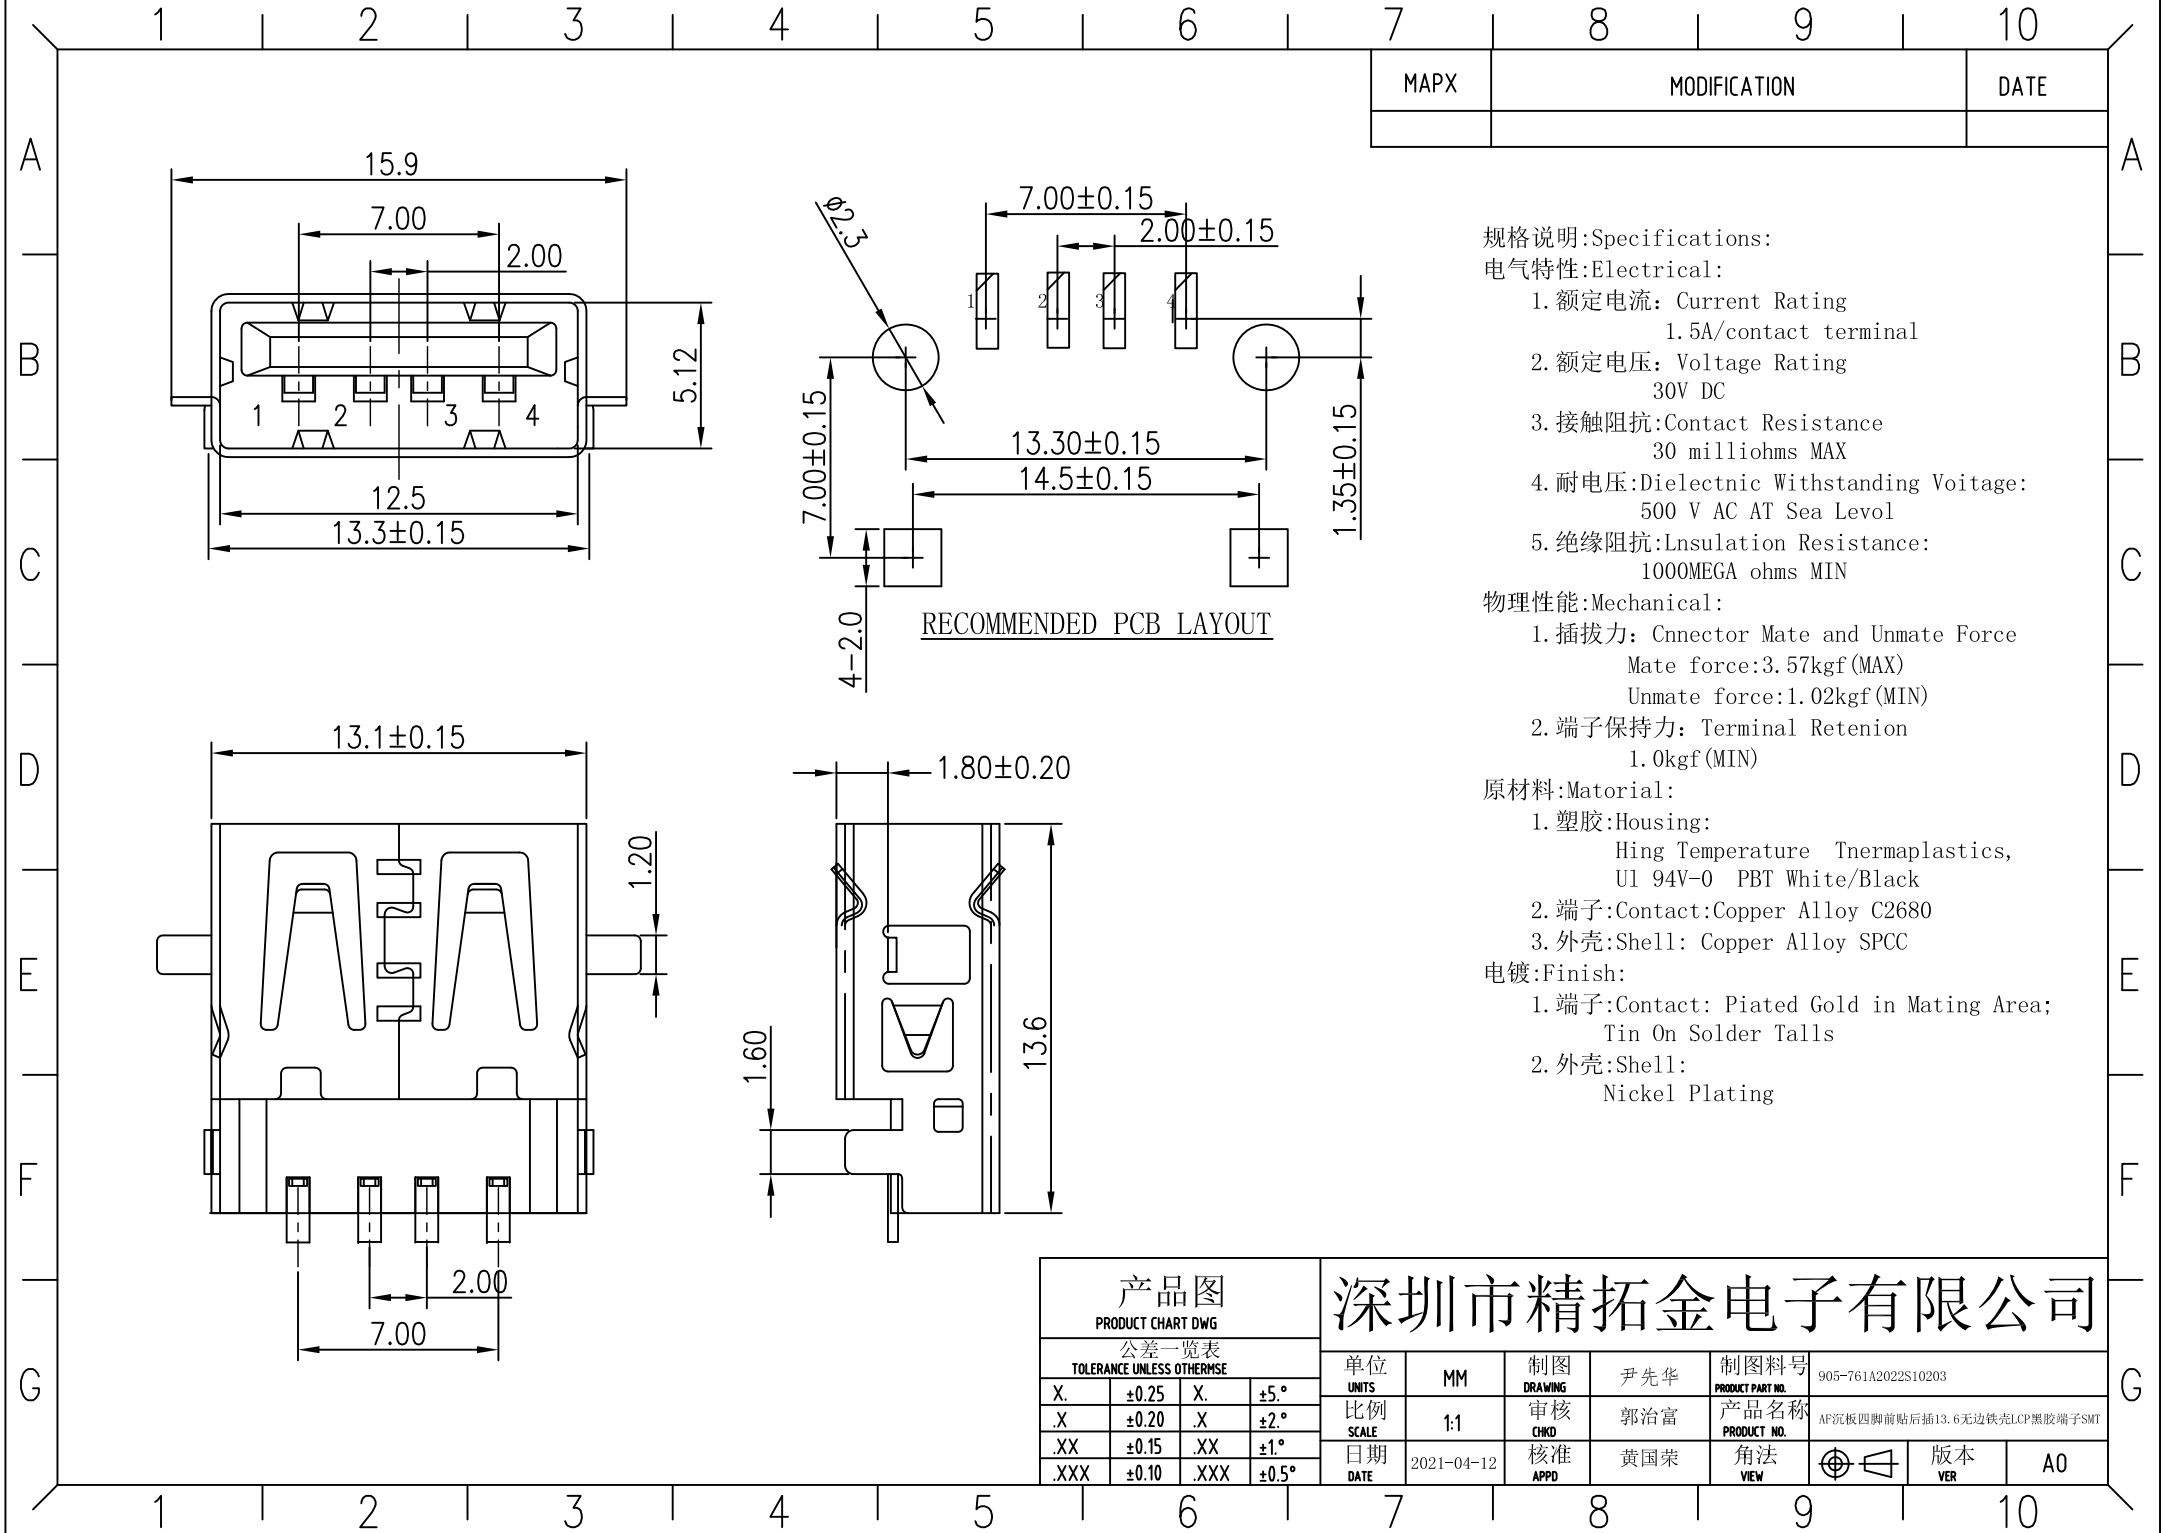

MAPX	MODIFICATION	DATE

规格说明:Specifications:
电气特性:Electrical:
1. 额定电流: Current Rating
1.5A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗:Contact Resistance
30 milliohms MAX
4. 耐电压:Dielectnc Withstanding Voitage:
500 V AC AT Sea Levol
5. 绝缘阻抗:lnsulation Resistance:
1000MEGA ohms MIN
物理性能:Mechanical:
1. 插拔力: Cnncctor Mate and Unmate Force
Mate force:3.57kgf (MAX)
Unmate force:1.02kgf (MIN)
2. 端子保持力: Terminal Retenion
1.0kgf (MIN)
原材料:Material:
1. 塑胶:Housing:
Hing Temperature Thermaplastics,
Ul 94V-0 PBT White/Black
2. 端子:Contact:Copper Alloy C2680
3. 外壳:Shell: Copper Alloy SPCC
电镀:Finish:
1. 端子:Contact: Plated Gold in Mating Area;
Tin On Solder Talls
2. 外壳:Shell:
Nickel Plating

产品图 PRODUCT CHART DWG				深圳市精拓金电子有限公司					
公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	MM	制图 DRAWING	尹先华	制图料号 PRODUCT PART NO.	905-761A2022S10203
X.	±0.25	X.	±5.°	比例 SCALE	1:1	审核 CHKD	郭治富	产品名称 PRODUCT NO.	AF沉板四脚前贴后插13.6无边铁壳LCP黑胶端子SMT
.X	±0.20	.X	±2.°	日期 DATE	2021-04-12	核准 APPD	黄国荣	角法 VIEW	
.XX	±0.15	.XX	±1.°					版本 VER	A0
.XXX	±0.10	.XXX	±0.5°						