XUVH0312



Main

Range of product	OsiSense XU	
Series name	Application material handling	
Electronic sensor type	Photo-electric sensor	
Sensor name	XUV	
Sensor design	Fork	
Detection system	Thru beam	
Emission	Infrared	
Passage width	1.18 in (30 mm)	
Passage depth	1.57 in (40 mm)	
Material	Plastic	
Supply circuit type	DC	
Wiring technique	3-wire	
Discrete output type	PNP	
Discrete output function	1 NO	
Electrical connection	Cable	
Cable length	6.56 ft (2 m)	
Product specific application	Detection of flags in lifts/transtockers	
[Sn] nominal sensing distance	1.18 in (30 mm)	

Complementary

<u></u>		
Enclosure material	ABS/PC	
Lens material	PMMA	
Type of output signal	Discrete	
Output type	Solid state	
Output function governance	Dark	
Cable composition	3 x 0.34 mm ²	
Wire insulation material	PvR	
Cable outer diameter	0.2 in (5 mm)	
Status LED	1 LED (red) output state	
[Us] rated supply voltage	24 V DC with reverse polarity protection	
Supply voltage limits	1938 V DC	
Switching capacity in mA	<= 150 mA (overload and short-circuit protection)	
Switching frequency	<= 1 kHz	
Voltage drop	<= 1.5 V (closed state)	
Current consumption	<= 20 mA (no-load)	
Delay first up	<= 30 ms	
Delay response	0.5 ms	
Delay recovery	0.5 ms	
Setting-up	Without sensitivity adjustment	
Depth	2.68 in (68 mm)	
Height	2.32 in (59 mm)	
Width	0.55 in (14 mm)	
Product weight	0.29 lb(US) (0.13 kg)	

Environment

product certifications	CE
ambient air temperature for operation	23131 °F (-555 °C)

ambient air temperature for storage	-4158 °F (-2070 °C)	
vibration resistance	7 gn, amplitude = \pm 1 mm (f = 1042 Hz) conforming to IEC 60068-2-6	
shock resistance	30 gn (duration = 11 ms) conforming to IEC 60068-2-27	
IP degree of protection	IP54 conforming to IEC 60529	


Offer Sustainability

Not Green Premium product	Not Green Premium product
Compliant - since 0931 - Schneider Electric declaration of conformity	Compliant - since 0931 - Schneider Electric declaration of conformity
Reference not containing SVHC above the threshold	Reference not containing SVHC above the threshold
WARNING: This product can expose you to chemicals including:	WARNING: This product can expose you to chemicals including:
Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and	Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and
Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm.	eDi-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm.
For more information go to www.p65warnings.ca.gov	For more information go to www.p65warnings.ca.gov

Contractual warranty

Warranty period	18 months	
-----------------	-----------	--

Dimensions

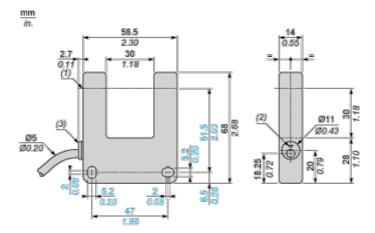

- (1) Optical axis
- (2) Red LED
- (3) Diffuser

Wiring Schemes (3-Wire DC)


NO Function

PNP Output BN + BK BU

BN: Brown
BK: Black
BU: Blue

Detection Curve





Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Schneider Electric: XUVH0312