


REVISIONS			DGC, ND, SPC-F004 * Effective; 7/B/02 * DCP No; 1398					
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
1922	Α	Released	JWM	10/14/02	ΣL	03/25/08	JN	03/25/08

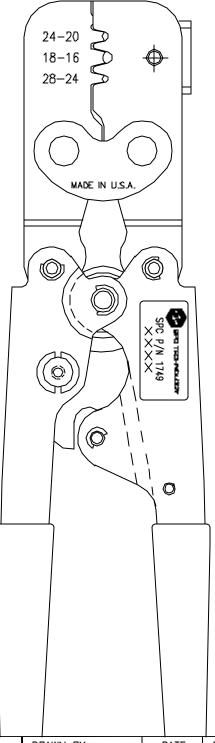

## Features:

- Crimps circular Multimate connector pins and sockets (Ref: AMP 90277)
- The conductor and insulation crimps conform to O.E.M. specifications and are produced in one tool closure.
- Conductor crimps are "B" type, insulation crimps are "Oval" which are produced in three cavities: 28~24 AWG, 24~20 AWG, and 18~16 AWG.
- A locator and wire stop are provided to orent the pins or sockets during crimping

HEAT TREATED COMPONENTS
BLACK OXIDE HANDLES
BLACK OXIDE JAW ASSEMBLY RATCHET
CONTROLLED RELEASE RATCHET SET TO
RELEASE WHEN A 70-80 LB. LOAD IS APPLIED
APPROX. 1 3/4" FROM END OF HANDLE.
BLUE TEXTURED PLASTISOL GRIPS

SPC-F004.DWG
TOLERANCES:

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

		L		
DRAWN BY:	[	DATE:		
Jeff McVicker	10/14/02			
CHECKED BY:	DATE:			
Jason Nash	03/25/08			
APPROVED BY:	DATE:			
Jason Nash	037	′25./∩8		

DRAWING TITLE:

SIZE DWG. NO.
A 1749

Crîmp Tool

ELECTRONIC FILE

92N3744.dwg

REV

Α

 ROVED BY:
 DATE:

 on Nash
 03/25/08

 SCALE:
 NTS

 U.O.M.:
 INCHES [mm]

 SHEET:
 1 OF 1

ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC
TECHNOLOGY. DISCLAIMER: ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND
RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME
ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREMITH.