


# Actuator

704.300.000I

Distribution by  
DigiKey

**DigiKey**

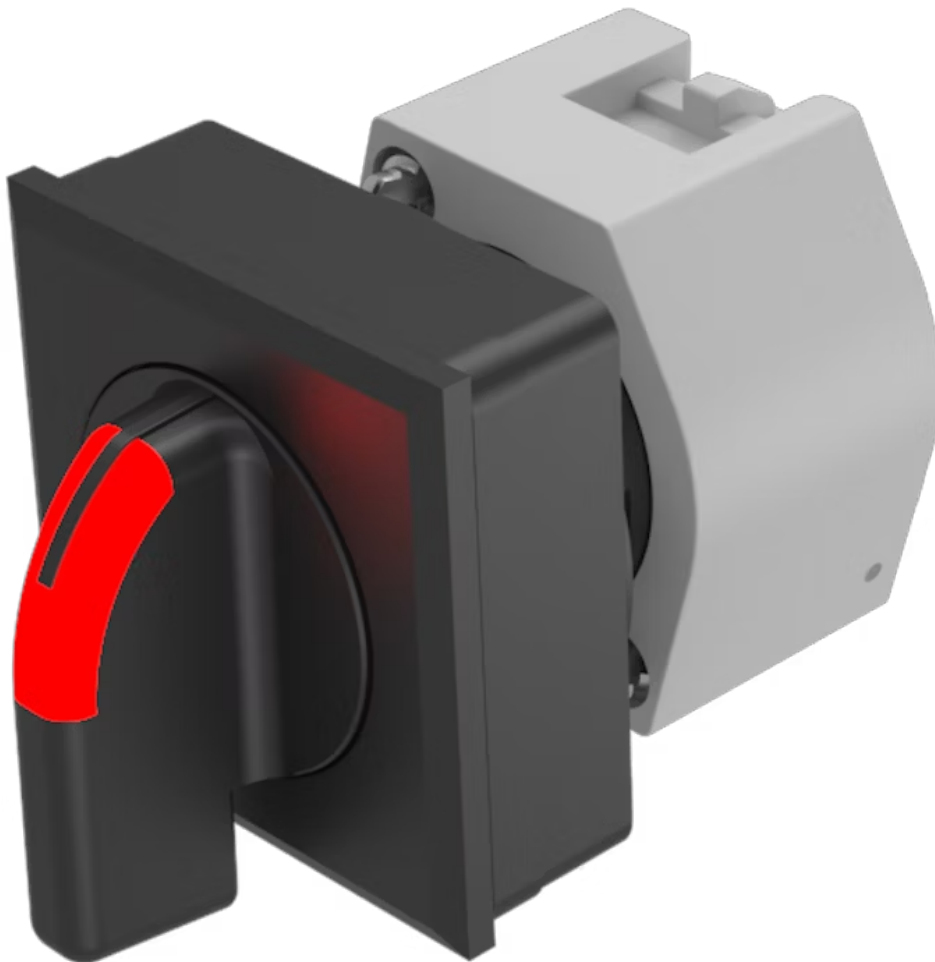

<https://digikey.eao.com/p/704.300.000I>

Your product:

---



## 704.300.000I Actuator

### FRONT

|                       |               |
|-----------------------|---------------|
| Front dimension:      | 35 mm x 35 mm |
| Front bezel material: | Plastic       |
| Front bezel colour:   | Black         |

### MOUNTING

|                   |           |
|-------------------|-----------|
| Design:           | flush     |
| Mounting cut-out: | Ø 30.5 mm |

### OPERATING-/INDICATION PART

|                 |         |
|-----------------|---------|
| Lever shape:    | long    |
| Lever material: | plastic |
| Lever colour:   | Black   |

### ELECTRICAL CHARACTERISTICS

|            |                                                                                           |
|------------|-------------------------------------------------------------------------------------------|
| Standards: | The switches comply with the "Standards for low-voltage switching devices" DIN EN 60947-1 |
|------------|-------------------------------------------------------------------------------------------|

### MECHANICAL CHARACTERISTIC

|                             |                               |
|-----------------------------|-------------------------------|
| <b>Switching positions:</b> | 2 positions                   |
| <b>Switching action:</b>    | Rest - Maintained             |
| <b>Switching angle:</b>     | 90° right                     |
| <b>Weight:</b>              | 0.056 kg                      |
| <b>Mechanical lifetime:</b> | ≤2.5 Mio. cycles of operation |

## AMBIENT CONDITION

|                               |                     |
|-------------------------------|---------------------|
| <b>Storage temperature:</b>   | – 40 °C ... + 85 °C |
| <b>Operating temperature:</b> | – 40 °C ... + 55 °C |
| <b>IP Protection:</b>         | IP65 front side     |


## OTHER

|               |                                             |
|---------------|---------------------------------------------|
| <b>Hints:</b> | Max. 3 switching elements can be clipped on |
|---------------|---------------------------------------------|


|                           |                                                                                                           |
|---------------------------|-----------------------------------------------------------------------------------------------------------|
| <b>Short Description:</b> | Actuator, Ø 30.5 mm, 35 mm x 35 mm, optional illuminative, Black, long, Black, Plastic, Rest - Maintained |
|---------------------------|-----------------------------------------------------------------------------------------------------------|

|                                           |   |
|-------------------------------------------|---|
| <b>max. number of switching elements:</b> | 3 |
|-------------------------------------------|---|


### Wiring diagrams:

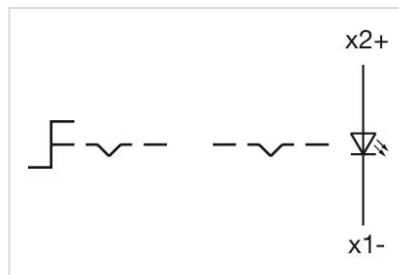

### Switching positions:

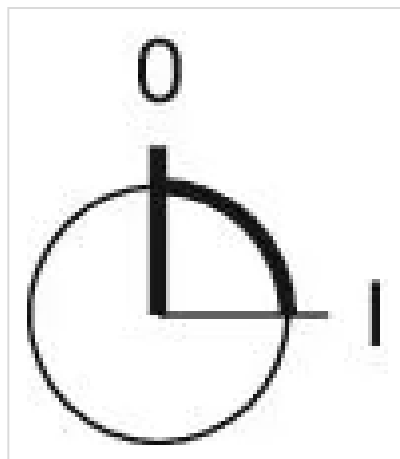


### Mounting cut-outs:

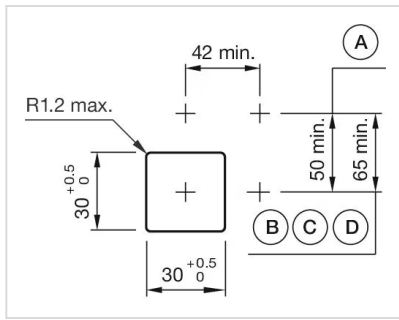

A = Screw terminal  
 B = Push-in terminal (PIT)  
 C = Plug-in terminal 6.3 mm x 0.8 mm  
 D = Double plug-in terminal 6.3v x 0.8 mm

# **Dimension drawings:**

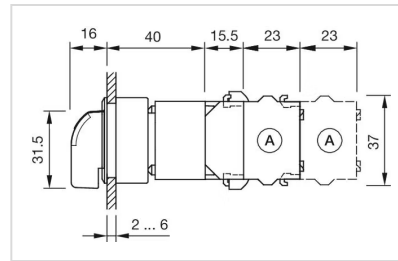

A = Screw terminal