


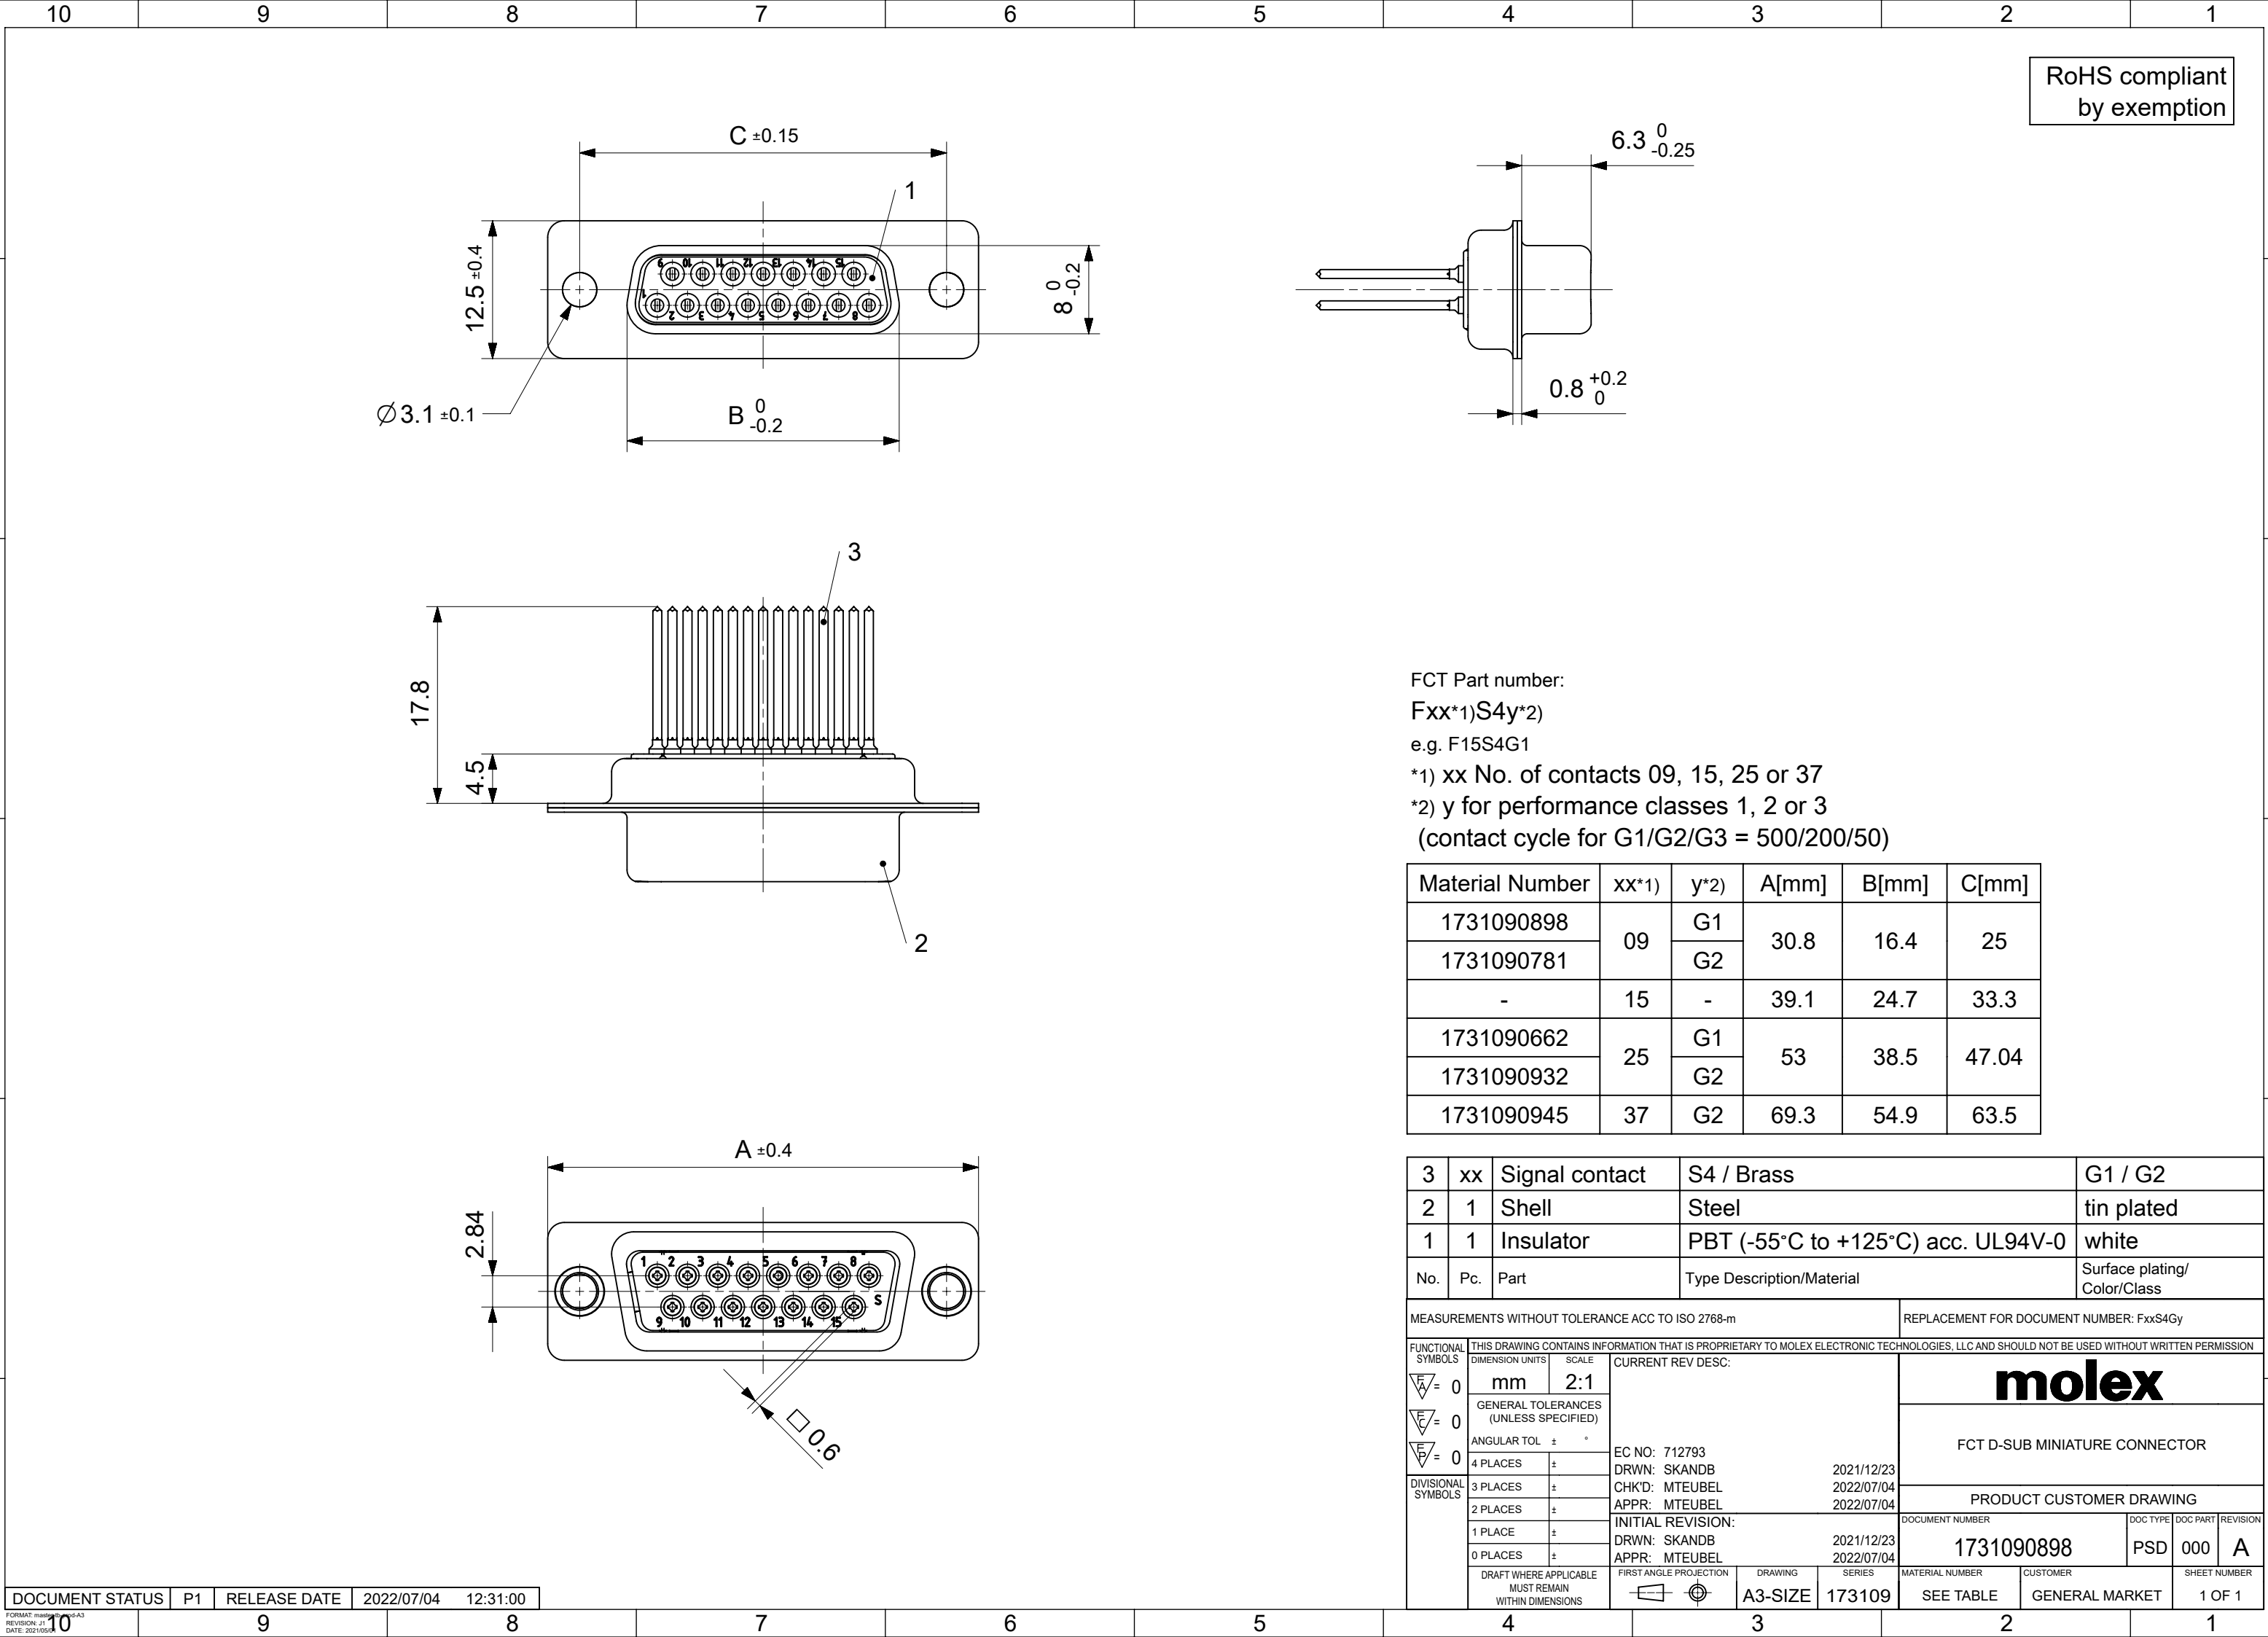


RoHS compliant
by exemption

FCT Part number:
Fxx*1)S4y*2)
e.g. F15S4G1
*1) xx No. of contacts 09, 15, 25 or 37
*2) y for performance classes 1, 2 or 3
(contact cycle for G1/G2/G3 = 500/200/50)

Material Number	xx*1)	y*2)	A[mm]	B[mm]	C[mm]
1731090898	09	G1	30.8	16.4	25
1731090781		G2			
-	15	-	39.1	24.7	33.3
1731090662	25	G1	53	38.5	47.04
1731090932		G2			
1731090945	37	G2	69.3	54.9	63.5

3	xx	Signal contact	S4 / Brass	G1 / G2
2	1	Shell	Steel	tin plated
1	1	Insulator	PBT (-55°C to +125°C) acc. UL94V-0	white
No.	Pc.	Part	Type Description/Material	Surface plating/ Color/Class

MEASUREMENTS WITHOUT TOLERANCE ACC TO ISO 2768-m					REPLACEMENT FOR DOCUMENT NUMBER: FxxS4Gy					
FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					molex FCT D-SUB MINIATURE CONNECTOR				
	DIMENSION UNITS	SCALE	CURRENT REV DESC: EC NO: 712793 DRWN: SKANDB 2021/12/23 CHK'D: MTEUBEL 2022/07/04 APPR: MTEUBEL 2022/07/04 INITIAL REVISION: DRWN: SKANDB 2021/12/23 APPR: MTEUBEL 2022/07/04							
mm	2:1									
GENERAL TOLERANCES (UNLESS SPECIFIED)										
ANGULAR TOL ± °										
DIVISIONAL SYMBOLS	4 PLACES	±								
	3 PLACES	±								
	2 PLACES	±								
	1 PLACE	±								
	0 PLACES	±								
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		FIRST ANGLE PROJECTION	DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER	SHEET NUMBER			
			A3-SIZE	173109	SEE TABLE	GENERAL MARKET	1 OF 1			