



# DL100-23AB2103

Dx100

LONG RANGE DISTANCE SENSORS

**SICK**  
Sensor Intelligence.



Illustration may differ



### Ordering information

| Type           | Part no. |
|----------------|----------|
| DL100-23AB2103 | 1060950  |

Other models and accessories → [www.sick.com/Dx100](http://www.sick.com/Dx100)

### Detailed technical data

#### Features

|                                        |                                                                                                                                                                  |
|----------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Scope</b>                           | Indoor                                                                                                                                                           |
| <b>Measurement range min ... max:</b>  | 0.15 m ... 300 m, on "diamond grade" reflective tape                                                                                                             |
| <b>Target</b>                          | Reflector                                                                                                                                                        |
| <b>Resolution</b>                      | 0.1 mm, 0.125 mm, 1 mm, 10 mm, 100 mm                                                                                                                            |
| <b>Repeatability</b>                   | 2 mm <sup>1)</sup>                                                                                                                                               |
| <b>Measurement accuracy</b>            | ± 3 mm <sup>2)</sup>                                                                                                                                             |
| <b>Response time</b>                   | 2 ms                                                                                                                                                             |
| <b>Measurement cycle time</b>          | 1 ms                                                                                                                                                             |
| <b>Output time</b>                     | 1 ms                                                                                                                                                             |
| <b>Light source</b>                    | Laser, red <sup>3)</sup><br>visible red light                                                                                                                    |
| <b>Type of light</b>                   | Visible red light                                                                                                                                                |
| <b>Laser class</b>                     | 2, complies with 21 CFR 1040.10 and 1040.11 except for the conformance according to "Laser Notice No. 50" from June 24, 2007 (IEC 60825-1:2014, EN 60825-1:2014) |
| <b>Typ. light spot size (distance)</b> | 5 mm + (2 mm x distance in m)                                                                                                                                    |
| <b>Max. movement speed</b>             | 15 m/s                                                                                                                                                           |
| <b>Acceleration (max.)</b>             | ≤ 15 m/s <sup>2</sup>                                                                                                                                            |
| <b>Safety-related parameters</b>       |                                                                                                                                                                  |
|                                        | MTTF <sub>D</sub> 101 years                                                                                                                                      |
|                                        | DC <sub>avg</sub> 0%                                                                                                                                             |

<sup>1)</sup> Statistical error 1 σ, environmental conditions constant, min. warm-up time 10 min.

<sup>2)</sup> From 150 mm ... 180 mm measuring range the accuracy can reach ± 4 mm.

<sup>3)</sup> Average service life: 100,000 h at T<sub>U</sub> = +25 °C.

#### Interfaces

|               |           |
|---------------|-----------|
| <b>Serial</b> | ✓, RS-422 |
|---------------|-----------|

<sup>1)</sup> HIGH = > V<sub>S</sub> - 3 V / LOW = < 2 V.

<sup>2)</sup> Max. 100 nF/20 mH.

<sup>3)</sup> HIGH > 12 V / LOW < 3 V.

|                                   |                                       |                                                                                                                                                                                                                                                                                                                                                                                                 |
|-----------------------------------|---------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Digital output</b>             | Number                                | 2 <sup>1)</sup>                                                                                                                                                                                                                                                                                                                                                                                 |
|                                   | Type                                  | Push-pull: PNP/NPN                                                                                                                                                                                                                                                                                                                                                                              |
|                                   | Function                              | Distance: Distance switching output<br>Speed: Speed output<br>Service: Warning message as the sensor ages, if the damping value is exceeded (for example when contaminated, if the permitted interior device temperature is exceeded or undercut, if the measured value has a plausibility error, if the laser is not ready for operation, if the heating is switched on<br>Laser off<br>Preset |
|                                   | Maximum output current I <sub>A</sub> | ≤ 100 mA <sup>2)</sup>                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Multifunctional input (MF)</b> |                                       | 1 x MF1 <sup>3)</sup>                                                                                                                                                                                                                                                                                                                                                                           |

<sup>1)</sup> HIGH = > V<sub>S</sub> - 3 V / LOW = < 2 V.

<sup>2)</sup> Max. 100 nF/20 mH.

<sup>3)</sup> HIGH > 12 V / LOW < 3 V.

## Electronics

|                                     |                                        |
|-------------------------------------|----------------------------------------|
| <b>Supply voltage U<sub>B</sub></b> | DC 18 V ... 30 V, limit values         |
| <b>Current consumption</b>          | At 24 V DC < 250 mA                    |
| <b>Ripple</b>                       | 5 V <sub>pp</sub> <sup>1)</sup>        |
| <b>Modulation frequency</b>         | Adjustable                             |
| <b>Initialization time</b>          | Typ. 1.5 s <sup>2)</sup>               |
| <b>Indication</b>                   | 6 digit 5 x 7 dot matrix display, LEDs |
| <b>Enclosure rating</b>             | IP65                                   |
| <b>Protection class</b>             | III                                    |

<sup>1)</sup> May not fall short of or exceed V<sub>S</sub> tolerances.

<sup>2)</sup> After loss of reflector < 40 ms.

## Mechanics

|                               |                                                        |
|-------------------------------|--------------------------------------------------------|
| <b>Dimensions (W x H x D)</b> | 69.4 mm x 82.5 mm x 100.2 mm                           |
| <b>Housing material</b>       | Metal (Aluminum die cast)                              |
| <b>Window material</b>        | Plastic (PMMA)                                         |
| <b>Weight</b>                 | Approx. 800 g (with mounting bracket: approx. 1,600 g) |
| <b>Connection type</b>        | Male connector, M12, SPEEDCON™ compatible              |

## Ambient data

|                                       |                                                                                                 |
|---------------------------------------|-------------------------------------------------------------------------------------------------|
| <b>Ambient temperature, operation</b> | -20 °C ... +55 °C <sup>1)</sup><br>-20 °C ... +75 °C, operation with cooling case <sup>1)</sup> |
| <b>Ambient temperature, storage</b>   | -40 °C ... +75 °C                                                                               |
| <b>Effect of air pressure</b>         | 0.3 ppm/hPa                                                                                     |
| <b>Effect of air temperature</b>      | 1 ppm/K                                                                                         |
| <b>Temperature drift</b>              | Typ. 0.1 mm/K                                                                                   |
| <b>Typ. Ambient light immunity</b>    | ≤ 100,000 lx                                                                                    |
| <b>Mechanical load</b>                | Shock: (EN 600 68-2-27)                                                                         |

<sup>1)</sup> Temperatures < -10 °C require warm-up time of typ. 7 minutes.

<sup>2)</sup> This is a Class A device. This device can cause radio interference in living quarters.

|                                            |                                                  |
|--------------------------------------------|--------------------------------------------------|
|                                            | Sine: (EN 600 68-2-6)<br>Noise: (EN 600 68-2-64) |
| <b>Electromagnetic compatibility (EMC)</b> | EN 61000-6-2, EN 61000-6-4 <sup>2)</sup>         |

<sup>1)</sup> Temperatures < -10 °C require warm-up time of typ. 7 minutes.  
<sup>2)</sup> This is a Class A device. This device can cause radio interference in living quarters.

Classifications

|                       |          |
|-----------------------|----------|
| <b>ECLASS 5.0</b>     | 27270801 |
| <b>ECLASS 5.1.4</b>   | 27270801 |
| <b>ECLASS 6.0</b>     | 27270801 |
| <b>ECLASS 6.2</b>     | 27270801 |
| <b>ECLASS 7.0</b>     | 27270801 |
| <b>ECLASS 8.0</b>     | 27270801 |
| <b>ECLASS 8.1</b>     | 27270801 |
| <b>ECLASS 9.0</b>     | 27270801 |
| <b>ECLASS 10.0</b>    | 27270801 |
| <b>ECLASS 11.0</b>    | 27270801 |
| <b>ECLASS 12.0</b>    | 27270916 |
| <b>ETIM 5.0</b>       | EC001825 |
| <b>ETIM 6.0</b>       | EC001825 |
| <b>ETIM 7.0</b>       | EC001825 |
| <b>ETIM 8.0</b>       | EC001825 |
| <b>UNSPSC 16.0901</b> | 41111613 |

## Dimensional drawing (Dimensions in mm (inch))

Dimensional drawing




- ① Optical axis, sender
- ② Optical axis, receiver
- ③ Zero level
- ④ Threaded mounting hole M5
- ⑤ Status LED [status]
- ⑥ Display
- ⑦ Control elements

## Connection type

Ethernet connection type




SSI/RS-422 connection type




Connection diagram

SSI/RS-422 connection diagram




Ethernet connection diagram



Adjustment possible

DL100-xxXXxx02

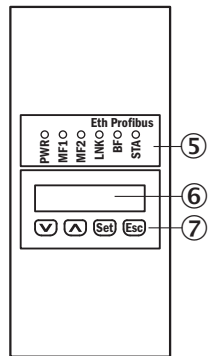

- ⑤ Status LED [status]
- ⑥ Display
- ⑦ Control elements

## Recommended accessories

Other models and accessories → [www.sick.com/Dx100](http://www.sick.com/Dx100)

|                                                                                     | Brief description                                                                                                                                                                                                                                                                                                                                               | Type                                      | Part no. |
|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------|----------|
| Sets and kits                                                                       |                                                                                                                                                                                                                                                                                                                                                                 |                                           |          |
|    | Accessory kit for upgrade from DME3000 SSI/RS-422 to Dx100 SSI/RS-422                                                                                                                                                                                                                                                                                           | DME3000 Dx100 SSI/RS-422 upgrade kit      | 2065223  |
|    | Accessory kit for upgrade from DME4000/5000 SSI/RS-422 to Dx100 SSI/RS-422                                                                                                                                                                                                                                                                                      | DME4000/5000 Dx100 SSI/RS-422 upgrade kit | 2065221  |
| Reflectors                                                                          |                                                                                                                                                                                                                                                                                                                                                                 |                                           |          |
|    | Reflector plate, "diamond grade" reflective tape, 330 mm x 330 mm, base plate material: aluminum, screw connection, Screw-on, 4 hole mounting                                                                                                                                                                                                                   | PL240DG                                   | 1017910  |
|    | Reflector plate, "diamond grade" reflective tape, 665 mm x 665 mm, base plate material: aluminum, screw connection, Screw-on, 4 hole mounting                                                                                                                                                                                                                   | PL560DG                                   | 1016806  |
| Terminal and alignment brackets                                                     |                                                                                                                                                                                                                                                                                                                                                                 |                                           |          |
|    | Alignment unit for Dx100, incl. mounting material, steel, zinc coated                                                                                                                                                                                                                                                                                           | BEF-AH-DX100                              | 2058653  |
| Others                                                                              |                                                                                                                                                                                                                                                                                                                                                                 |                                           |          |
|   | <ul style="list-style-type: none"> <li><b>Connection type head A:</b> Female connector, M12, 8-pin, straight</li> <li><b>Connection type head B:</b> Flying leads</li> <li><b>Cable:</b> 5 m, 8-wire, PUR, halogen-free</li> <li><b>Description:</b> Shielded</li> </ul>                                                                                        | YF2A68-050XXXLEAX                         | 6032449  |
|  | <ul style="list-style-type: none"> <li><b>Connection type head A:</b> Male connector, M12, 4-pin, straight, D-coded</li> <li><b>Connection type head B:</b> Male connector, RJ45, 8-pin, straight</li> <li><b>Signal type:</b> PROFINET</li> <li><b>Cable:</b> 5 m, 4-wire, AWG22, PUR, halogen-free</li> <li><b>Description:</b> PROFINET, shielded</li> </ul> | SSL-2J04-G05MZ                            | 6035389  |
|  | <ul style="list-style-type: none"> <li><b>Connection type head A:</b> Female connector, M12, 8-pin, angled, A-coded</li> <li><b>Connection type head B:</b> Male connector, M12, 8-pin, A-coded</li> <li><b>Cable:</b> 5 m, 8-wire, PUR</li> </ul>                                                                                                              | YG2A88-050XXXM2A88                        | 6049328  |
|  | <ul style="list-style-type: none"> <li><b>Connection type head A:</b> Female connector, M12, 8-pin, A-coded</li> <li><b>Connection type head B:</b> Flying leads</li> <li><b>Connection type head C:</b> Flying leads</li> <li><b>Cable:</b> 2 m, PUR</li> <li><b>Description:</b> Twisted pairs, shielded</li> </ul>                                           | YF2A28-020XXXLEAX Y-junctions             | 6048329  |
|  | <ul style="list-style-type: none"> <li><b>Connection type head A:</b> Female connector, M12, 8-pin, angled, A-coded</li> <li><b>Connection type head B:</b> Male connector, M12, 8-pin, straight, A-coded</li> <li><b>Cable:</b> 0.6 m, 8-wire, PUR</li> </ul>                                                                                                  | YG2A88-C60XXXM2A88                        | 6048801  |

## SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

**For us, that is “Sensor Intelligence.”**

## WORLDWIDE PRESENCE:

Contacts and other locations –[www.sick.com](http://www.sick.com)