

COIL: @ 25°C

RESISTANCE 675 OHMS ± 10%

NOMINAL VOLTAGE 26.5 VDC

MUST OPERATE 13.5 VDC

MUST RELEASE 1.47 VDC

ENVIRONMENT:

VIBRATION 10 CPS TO 2000 CPS @ 20 g's


SHOCK 100 g's 6 ± 1 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES:

CUSTOMER DATA SHEET

BLUE BEAD

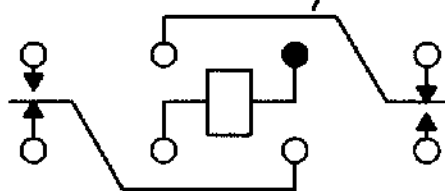

CONTACT RATING: 5 AMPS 28 VDC
RESISTIVE 100,000 OPERATIONS

DR. R.B. 11/11/93 CK. V/11/23 JAB

**COMMUNICATIONS
INSTRUMENTS, INC.**

CUST. C. I. I. STD.

CUST. NO.

TYPE 'FW' RELAY

FW5A1220G00

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[FW5A1220E00](#) [FW5A1220G00](#)