



1	2	3	4	5	6	7	8	
F				REV.	ECN NO.	DATE	SIGN	DESCRIPTION
E	B	LEN-870081~84	2008/07/18	Ivan	Update the drawing view			
D	C	LEN-980036~39	2009/07/24	Rita	Update note			
C	D	LEN1530019~022	2015/02/12	Vicky	Update Logo			




Pin Assignments Front View

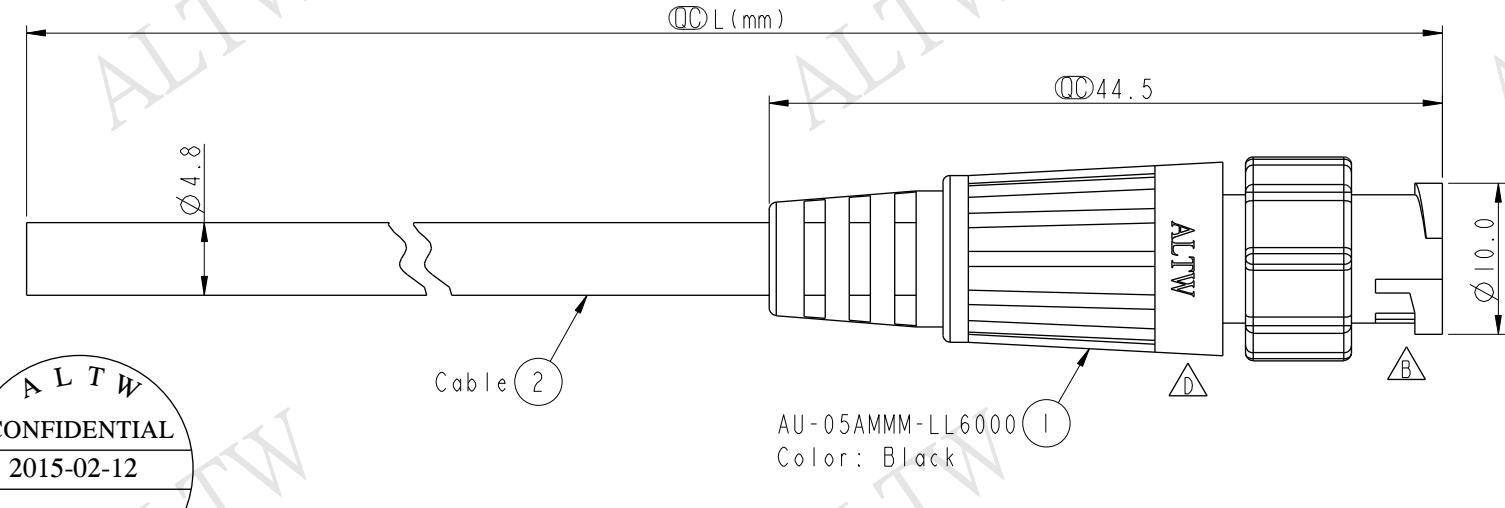

Front View Drawing showing dimensions: ØD L (mm), ØD 44.5, Ø 4.8, Ø 10.0. Part number AU-05AMMM-LL6AXX. Color: Black. Pin assignments: 1 (Green), 2 (Brown), 3 (Red), 4 (White), 5 (Yellow). Cable length tolerance: 01~99Meters. Connector type: AU-05AMMM-LL6000 Conn.



CONFIDENTIAL  
2015-02-12  
R&D DEPT.



DCC. DEPT.  
CONFIDENTIAL  
2015.03.04  
ISSUED

AU-05AMMM-LL6AXX

XX: 01~99Meters  
01: 01Meter  
02: 02Meters  
:  
:  
99: 99Meters

Cable Length(L): 01~99Meters

Note:  
 \* ØD Important Dimension  
 \* Waterproof Rate: IP66  
 \* Connector: Nylon+GF, Black  
 \* Male Pin: Copper Alloy, Gold Plated  
 \* Cable: UL2464 26AWG\*5C+Drain+Al/My, Black, PVC Jacket, UV Resistant, OD4.8mm  
 \* Cable Length Tolerance: 01M: ±40mm  
 02M~05M: ±60mm  
 06M~10M: ±100mm  
 11M~30M: ±200mm  
 31M~99M: ±500mm

UNIT:mm		TITLE: Mini Cable Lock 5Pin M Conn M Pin		
TOLERANCE	SCALE: 2:1 SIZE: A4 SHEET: 1 OF 1 REV: D WC-REV: A.1 ØD: Inspection item			Amphenol LTW 安費諾亮泰企業股份有限公司
±0.5 mm				ITEM NO: _____ DRAWN BY: Vicky DATE: 2015-02-12
				DWG NO: AU-05AMMM-LL6AXX CHECKED BY: Rita DATE: 2015-02-12
				CUSTOMER: ALTW APPROVED BY: Lion DATE: 2015-02-12

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[AU-05AMMM-LL6A10](#) [AU-05AMMM-LL6A05](#) [AU-05AMMM-LL6A01](#) [AU-05AMMM-LL6A02](#)