
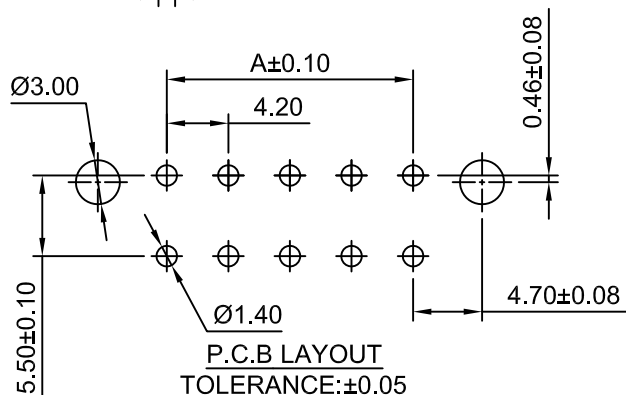
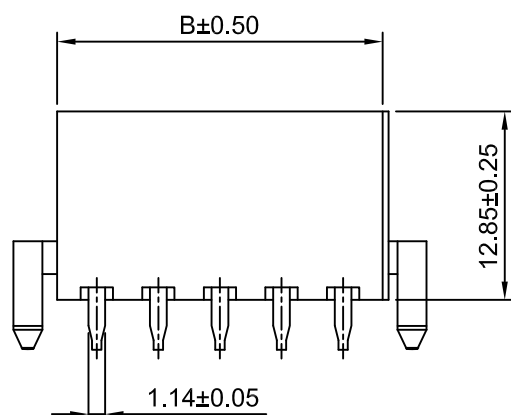


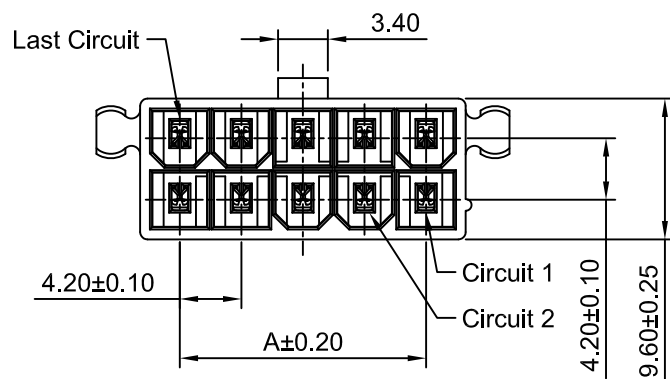

Ordering Information:
C4201WVA-F-2xXP - ** - *** - ***
1 2 3 4

1.Part NO.

2.Material:

(Blank): Nylon 66,UL94V-2 (Natural)

V0: Nylon 66,UL94V-0 (White)

LCP: LCP,UL94V-0 (Beige)

9T: Nylon 9T,UL94V-0 (Beige)

GWT: Nylon 66,UL94V-0(Beige),IEC 60335-1,5th Edition

Glow Wire Capable.

GWT-BK: Nylon 66,UL94V-0(Black),IEC 60335-1,5th Edition

Glow Wire Capable.

3.Color:

(Blank): see section 2 material

BK: Black RD: Red

YL: Yellow BL: Blue

4.Pin Material & Finish:

(Blank):Brass/Tin over Nickel

G:Brass/Gold over Nickel(Au:1µin[0.03µm] Min)

G3: Gold over Nickel(Au:3µin[0.08µm] Min,Mating Area)

G15:Brass/Gold over Nickel(Au:15µin[0.38µm] Min,Mating Area)



G30:Brass/Gold over Nickel(Au:30µin[0.76µm] Min,Mating Area)

TCA:Copper Alloy/Tin over Nickel

GCA:Copper Alloy/Gold over Nickel(Au:1µin[0.03µm] Min)

GCA-G15:Copper Alloy/Gold over Nickel(Au:15µin[0.38µm] Min,Mating Area)

GCA-G30:Copper Alloy/Gold over Nickel(Au:30µin[0.76µm] Min,Mating Area)

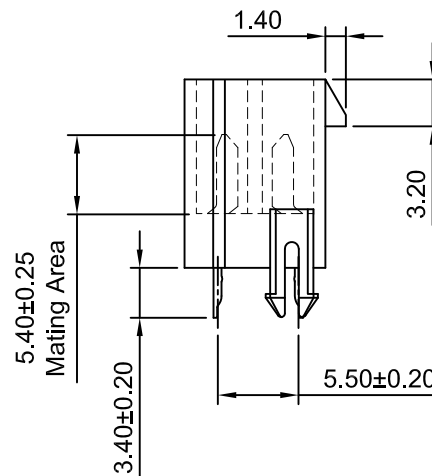

SPECIFICATIONS:

Current Rating: 9A AC,DC(Max)

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Ordering Information & Dimensions



Part NO.	Dimensions(mm)	
	A	B
C4201WVA-F-2x1P	---	5.60
C4201WVA-F-2x2P	4.20	9.80
C4201WVA-F-2x3P	8.40	14.00
C4201WVA-F-2x4P	12.60	18.20
C4201WVA-F-2x5P	16.80	22.40
C4201WVA-F-2x6P	21.00	26.60
C4201WVA-F-2x7P	25.20	30.80
C4201WVA-F-2x8P	29.40	35.00
C4201WVA-F-2x9P	33.60	39.20
C4201WVA-F-2x10P	37.80	43.40
C4201WVA-F-2x11P	42.00	47.60
C4201WVA-F-2x12P	46.20	51.80

CJTconn



CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	2:1	1 of 2	4.20mm PITCH	
DRWN	CHKD	APPR	180° DUAL ROW WAFER WITH	
Dengchun Yi	Djankui Wan	Jack Yin	FOOT- WITH DRAIN HOLES	
General Tolerances			DRAWING NO.	
x.xx±0.25			C4201WVA-F-2xXP	
x.xx±0.20			REV	
x.xxx±0.15			A3	
ANGLES ±1°				



A3	CHANGE THE DRAWING	2020.11.27
A2	NEW RELEASE	2019.03.28
A1	CHANGE THE DRAWING	2018.03.12
A0	NEW RELEASE	2005.05.10
REV	DESCRIPTION	DATE





2x12P





2x11P





2x10P



2x9P



2x8P



2x7P

A3	CHANGE THE DRAWING	2020.11.27
A2	NEW RELEASE	2019.03.28
A1	CHANGE THE DRAWING	2018.03.12
A0	NEW RELEASE	2005.05.10
REV	DESCRIPTION	DATE

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			TITLE	
Unit	Scale	Sheet	4.20mm PITCH 180° DUAL ROW WAFER WITH FOOT- WITH DRAIN HOLES	
mm	2:1	2 of 2		
DRWN	CHK'D	APPR	DRAWING NO.	
Dengchun Yi	Djankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	C4201WVA-F-2xXP	
x.xx±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°			REV A3	