

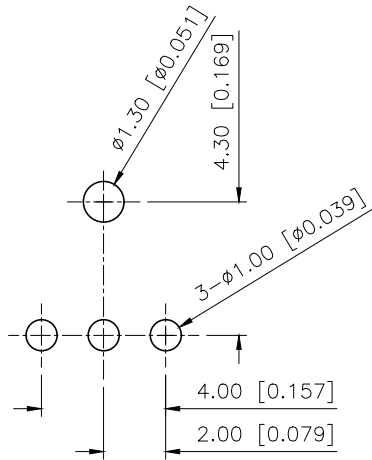
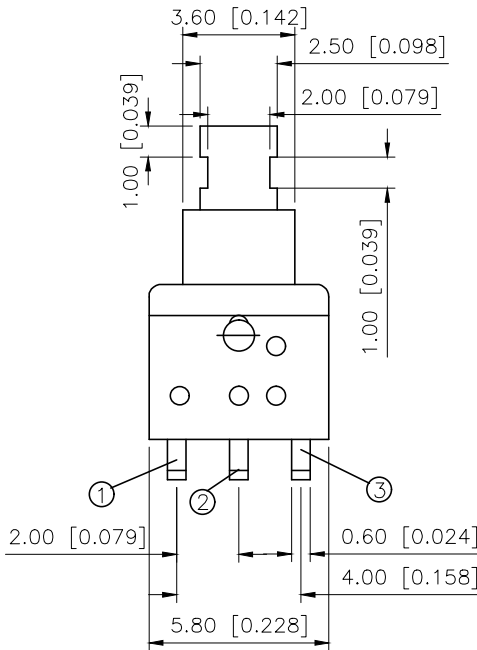


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.06.23	阿树

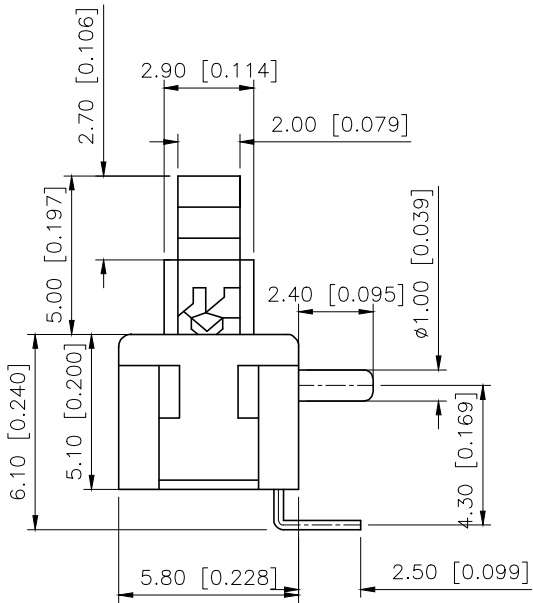

SCHEMATIC(NON-SHORTING)

FEATURES
Light operating force
Long term low contact resistance
Momentary or latching operation
Compact spacing on PCB of 5.8mm
Short stroke 1.5mm to latch

■ SPECIFICATIONS

1.ELECTRICAL

Contact rating	0.1A,30VDC
Contact resistance	50mΩ Max
Insulation resistance	100MΩ Min .at 250VDC
Dielectric strength	250VAC Min .for 60sec

2.MECHANICAL AND ENVIRONMENTAL

Temperature rating	Operating -15 to +55 storage.-25 to +65
Operation	160±80gf
Stroke	Lock Stroke .1.5±0.2mm Full stroke,2.0±0.2mm
Operating life	Full load:1x10 ⁴ cycles NO load:1x10 ⁵ cycles
Contact form	DPDT

PAPT NO	XKB5858-X-C
OPERATION	W:NO LOCK Z:LOCK

7	Contact	2	Phosphor Bronze	Plating silvering
6	Terminal	6	Brass	Plating silvering
5	Spring	1	Sus	Natural
4	Base	1	Nylon	
3	Crochet Needle	1	Sus	Natural
2	Cover	1	Nylon	
1	Keystake	1	Nylon	
ITEM	PAPT NAMF	QTY	MATERIAL	FINISHING

P.C.B LAYOUT
BOTTOM VIEW

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	MODEL TYPE: KEY SWITCH
CHECKED		UNIT: mm/in	PART NO.: XKB5858-X-C
APPROVED		SIZE: A4	DWG NO.: