
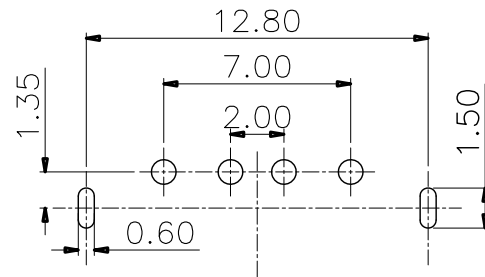
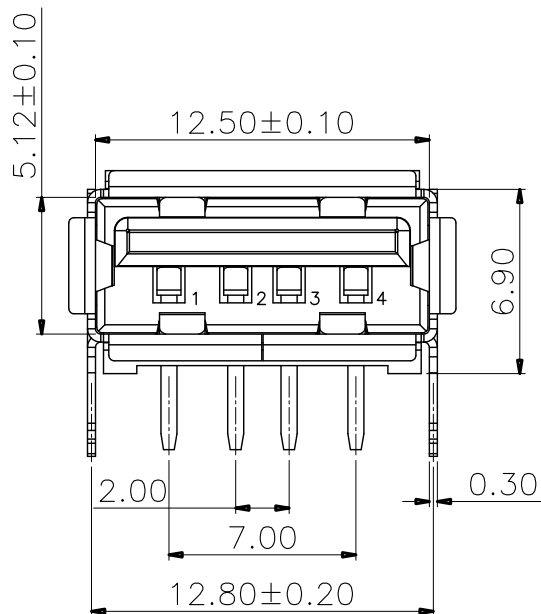



由Autodesk教育版产品制作

由Autodesk教育版产品制作

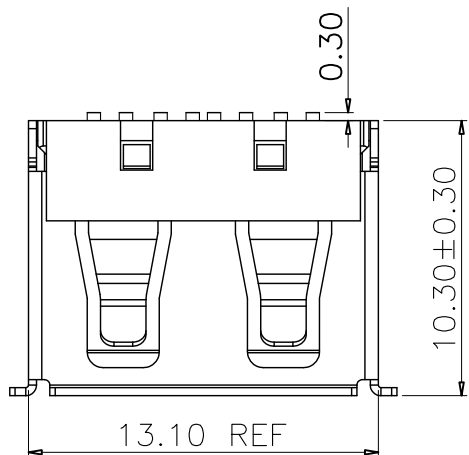

PCB HOLES(THE PATTERN SIDE)

NOTE:GENERAL TOLERANCE:±0.1mm

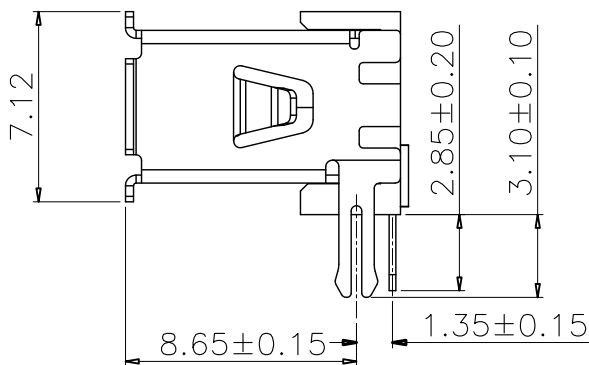

NOTES:

1. HOUSING: SEE NOTES,  
TERMINAL: SEE NOTES.  
SHELL: SEE NOTES.

SPECIFICATION:

1. ELECTRICAL CHARACTERISTIC:  
CONTACT RESISTANCE: 30MΩ MAX  
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1MIN  
INSULATION RESISTANCE: 1000MΩ MIN  
2. MECHANICAL CHARACTERISTIC:  
INSERTION FORCE: 35N(3.57KGF) MAX  
EXTRACTION FORCE: 10~35N(1.02~3.57KGF) MIN  
DURABILITY: 1500 CYCLES EXTRACTION FORCE:10~35N  
5000 CYCLES MIN  
5000 CYCLES EXTRACTION FORCE:3~35N  
3. ENVIRONMENTAL:  
OPERATING TEMPERATURE: -55℃+85℃  
4. Contact finish:  
01:Selective Gold Flash  
02:Selective Gold 3U"  
03:Selective Gold 5U"  
04:Selective Gold 15U"  
05:Selective Gold 30U"

产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE

|      |       |      |       |
|------|-------|------|-------|
| X    | ±0.15 | X    | ±5.°  |
| .X   | ±0.10 | .X   | ±2.°  |
| .XX  | ±0.05 | .XX  | ±1.°  |
| .XXX | ±0.03 | .XXX | ±0.5° |

深圳市精拓金电子有限公司

|             |            |               |       |                         |                      |
|-------------|------------|---------------|-------|-------------------------|----------------------|
| 单位<br>UNITS | MM         | 制图<br>DRAWING | Z-Y-B | 制图料号<br>PRODUCT PART NO | USB A/F 10.0-B-004   |
| 比例<br>SCALE | 1:1        | 审核<br>CHKD    |       | 产品名称<br>PRODUCT NO      | USB A/F 10.0 (后两脚有边) |
| 日期<br>DATE  | 2010.05.06 | 核准<br>APPD    |       | 角法<br>VIEW              | 版本<br>VER            |
|             |            |               |       |                         | AO                   |

由Autodesk教育版产品制作