




+ CONNECTORS

CIRCULAR DIN CONNECTORS

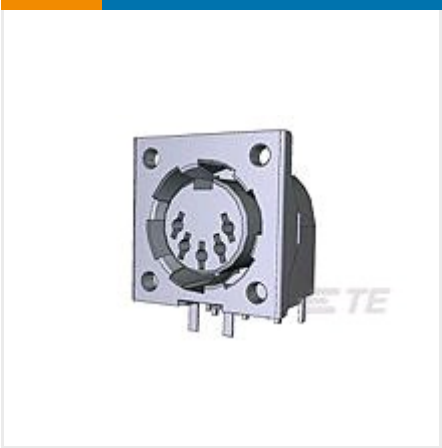

☒ Obsolete

TE CONNECTIVITY (TE)
5 CIRC DIN RCPT,GRND SHIELD

[Circular Din](#) | [Circular DIN](#)

5520904-1
TE Internal Number: 5520904-1

[EU RoHS Compliant](#)
[EU ELV Compliant](#)

Connector Style Receptacle
Connector System Wire-to-Board, Wire-to-Panel
Number of Positions 5
Selectively Loaded Yes
Mating Alignment With

[↓](#) **PRODUCT DRAWING**
English

[↓](#) **3D PDF**

DOCUMENTATION

Product Drawings

CIRCULAR DIN SHIELDED RECEPTACLE, 5 POSITION

PDF [\(TIFF AVAILABLE\)](#)

English

CAD Files

3D PDF

PDF

English

Customer View Model

2D_DXF.ZIP

English

Customer View Model

3D_IGS.ZIP

English

Customer View Model

3D_STP.ZIP

English

Product Specifications

Application Specification

Circular DIN Standard And Shielded Connectors And Contacts

PDF

English

Product Specification

Circular DIN Connector

PDF

English

Qualification Test Report

AMP Circular Din Connector

TIF

English

AMP Circular Din Connector

PDF

English

Agency Approvals

Agency Approval Document

CIRCULAR DIN REPORT

PDF

English

CSA Certificate

CIRCULAR DIN SERIES CONNECTOR REPORT

PDF

English

FEATURES



Please review product documents or [contact us](#) for the latest agency approval information.

Please Note: Use the Product Drawing for all design activity.

Product Type Features

Connector Style Receptacle
Connector System Wire-to-Board, Wire-to-Panel
PCB Mounting Orientation Right Angle
Sealable No
Connector & Contact Terminates To Printed Circuit Board
Product Type Connector
Wire/Cable Type Discrete Wire
ESD Protection Without
Strain Relief With
Shielded Yes
Shape Circular
Connector Type Header
Insulated No

Configuration Features

Number of Positions 5
Selectively Loaded Yes
Tail Orientation Staggered

Electrical Characteristics

Hot Pluggable No
Operating Voltage (VAC) 250

Body Features

Shield Underplate Thickness 1.27 μm [50 μin]
Shield Material Brass
Shield Plating Thickness 2.54 μm [100 μin]
Shield Underplate Material Nickel
Shield Plating Material Tin/Nickel

Contact Features

Reverse Gender No
Contact Current Rating (Max) (A) 7.5
Contact Termination Area Plating Thickness 2.54 μm [100 μin]
Contact Mating Area Plating Material Tin over Nickel
Contact Mating Area Plating Thickness 2.54 μm [100 μin]
Contact Transmits (Typical) Power, Signal (Data), Signal (Data)/Power
Contact Type Socket
Contact Base Material Brass
Contact Termination Area Plating Material Tin
Contact Design Tuning Fork

Mechanical Attachment

Panel Mount Retention Type Self-Tapping Screw
Panel Mount Retention With
PCB Mount Alignment With
PCB Mount Alignment Type Solder Tail Layout
Mating Alignment With
Mating Alignment Type Keyed
PCB Mount Retention With
PCB Mount Retention Type Kinked Legs
PCB Mounting Style Through Hole - Solder
Connector Mounting Type Panel
Mating Retention Without

Housing Features

Housing Material Nylon
Housing Color Black

Dimensions

PCB Thickness (Recommended) (mm) 2.36
Height 20.83 mm [.82 in]
Length 21.84 mm [.86 in]
Tail Length 3.56 mm [.14 in]
Width 15.49 mm [.61 in]

Usage Conditions

Operating Temperature Range -55 – 105 °C [-67 – 221 °F]

Industry Standards

UL Flammability Rating UL 94V-0
UL File Number E28476
UL Rating Recognized
Agency/Standard CSA, UL
VDE Tested No
CSA File Number LR 3507

Packaging Features

Packaging Quantity 100
Packaging Method Tube

Other

Comment For applications requiring a 3-position connector, use a 5-position connector (contact positions 4 and 5 not used).

PRODUCT COMPLIANCE



Statement of Compliance

Statement of Compliance
PDF