
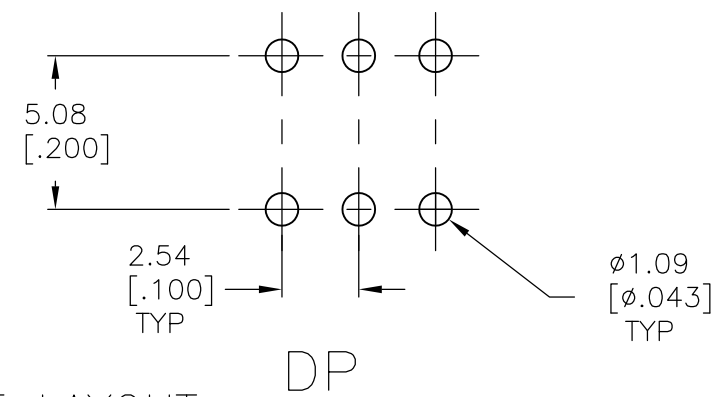
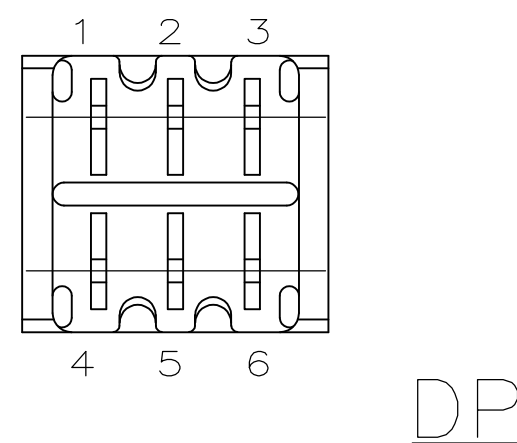
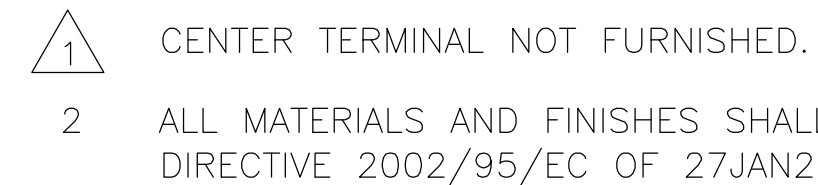






RECOMMENDED HOLE LAYOUT
LAYOUT TOLERANCES $\pm 0.05[.002]$

P/N	Alco P/N	Actuator Flush/ Extended	Position	Type			
1571982-1	TSS11DGPC04	Extended	2	SPDT	1,2	None	2,3
1571982-2	TSS11DG1PC04	Flush	2	SPDT	1,2	None	2,3
1571982-3	TSS11EG1PC04	Flush	3	SPDT	1,2	Off	2,3
1571982-4	TSS11EGPC04	Extended	3	SPDT	1,2	Off	2,3
1571982-5	TSS21KGPC04	Extended	2	DPDT	1-3, 4-6	None	Off
1571982-6	TSS21NG1PC04	Flush	2	DPDT	1-2, 4-5	None	2-3, 5-6
1571982-7	TSS21NGPC04	Extended	2	DPDT	1-2, 4-5	None	2-3, 5-6
1571982-8	TSS21PG1PC04	Flush	3	DPDT	1-2, 4-5	Off	2-3, 5-6
1571982-9	TSS21PGPC04	Extended	3	DPDT	1-2, 4-5	Off	2-3, 5-6

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M.BINNER	28FEB2006	 TE Connectivity					
		CHK M.SARVER	—						
DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD M.SARVER	—	NAME	SLIDE SWITCH TSS11 AND TSS21 SERIES				
	0 PLC ± — 1 PLC ± — 2 PLC ± 0.25[.010] 3 PLC ± — 4 PLC ± — ANGLES ± —	PRODUCT SPEC —	—	SIZE	GAGE CODE	DRAWING NO	RESTRICTED TO		
MATERIAL	FINISH	WEIGHT	—	A2	00779	C=1571982	—		
CUSTOMER DRAWING				SCALE	1:1	SHEET	1 OF 1	REV	B1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[TSS11DGPC04](#)