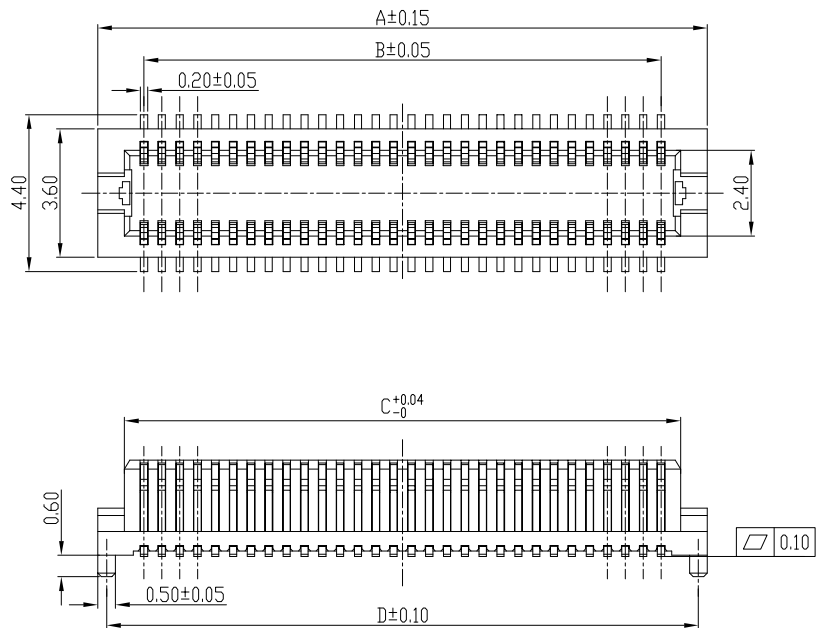


Specifications:
规格:
Voltage rating:150V AC/DC
额定电压: 150V AC/DC
Current rating:0.5A AC/DC
额定电流: 0.5A AC/DC
Withstanding voltage:150V AC/minute
耐受电压: 150V AC/分钟
Temperature range:-40℃-+85℃
温度范围: -40℃-+85℃
Insulation resistance:100MΩ min
绝缘电阻: 100MΩ Min
Contact resistance:50mΩ Max
接触电阻: 50mΩ Max


X0502 W V S - XX E S - LP SN
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- 1.Series No
- 2.Category:W-Male
- 3.Welding Board Angle:V-Stright 180°
- 4.Welding Way:S-SMT
- 5.Row No.Pin No:XX-10~80P
- 6.Height: E:3.5mm
- 7.Special No:S-With positioning column
- 8.Material:LP-LCP UL94V-0
- 9.Plating:SN-Tin Plated

Poles	Dimensions(mm)				Poles	Dimensions(mm)			
	A	B	C	D		A	B	C	D
10	4.60	2.00	3.10	4.10	32	10.10	7.50	8.60	9.60
12	5.10	2.50	3.60	4.60	36	11.10	8.50	9.60	10.60
14	5.60	3.00	4.10	5.10	40	12.10	9.50	10.60	11.60
20	7.10	4.50	5.60	6.60	50	14.60	12.00	13.10	14.60
22	7.60	5.00	6.10	7.10	60	17.10	14.50	15.60	16.60
24	8.10	5.50	6.60	7.60	80	22.10	19.50	20.60	21.60
30	9.60	7.00	8.10	9.10	/				

X0502WVS-XXES-LPSN	LCP	Copper Alloy	X0502F	3.5mm
PART NO	Material	Material(Pin)	Suitable XKB Female	Mating height

RECOMMENDED PCB LAYOUT(TOP VIEW)

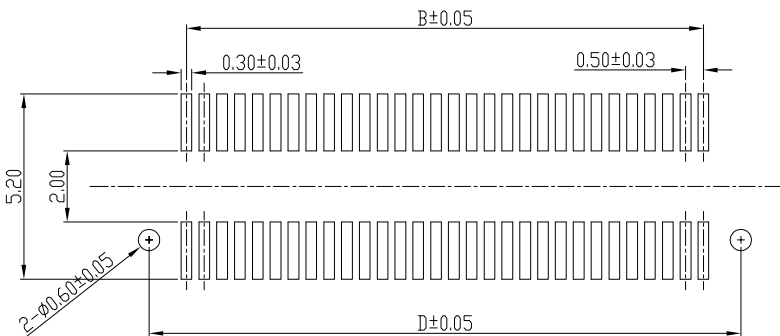

XKB

XKB INDUSTRIAL PRECISION CO.,LIMITED

					ANGLAR	±5°
Δ X					L≤ 4	±0.2
Δ X					4<L≤ 16	±0.3
Δ X					16<L≤ 63	±0.4
MARK	DESCRIPTION	DATE	REVISED	APPROVED	L> 63	±0.5
REVISIONS					UNSPECIFIED TOLERANCES	
www.helloxkb.com www.helloxkb.cn www.xk-dg.cn						

DSND		SCALE: N/A	MODEL TYPE: 0.5mm BTB Connector		
DWN		VIEW: 	PART NO.: X0502WVS-XXES-LPSN		
CHKD		UNIT: mm/in	DWG NO.: X-X0502WVS-XXES-LPSN		
APPD		SIZE: A4			
PRECISION CO.,LIMITED			WEIGHT	SHEET 1/1	REVISION A0