

MATERIALS AND FINISHES:

SMA JACK STR CONNECTOR:

BODY, CONTACT, CRIMP TUBE: BRASS
PLATED GOLD

JAM NUT: BRASS
PLATED GOLD

LOCKWASHER: PHOSPHOR BRONZE
PLATED GOLD

CONNECTOR:

MHF® I LK

MATED HEIGHT: 2.90MM MAX




CABLE: 1.32MM CABLE BLACK

NOTES:

PACKAGING BY PLASTIC BAG

PERFORMANCE REQUIRMENTS:

1. FREQUENCY: DC~ 6GHz
2. IMPEDANCE: 50 OHMS
3. TEST 100% CONTINUITY
4. TEST 100% HI-POT: AC 350 V@0.5mA

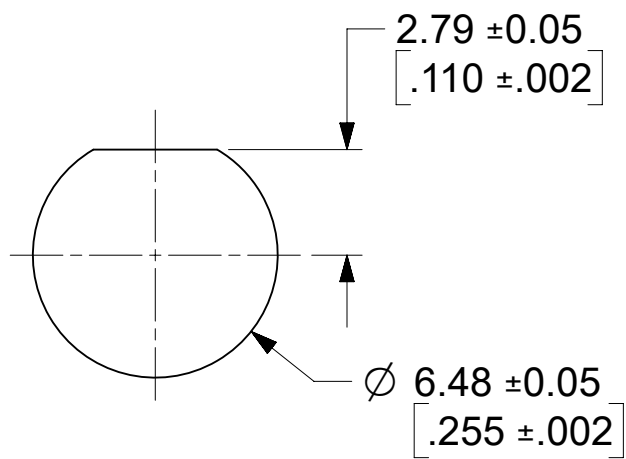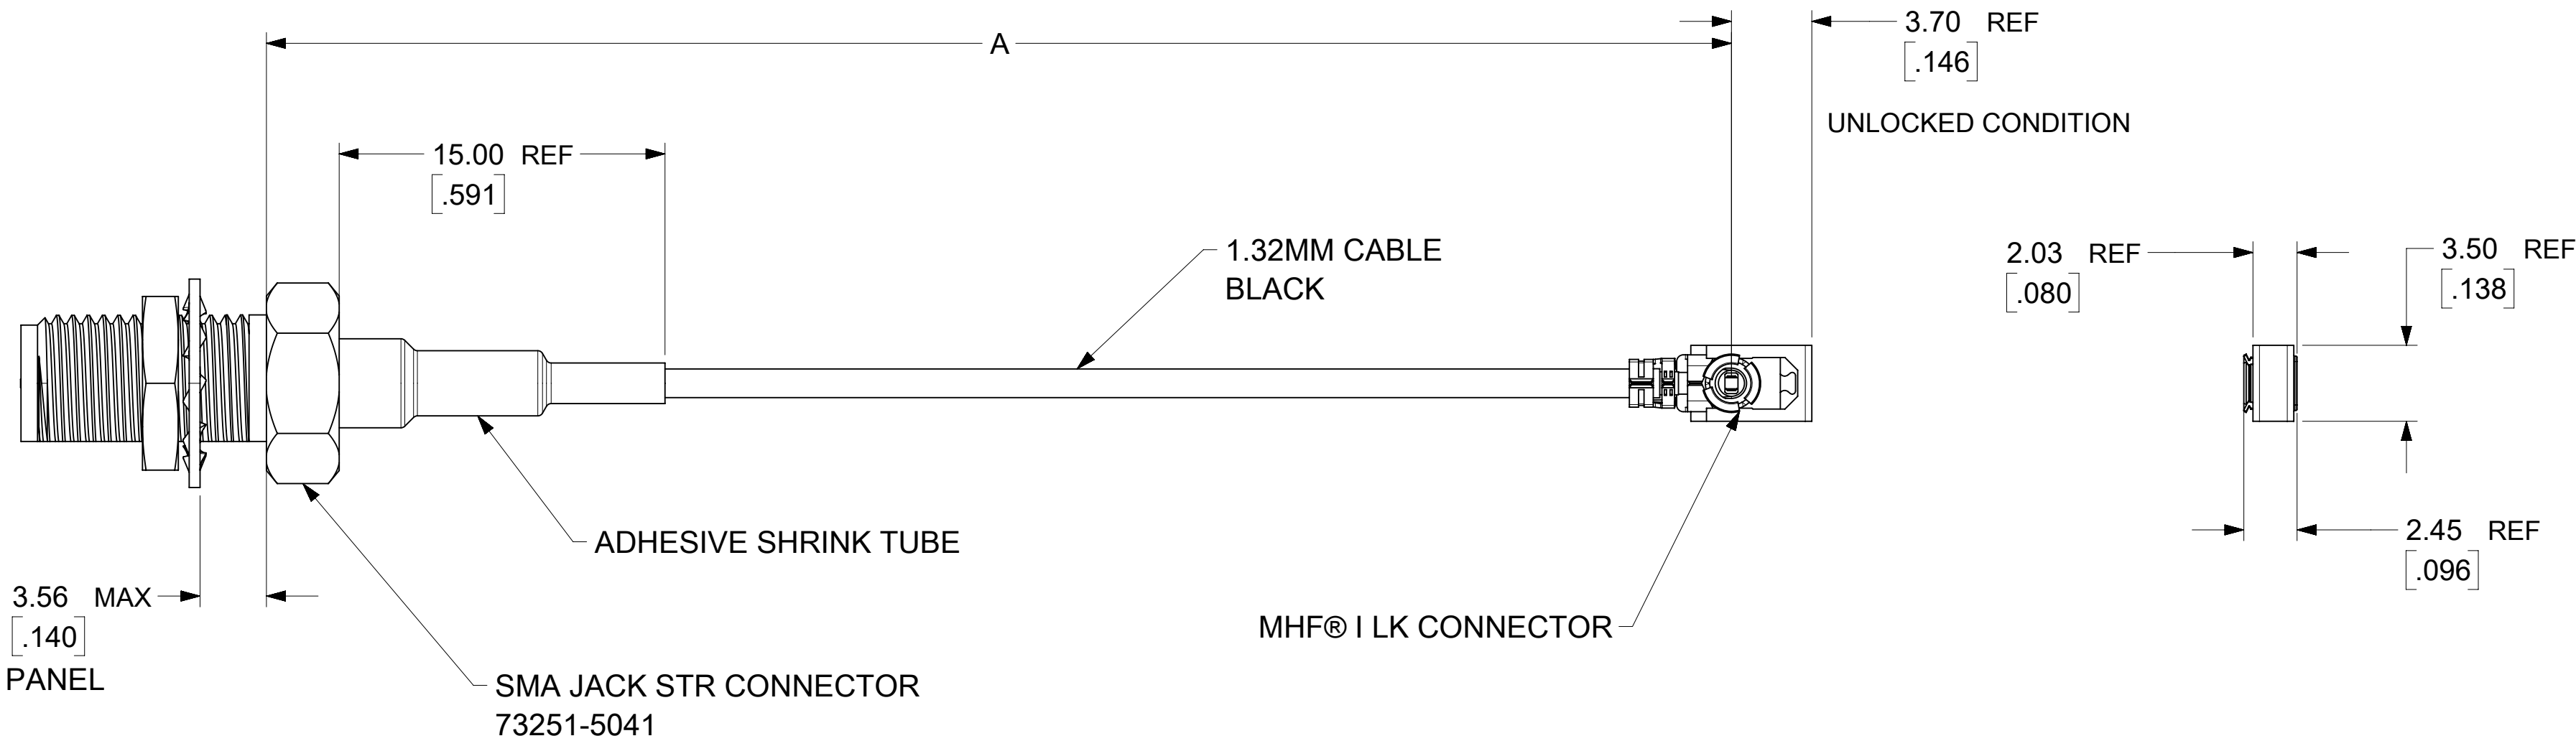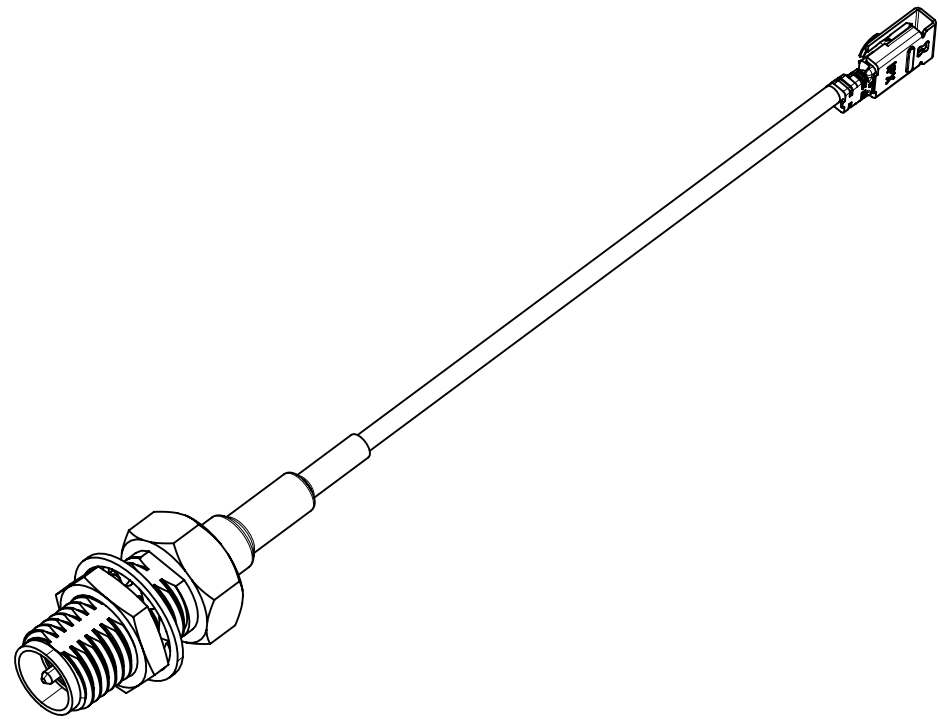

PANEL CUT-OUT
MAX PANEL THICKNESS
3.30MM (1.30)

73230-6215	2.000±.118	50.80±3.00
73230-6214	4.000±.197	101.60±5.00
73230-6213	6.000±.197	152.40±5.00
73230-6212	8.000±.197	203.20±5.00
73230-6211	10.000±.197	254.00±5.00
73230-6210	12.146±.236	308.50±6.00
PART No.	IN	MM
	A	

DOCUMENT STATUS	P1	RELEASE DATE	2023/07/07	09:38:58
-----------------	----	--------------	------------	----------

FUNCTIONAL SYMBOLS F A = 0 E C = 0 E P = 0 DIVISIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
	DIMENSION UNITS		SCALE		CURRENT REV DESC: ADD NEW PART No: 732306211,732306212, 732306213,732306214, 732306215			molex CA, SMA JACK RP STR TO MHF® I LK WITH 1.32MM CABLE EWR#15295-D		
	mm		NTS							
	GENERAL TOLERANCES (UNLESS SPECIFIED)									
	ANGULAR TOL ± °				EC NO: 755979 DRWN: JCHEN108					