

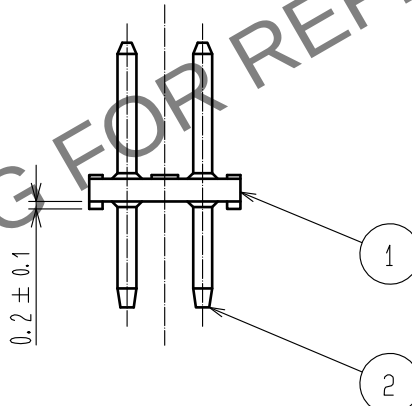
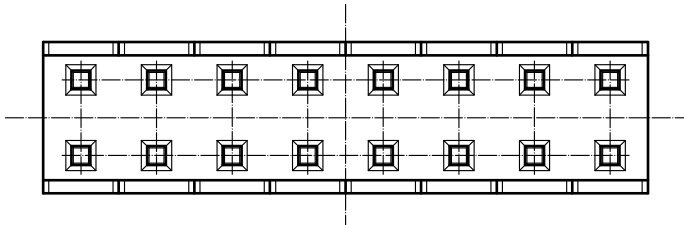
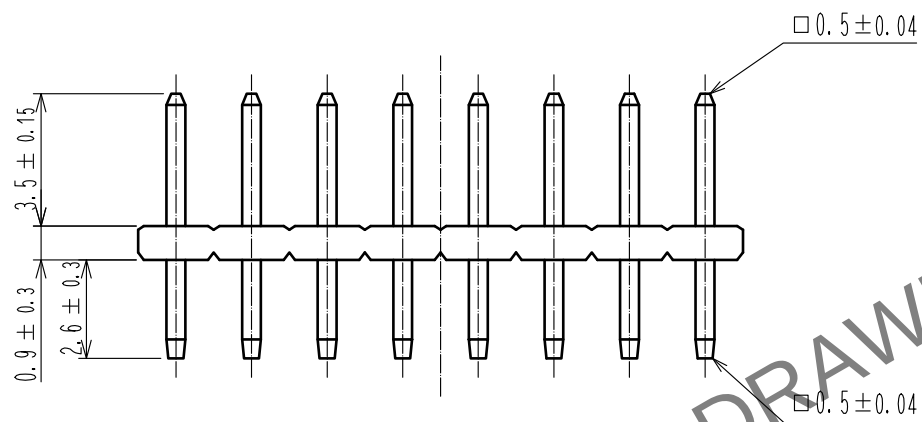


Jun.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

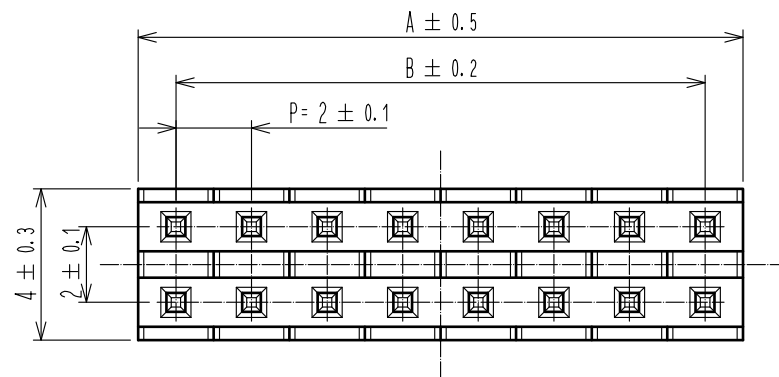

RECOMMENDED PC BOARD HOLE PATTERN  
(PCB THICKNESS : t=1.6)

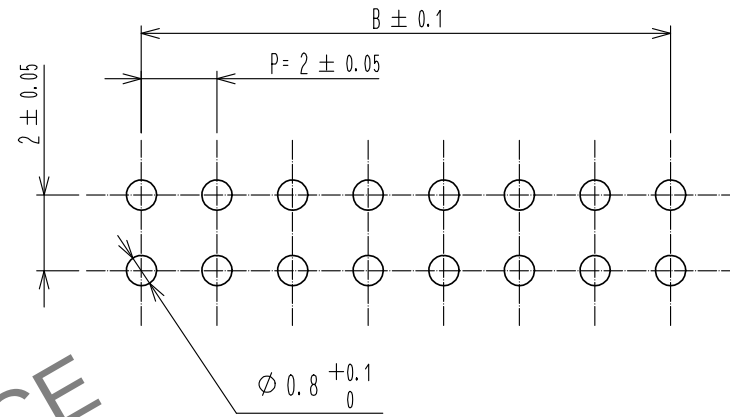

| PART NO.         | CODE NO.        | PIN | A  | B  |
|------------------|-----------------|-----|----|----|
| A3C- 2P-2DSA(30) | CL621-0601-0-30 | 2   | 2  | -  |
| A3C- 4P-2DSA(30) | CL621-0602-3-30 | 4   | 4  | 2  |
| A3C- 6P-2DSA(30) | CL621-0603-6-30 | 6   | 6  | 4  |
| A3C- 8P-2DSA(30) | CL621-0604-9-30 | 8   | 8  | 6  |
| A3C-10P-2DSA(30) | CL621-0605-1-30 | 10  | 10 | 8  |
| A3C-12P-2DSA(30) | CL621-0606-4-30 | 12  | 12 | 10 |
| A3C-14P-2DSA(30) | CL621-0607-7-30 | 14  | 14 | 12 |
| A3C-16P-2DSA(30) | CL621-0608-0-30 | 16  | 16 | 14 |
| A3C-18P-2DSA(30) | CL621-0609-2-30 | 18  | 18 | 16 |
| A3C-20P-2DSA(30) | CL621-0610-1-30 | 20  | 20 | 18 |
| A3C-24P-2DSA(30) | CL621-0612-7-30 | 24  | 24 | 22 |
| A3C-26P-2DSA(30) | CL621-0613-0-30 | 26  | 26 | 24 |
| A3C-28P-2DSA(30) | CL621-0614-2-30 | 28  | 28 | 26 |
| A3C-32P-2DSA(30) | CL621-0615-5-30 | 32  | 32 | 30 |
| A3C-44P-2DSA(30) | CL621-0622-0-30 | 44  | 44 | 42 |
| A3C-48P-2DSA(30) | CL621-0625-9-30 | 48  | 48 | 46 |
| A3C-50P-2DSA(30) | CL621-0628-7-30 | 50  | 50 | 48 |

|             |  |                                 |                         |           |                          |                   |                                  |
|-------------|--|---------------------------------|-------------------------|-----------|--------------------------|-------------------|----------------------------------|
| 1           |  | POLYAMIDE                       | BLACK                   | UL94V-0   | 2                        | BRASS             | CONTACT AREA : GOLD 0.2 $\mu$ m  |
| NO.         |  | MATERIAL                        | FINISH . REMARKS        |           | NO.                      |                   | DIP AREA : GOLD FLASH            |
|             |  |                                 |                         |           |                          |                   | UNDER PLATING : NICKEL 2 $\mu$ m |
| UNITS<br>mm |  |                                 | SCALE<br>5 : 1          | COUNT<br> | DESCRIPTION OF REVISIONS |                   | DESIGNED                         |
|             |  |                                 |                         |           |                          |                   | CHECKED                          |
|             |  |                                 |                         |           |                          |                   | DATE                             |
|             |  | HIROSE<br>ELECTRIC<br>CO., LTD. | APPROVED : NH. NAKATA   |           | 17. 04. 10               | DRAWING<br>NO.    |                                  |
|             |  |                                 | CHECKED : HT. YAMAGUCHI |           | 17. 04. 10               | PART<br>NO.       |                                  |
|             |  |                                 | DESIGNED : HR. NAGAYASU |           | 17. 04. 10               | CODE<br>NO.       |                                  |
|             |  |                                 | DRAWN : HR. NAGAYASU    |           | 17. 04. 10               | CL621             |                                  |
|             |  |                                 |                         |           |                          | EDC-375930-00-00  |                                  |
|             |  |                                 |                         |           |                          | A3C- * P-2DSA(30) |                                  |
|             |  |                                 |                         |           |                          | 1/1               |                                  |