

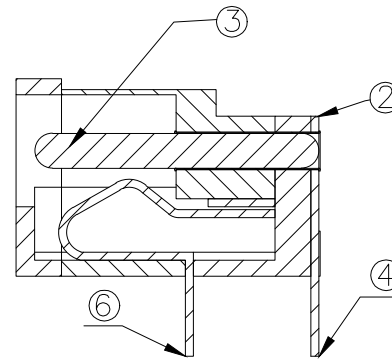
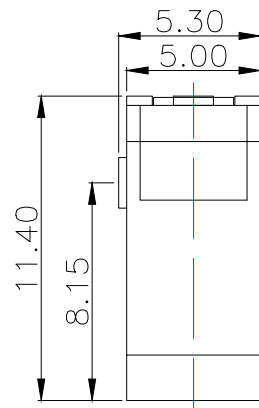
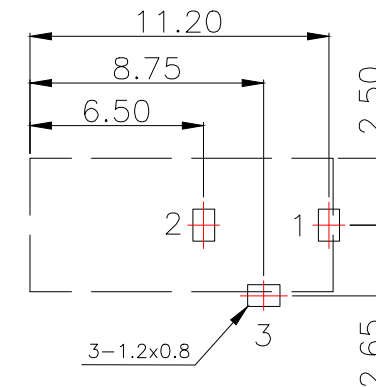
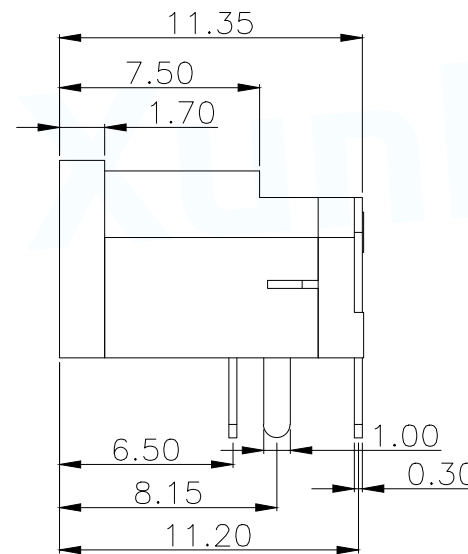


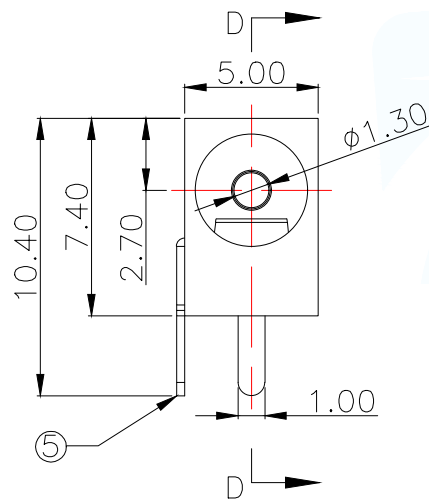


D-D

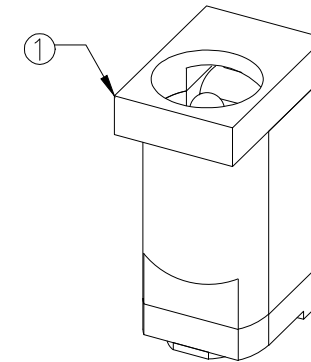

PCB.WELDING DRAWING (TOLERANCE:±0.05)

Main technical performance	
Rated electrical load	DC 12V 2A
Contact resistance	≤30mΩ
Insulation resistance	≥100MΩ DC500V
Pressure resistance	AC 500V 1min
Insertion force	3-30N
Operating temperature range	-20C°~+70C°
service life	5000cycles



SCHEMATIC

6	弹片	1	H62	镀银
5	插片	1	H62	镀银
4	平片	1	H62	镀银
3	中心针	1	H62	铜锡
2	盖板	1	PPA	黑
1	底座	1	PPA	黑
序号	名称	数量	材料	备注

MANUFACTURE DWG

 东莞市讯普电子科技有限公司
DongGuan XunPu Electronics Co.,LtdUNLESS OTHERWISE
SPECIFIED TOLERANCESTITLE:
DC SOCKET

PAR DC-002-B130

DECIMALS:	ANGLES:
X.X±0.30	X.*±5°
X.XX±0.25	X.X°±1°
X.XXX±0.15	

CUSTOMER COPY

SCALE:A UNIT:MM
SIZE:A4 SHEET:1F1 REV:A