
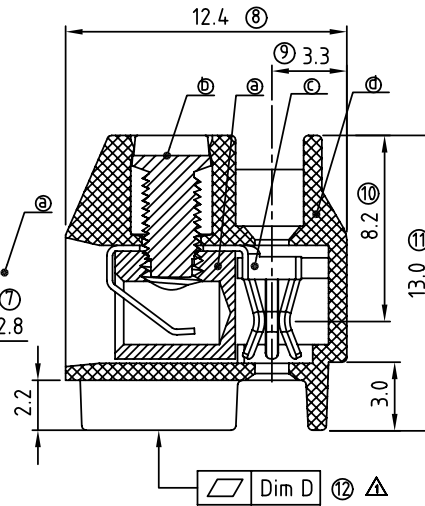
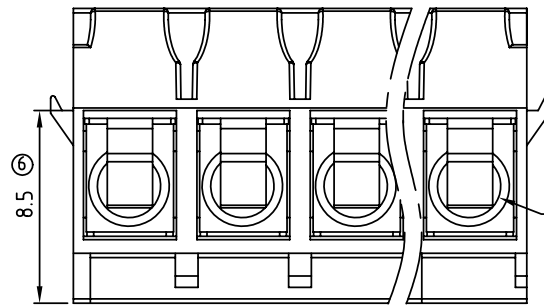
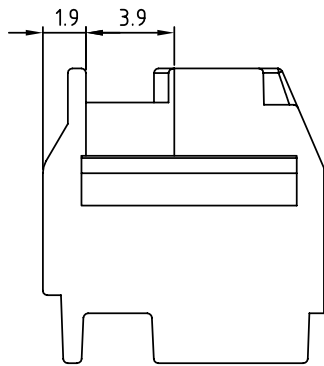


SIGN	DATE	DESCRIPTION	APPROVER
△	2009.03.31	Add the inspection dimension	Jacke
△	2010.05.30	Add cULus standard	Jacke
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

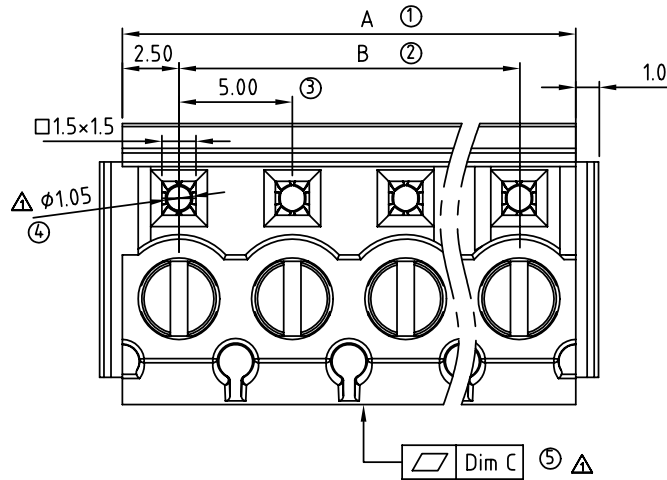

Material

- Item④ Clamp: Brass(CuZn) Ni plated
- Item⑤ Terminal screw: Steel Zinc plating "--" slot type
- Item⑥ Female contact: PhBz (CuSn) Tin plated
- Item⑦ Terminal (housing): Thermoplastic (UL94V-0)

Electrical cULus

- Voltage rating: 300V
- Current rating: 10A
- Wire range:
 - Solid wire(AWG): 14-26
 - Stranded wire(AWG): 14-26
- Torque: 3.5Lb-In
- Screw: M2.6
- Wire strip length: 5-6mm
- Withstanding Voltage: 1.6KV
- Operating temperature:-40°C to+115°C
- Safety Approval: cULus

KR xx 01 x 1 xxxx G

			RoHS Pb<40,000ppm
Poles	0	Black (RAL9005)	0000 Standard @ Logo
02 2Contacts	2	Red (RAL3001/D)	000A Standard ANY Logo
03 3Contacts	3	Orange(RAL2011/P)	Any special item by
—	4	Yellow(RAL1018/A)	customer request,
24 24Contacts	5	Green(RAL6018/T)	please contact sales
	6	Blue (RAL5015/A)	department.
	8	Grey(RAL 7035/D)	

N = Number of poles

Dim A=Nx5.0

Dim B=(N-1)x5.0

	Dim A	Dim B	Dim C	Dim D
2P	±0.05	±0.05	≤0.05	≤0.05
3-6p	±0.15	±0.15	≤0.10	≤0.10
7-12p	±0.20	±0.20	≤0.20	≤0.20
13-18p	±0.30	±0.30	≤0.20	≤0.20
19-24p	±0.40	±0.40	≤0.40	≤0.40

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	KR 5.0mm Series "--" (With hook)			
PART NO.	KRxx01x1xxxxG			DWG NO. 8KR0002
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.
		Jacke 2010.05.30	Jacke 2009.03.31	
SHEET: 01/01				UNIT: mm
				SCALE: NONE
				Tolerance
				X. ±0.50
				X.X ±0.30
				X.XX ±0.10
				X° ±1°

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Amphenol:

<u>KR0201010000G</u>	<u>KR0301010000G</u>	<u>KR0401010000G</u>	<u>KR0501010000G</u>	<u>KR0601010000G</u>	<u>KR0701010000G</u>
<u>KR0801010000G</u>	<u>KR0901010000G</u>	<u>KR1001010000G</u>	<u>KR1101010000G</u>	<u>KR1201010000G</u>	<u>KR1301010000G</u>
<u>KR1401010000G</u>	<u>KR1501010000G</u>	<u>KR1601010000G</u>	<u>KR1701010000G</u>	<u>KR1801010000G</u>	<u>KR1901010000G</u>
<u>KR2001010000G</u>	<u>KR2101010000G</u>	<u>KR2201010000G</u>	<u>KR2301010000G</u>	<u>KR2401010000G</u>	