


4-conductor through terminal block; 4 mm²; for Ex e II and Ex i applications; side and center marking; for DIN-rail 35 x 15 and 35 x 7.5; Push-in CAGE CLAMP®

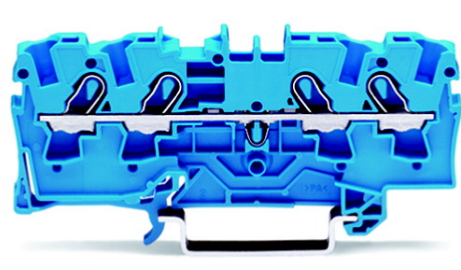

Item no.	2004-1404	GTIN / EAN	4017332071826
Content	1 piece	Order unit	piece
Order quantity	50 piece	Increase in order quantity	(50, 100, 150, 200, ...)
Customer item no.		Customs Tariff no.	85369010000
Customs duty for the country of origin	DE	Available	-
List price	On request	Net price	On request
Availability	On request		

Note: Some items may not be available from your local WAGO company.
Please note that the quantities ordered in the shopping cart are rounded up to the PU (SPU).

RoHS ☒ Compliant



Article details

Approvals

Downloads/Certificates

Accessories

Description

Remarks

Item properties

Miscellaneous

Name	Value	Unit
Rated voltage EN (Ex e II) [V]	550	V
Rated current (Ex e II) [A]	30	A
Connection technology	Push-in CAGE CLAMP®	
Actuation type	Push-in	
Connectable conductor materials	Copper	
Nominal cross section	4 mm²	
Solid conductor	0.5 ... 6 mm² / 20 ... 10 AWG	
Solid conductor, push-in termination	1 ... 6 mm² / 14 ... 10 AWG	
Fine-stranded conductor	0.5 ... 6 mm² / 20 ... 10 AWG	
Fine-stranded conductor with ferrule, push-in termination, f	0.75 mm² / 18 AWG	
Strip length	11 ... 13 mm / 0.43 ... 0.51 inch	
Total number of connection points	4	
Total number of potentials	1	
Number of levels	1	
Type of wiring	Front-entry wiring	
Width	6.2 mm / 0.244 in	
Height from upper edge of DIN-35 rail	32.9 mm / 1.295 in	
Depth	78.7 mm / 3.098 in	
Design	horizontal	
Type of mounting	Carrier rail 35 x 15	
Marking level	Center/side marking	
Color	blue	
Insulating material	Polyamide 66 (PA 66)	
Fire load [MJ]	0.181	MJ
Weight [g]	10.605	g
Packaging type	BOX	
[mm]	6.2	mm
Product Family	TOPJOB® S	
Main product function	Through term. block	
Product type	Through rail-mount term. blocks	

Upwards

Upwards