
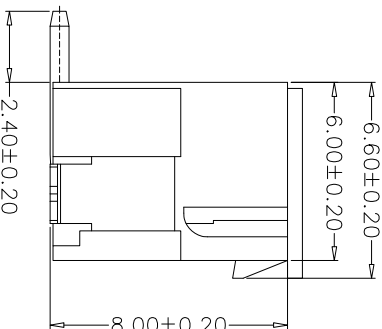
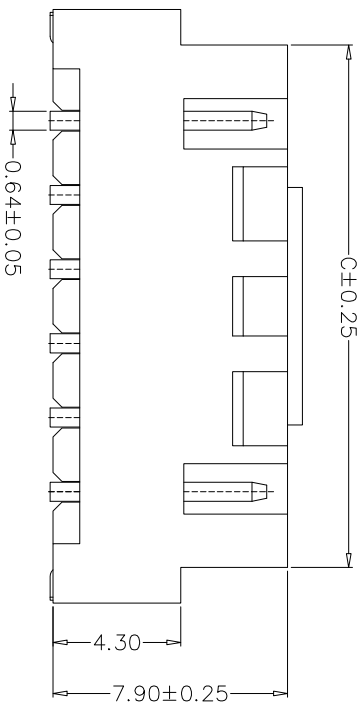
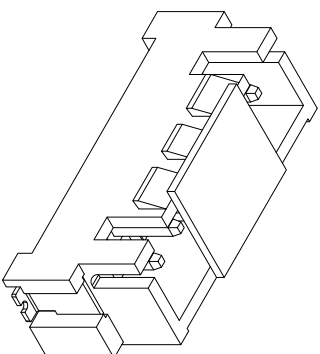
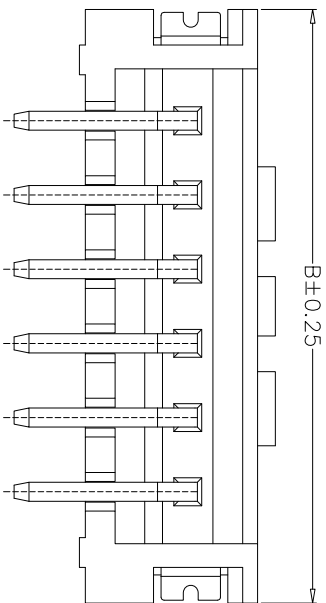


PCB LAYOUT

SPECIFICATIONS

- Current Rating: 3A AC, DC
 - Voltage Rating: 250V AC, DC
 - Temperature Range: -25°C~+85°C
 - Contact Resistance: 20mΩ Max
 - Insulation Resistance: 1000MΩ Min
 - Withstanding Voltage: 1000V AC/minute
 - Material: Wafer LCP, PA6T, UL94V-0
- PIN Brass Tin-plated
Solder tad Phosphoric bronze Tin-plated

编 号	尺寸 (mm)		
	A	B	C
A2504-02AB	2.50	10.00	7.50
A2504-03AB	5.00	12.50	10.00
A2504-04AB	7.50	15.00	12.50
A2504-05AB	10.00	17.50	15.00
A2504-06AB	12.50	20.00	17.50
A2504-07AB	15.00	22.50	20.00
A2504-08AB	17.50	25.00	22.50
A2504-09AB	20.00	27.50	25.00
A2504-10AB	22.50	30.00	27.50
A2504-11AB	25.00	32.50	30.00
A2504-12AB	27.50	35.00	32.50
A2504-20AB	47.50	55.00	52.50

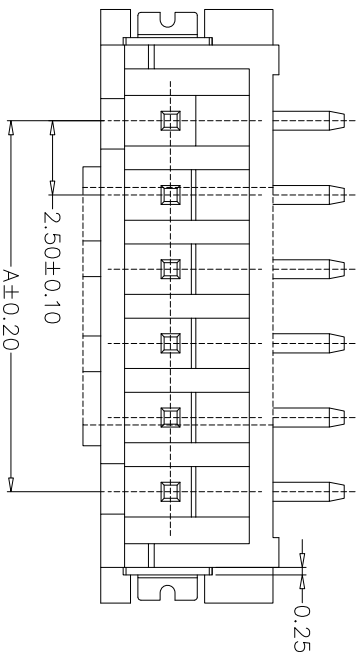

X. ±0.5	X. ±
. X ±0.30	. X. ±
. XX ±0.20	. XX. ±
. XXX ±0.005, XXX. ±	

单位 UNIT	mm
比例 SCALE	

批准: APPROVED BY	版本: A0	产品名称 Production name	HA立贴 WAFER SMT TYPE
审核: CHECKED BY	页次: 1/1	产品料号 Product No	TH-A2504-NAB
制图: DRAWN BY	日期: 2023.01.31	客户料号 Client No	

深圳市泰华电子有限公司
TaiHua Electronics Co., Ltd