


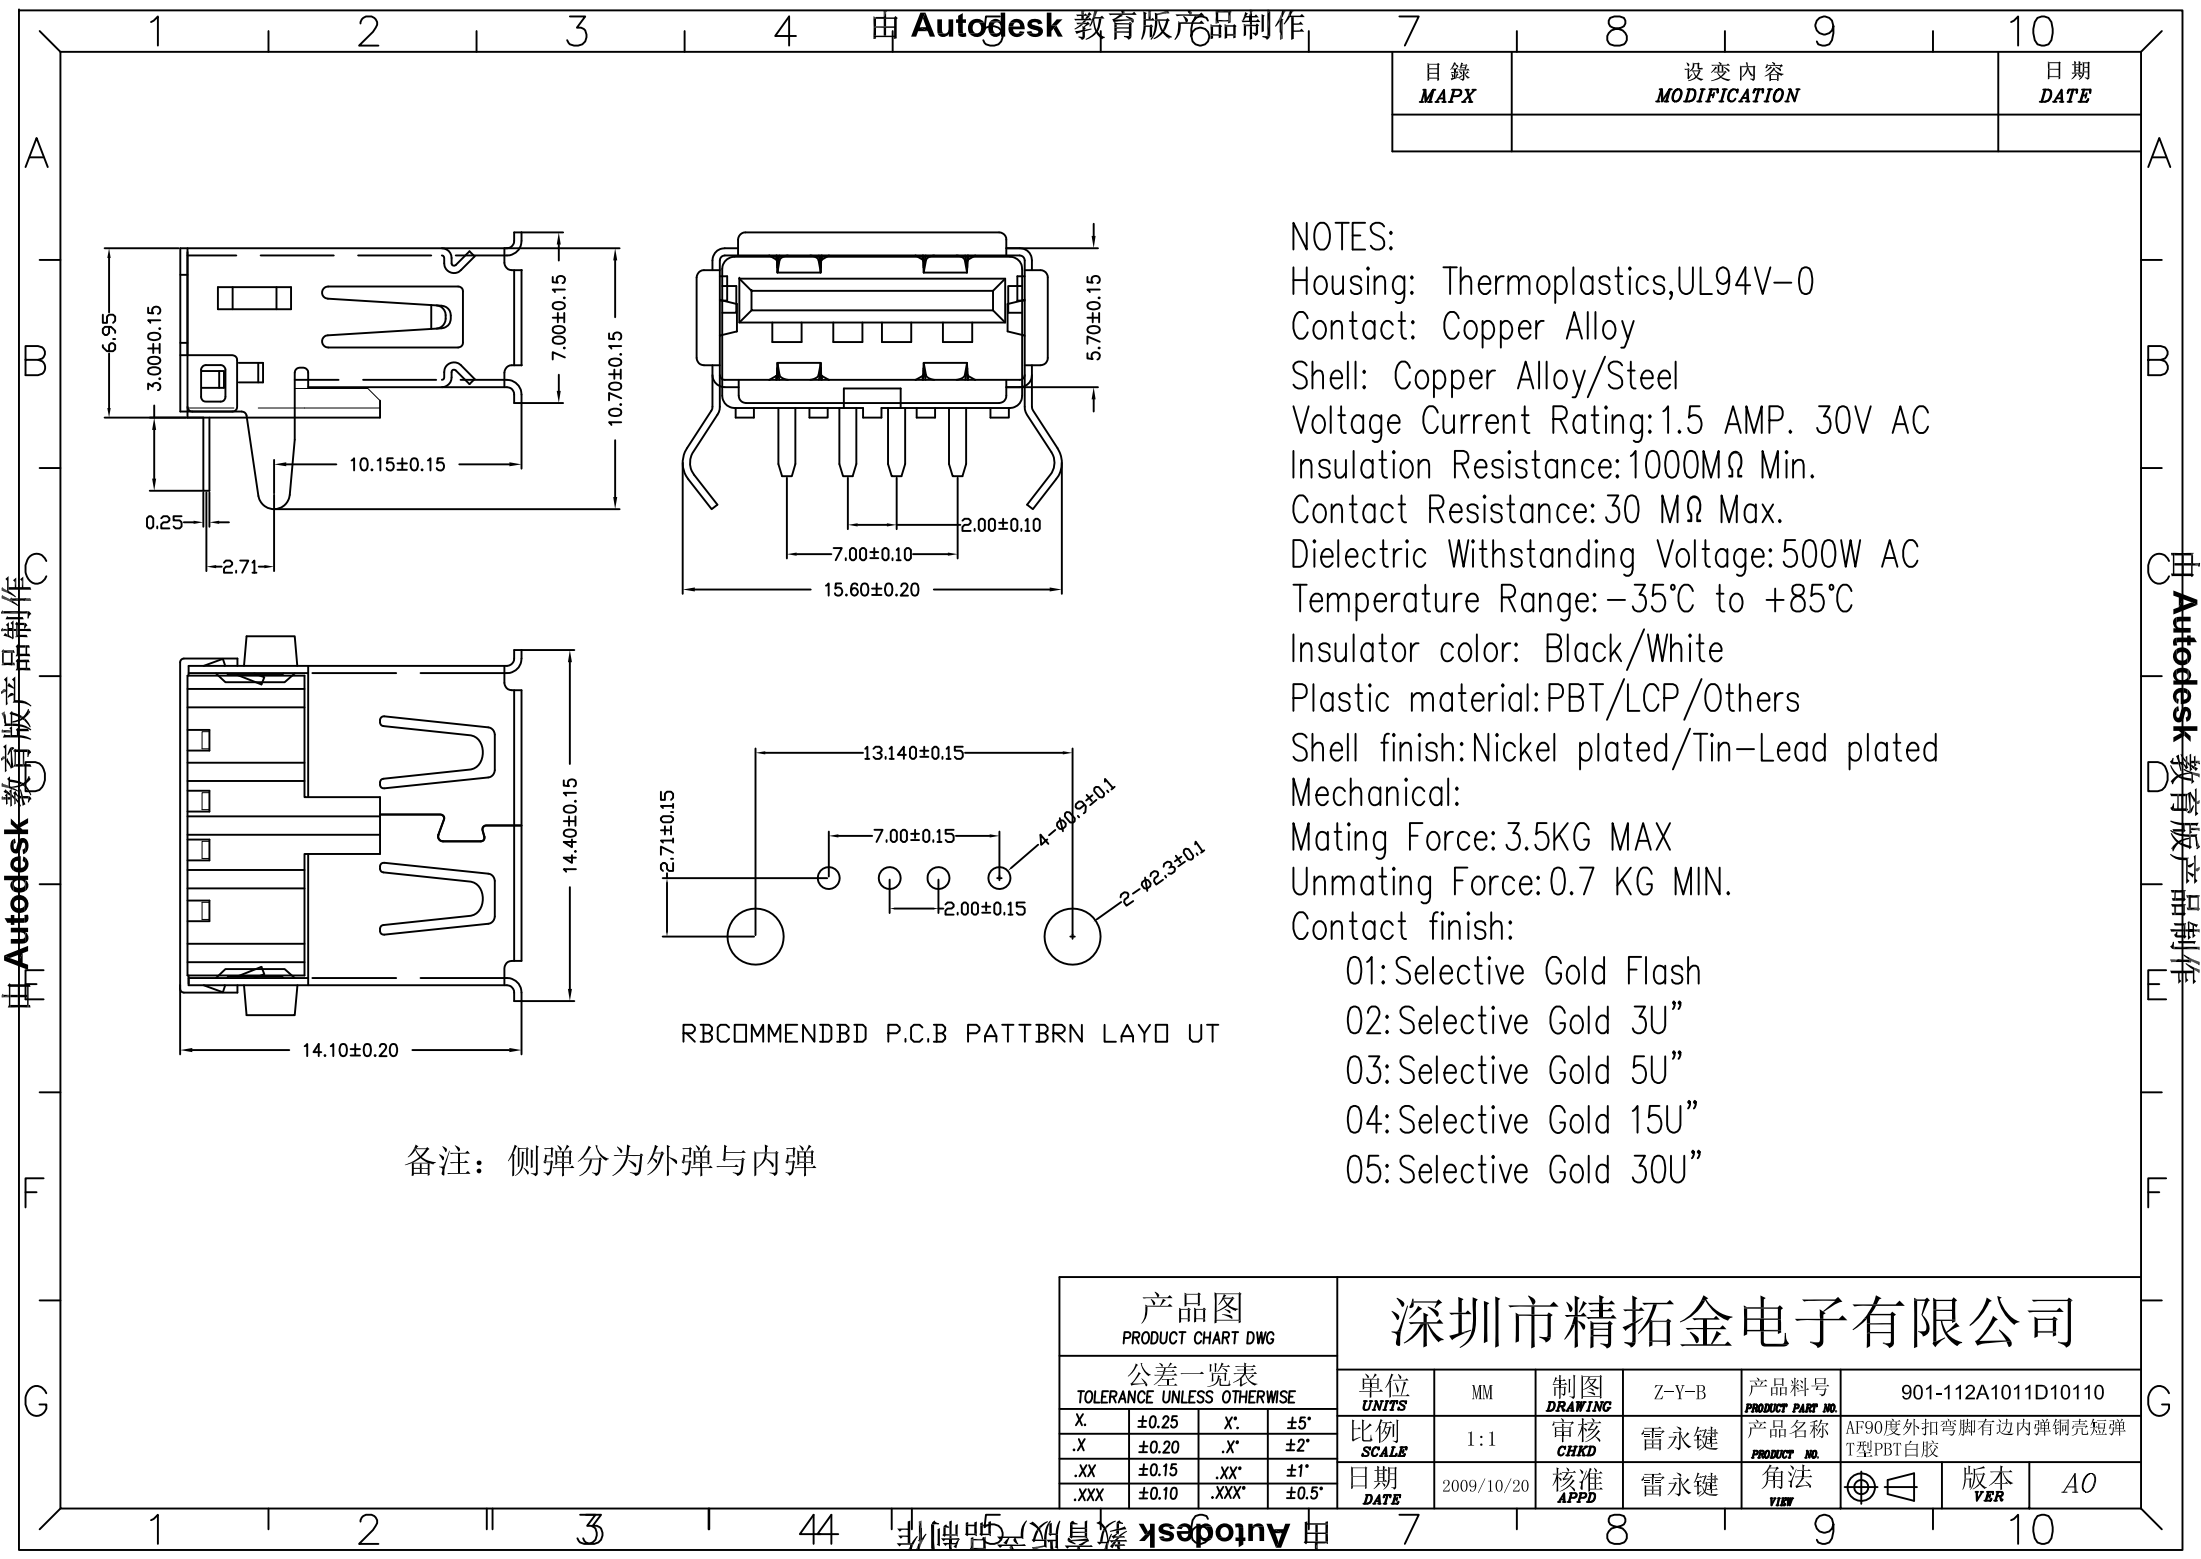

| 目錄<br>MAPX | 设 变 内 容<br>MODIFICATION | 日 期<br>DATE |
|------------|-------------------------|-------------|
|            |                         |             |

NOTES:  
Housing: Thermoplastics,UL94V-0  
Contact: Copper Alloy  
Shell: Copper Alloy/Steel  
Voltage Current Rating:1.5 AMP. 30V AC  
Insulation Resistance:1000MΩ Min.  
Contact Resistance:30 MΩ Max.  
Dielectric Withstanding Voltage:500W AC  
Temperature Range:-35℃ to +85℃  
Insulator color: Black/White  
Plastic material:PBT/LCP/Others  
Shell finish:Nickel plated/Tin-Lead plated  
Mechanical:  
Mating Force:3.5KG MAX  
Unmating Force:0.7 KG MIN.  
Contact finish:

| 产 品 图<br>PRODUCT CHART DWG          |       |       |       | 深 圳 市 精 拓 金 电 子 有 限 公 司 |            |               |       |                          |                              |
|-------------------------------------|-------|-------|-------|-------------------------|------------|---------------|-------|--------------------------|------------------------------|
| 公差一览表<br>TOLERANCE UNLESS OTHERWISE |       |       |       | 单位<br>UNITS             | MM         | 制图<br>DRAWING | Z-Y-B | 产品料号<br>PRODUCT PART NO. | 901-112A1011D10110           |
| X.                                  | ±0.25 | X'.   | ±5°   | 比例<br>SCALE             | 1:1        | 审核<br>CHKD    | 雷永键   | 产品名称<br>PRODUCT NO.      | AF90度外扣弯脚有边内弹铜壳短弹<br>T型PBT白胶 |
| .X                                  | ±0.20 | .X'   | ±2°   | 日期<br>DATE              | 2009/10/20 | 核准<br>APPD    | 雷永键   | 角法<br>VIEW               |                              |
| .XX                                 | ±0.15 | .XX'  | ±1°   |                         |            |               |       | 版本<br>VER                | A0                           |
| .XXX                                | ±0.10 | .XXX' | ±0.5° |                         |            |               |       |                          |                              |