



PANDUIT PART NUMBER	STUD SIZE	DIMENSIONS in.				
		A ±.03	W ±.010	C MIN	M ±.03	H ±.01
PV14-6SLFB-3K	#6	.75 (19.05)	.25 (6.35)	.19 (4.83)	.64 (16.26)	.14 (3.56)
PV14-8SLFB-3K	#8	.80 (20.32)	.29 (7.37)	.23 (5.84)	.68 (17.27)	.16 (4.06)
PV14-10SLFB-3K	#10	.81 (20.57)	.33 (8.38)	.23 (5.84)	.68 (17.27)	.19 (4.83)
PV14-14SLFB-3K	1/4	.90 (22.86)	.44 (11.18)	.29 (7.37)	.74 (18.80)	.25 (6.35)

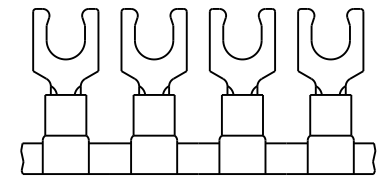

1. UL LISTED AND CSA CERTIFIED FOR :
A. 600 V MAX. VOLTAGE RATING
B. 221°F (105°C) MAX. TEMP. RATING
C. #16-14 AWG (1.5-2.5 mm²) STRANDED, COPPER WIRE ONLY
 2. PACKAGE QTY. : 3K = 3000 PCS.
CONTINUOUS MOLDED CARRIER STRIP
 3. MATERIAL :
A. STAMPING - .03" THK COPPER, TIN PLATED
B. HOUSING - BLUE VINYL
 4. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS
 5. INSTALLATION TOOLS :
A. PRESSES - CP-851, CP-860, CP-861
B. APPLICATOR - CA-800
C. DIE INSERTS - CD-800-2
 6. WIRE STRIP LENGTH 1/4" ^{+1/32} ₋₀ (6.4 ^{+0.8} ₋₀)
- 
LISTED
587H
F52164



										PANDUIT CORP TINLEY PARK, ILLINOIS								
										TERMO 2PC CONTINUOUSLY MOLDED VINYL INSULATED, #16-14 BARREL, SHORT LOCKING FORKS								
05	10/07	SRB	SRB	Removed part# PV14-5SLFB-3K Part obsolete							DRAWN BY	FES	CHK'D	FES	SCALE	NONE	DRAWING NO.	A41074
REV	DATE	BY	CHK	DESCRIPTION		ECN	QA	CUST	PM	APP								