
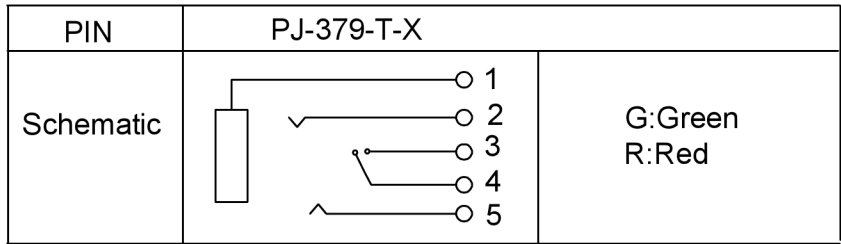


Copper bush



Temperature : -20~70 C
温度: -20~70 C
Rated Load: DC 30V 0.3A
额定负载: DC 30V 0.3A
Contact Resistance : <0.03
接触电阻 : <0.03
Insulation Resistance: >100M
绝缘电阻: >100M
Withstand Voltage : AC500V(50Hz)/min
耐受电压 : AC500V(50Hz)/分钟
Actuating Force : 8~30N
驱动力: 8~30N
Life : 3000N
寿命: 3000N

	MATERIAL	PLATING
termina 1	Phosphor Bronze	ag
termina 2	Phosphor Bronze	ag
termina 3	Phosphor Bronze	ag
termina 4	Phosphor Bronze	ag
terminal 5	Phosphor Bronze	ag
copper bush	Brass	tin
base	PA66	
cover	PA66	
Shell	SUS	

广东星坤科技股份有限公司

文件工程草

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
ANGULAR					±5°
L ≤ 4					±0.2
4 < L ≤ 16					±0.3
16 < L ≤ 63					±0.4
L > 63					±0.5



XKB INDUSTRIAL PRECISION CO.,LIMITED

DSND		SCALE: N/A	MODEL TYPE: 3.5 PHONE JACK		
DWN		VIEW: 	PART NO.: PJ-379-X		
CHKD		UNIT: mm/in	DWG NO.:		
APPD		SIZE: A4			
PRECISION CO. LIMITED			WEIGHT	SHEET	REVISIO