


Actuator

704.294.01

Distribution by
DigiKey

DigiKey

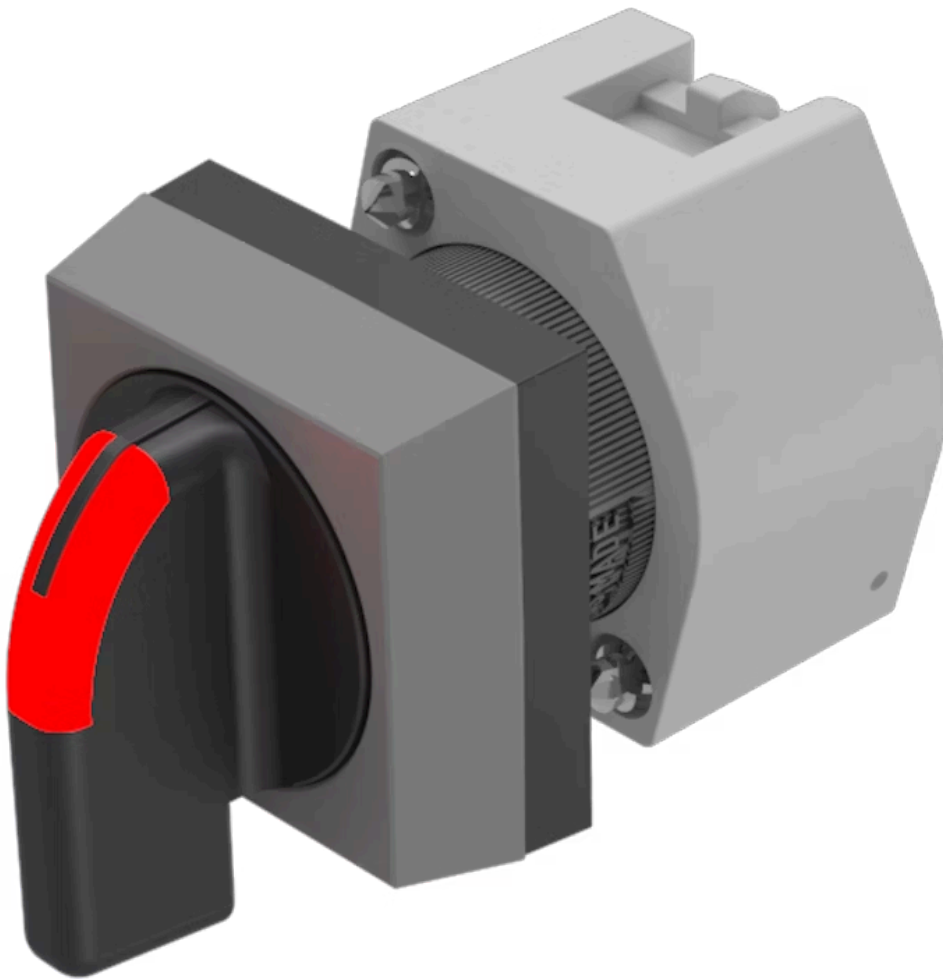

<https://digikey.eao.com/p/704.294.01>

Your product:



704.294.01 Actuator

FRONT

Front dimension:	30 mm x 30 mm
Front bezel material:	Plastic
Front bezel colour:	Grey

MOUNTING

Design:	raised
---------	--------

OPERATING-/INDICATION PART

Lever shape:	long
Lever colour:	Black
Lever material:	plastic

ELECTRICAL CHARACTERISTICS

Standards:	The switches comply with the "Standards for low-voltage switching devices" DIN EN 60947-1
------------	---

MECHANICAL CHARACTERISTIC

Mechanical lifetime:	≤2.5 Mio. cycles of operation
Switching action:	Momentary - Rest - Momentary
Switching angle:	42° left / 42° right
Weight:	0.034 kg
Switching positions:	3 positions

AMBIENT CONDITION

IP Protection:	IP65 front side
Operating temperature:	– 40 °C ... + 55 °C
Storage temperature:	– 40 °C ... + 85 °C


OTHER

Short Description: Actuator, 30 mm x 30 mm, optional illuminative, Black, long, Grey, Plastic, Momentary - Rest - Momentary

Hints: Max. 3 switching elements can be clipped on


max. number of switching elements: 3

Dimension drawings:

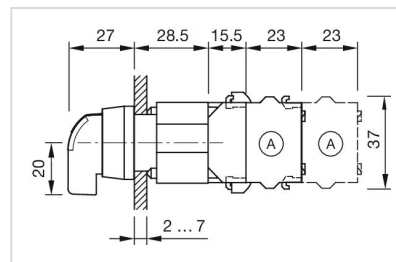


A = Screw terminal


Wiring diagrams:

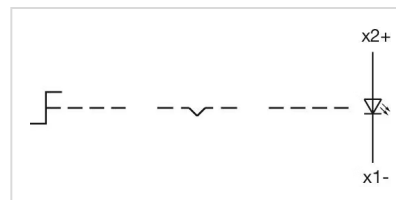

Switching positions:

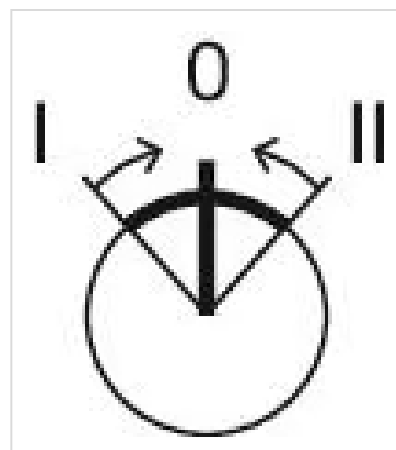

Mounting cut-outs:

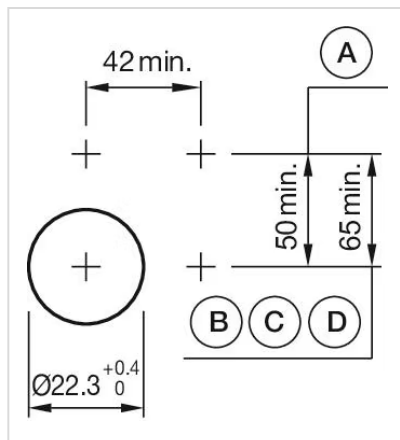

- A = Screw terminal
- B = Push-in terminal (PIT)
- C = Plug-in terminal 6.3 mm x 0.8 mm
- D = Double plug-in terminal 6.3 mm x 0.8 mm