

Isolierkörpermaterial

Nylon, UL94V-0

Kontaktmaterial

Phosphorbronze

Kontaktoberfläche

Ni, 6µ" Au / Sn

Kontaktwiderstand

60mΩ max

Isolationswiderstand

1000MΩ min

Strombelastbarkeit

1.5A

Betriebstemperatur

-40°C - +85°C

Betriebsspannung

125V AC

Prüfspannung

1000V AC

Verpackung

Blisterverpackung

Insulator material

Nylon, UL94V-0

Contact material

Phosphor bronze

Plating

Ni, 6µ" Au / Sn

Contact resistance

60mΩ max

Insulation resistance

1000MΩ min

Current rating

1.5A

Operating temperature

-40°C - +85°C

Operating voltage


125V DC

Test voltage




1000V AC

Packing

Tray packing

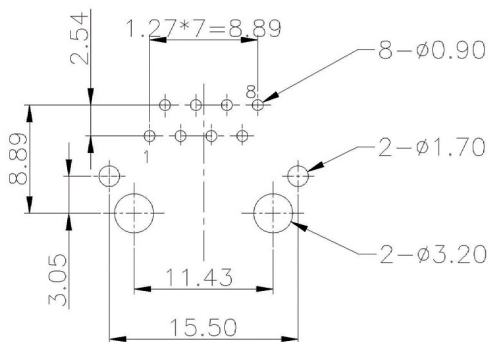

PC Board Layout Component Side Shown

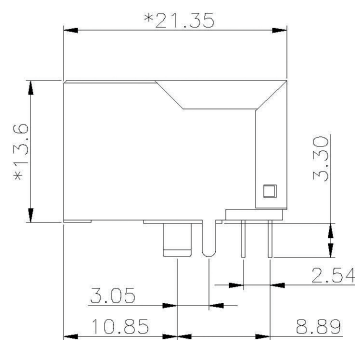

Bestellcode / Ordercode

88 - 8 polig (RJ45)

88 - 8 contacts (RJ45)

AMJ - 1 88 - 0010100 - CAT5