




1. RECOMMENDED SPARE PARTS.
2. GREASE RAM, CAM, CAM FOLLOWER AND FEED ROD LIGHTLY.
3. LUBRICATE DAILY PER THE APPLICATOR INSTRUCTION SHEET SUPPLIED WITH THE APPLICATOR.
4. CRIMP HEIGHT AND TENSILE VALUES TO MOLEX APPLICATION SPECIFICATION V-36 990. (CRIMP WIDTHS AS CALCULATED BY TYCO ELECTRONICS LTD.).

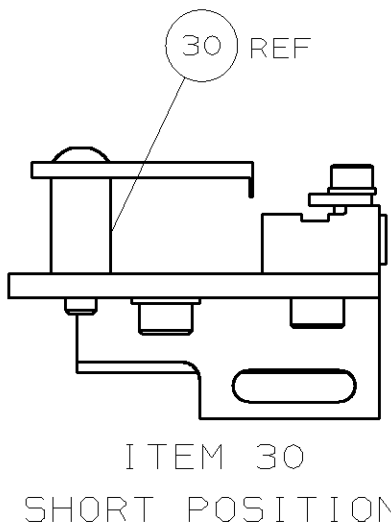

QTY REQD PER ASSY				PARTS LIST			
		DIMENSIONS: mm [INCHES]		MTRL		FIN	
		DO NOT SCALE PRINT.		-		-	
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		-		-	
BH	AUG04	1	PLC DEC +0.5 [0.02 IN]	DR	04JUL01	AMP	04JUL01
TE	11-03	2	PLC DEC +	L:LOFHOUSE		F:BACKHURST	
TE	3-02	3	PLC DEC +	CHK	-	REL	24AUG01
MC	AUG01		ANGLES ±	NAME		SIDE FEED HD-1 APPLICATOR	
LJL	AUG01		SURF TEXTURE: ✓	SCALE		MACHINE REF	
APP	DATE		REMOVE BURRS, BREAK SHARP EDGES	D	DWG NO	1420222	SHEET 1 of 1
			RO.38 MAX				REV E
		CAGE CODE	00779	CUSTOMER AND ASSEMBLY DRAWING			
		RESTRICTED TO					