

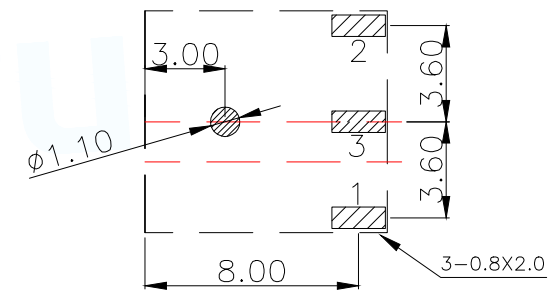
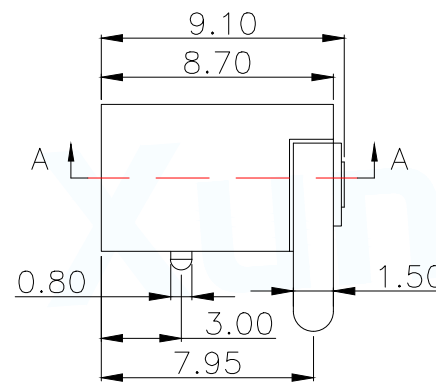
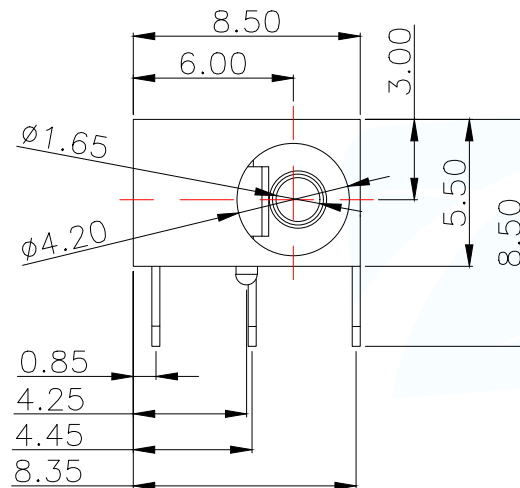



A-A

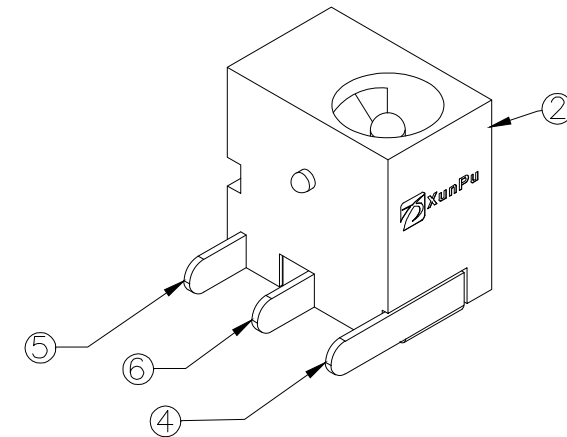

PCB.WELDING DRAWING (TOLERANCE:±0.05)

Main technical performance

Rated electrical load	DC 12V 2A
Contact resistance	$\leq 30\text{m}\Omega$
Insulation resistance	$\geq 100\text{M}\Omega$
Pressure resistance	AC 500V 1min
Insertion force	3-30N
Operating temperature range	-20℃~+70℃
service life	5000cycles



SCHEMATIC

6	弹片	1	H65	镀银
5	插片	1	H62	镀银
4	平片	1	H62	镀银
3	中心针	1	H62	铜锡
2	盖板	1	PPA	黑
1	基座	1	PPA	黑
序号	名称	数量	材料	备注

MANUFACTURE DWG

东莞市讯普电子科技有限公司
DongGuan XunPu Electronics Co.,LtdUNLESS OTHERWISE
SPECIFIED TOLERANCESTITLE:
DC SOCKET

PAR DC-006-B165

DWN

CHKD

APVD

SCALE N:A UNIT:MM

SIZE:A4 SHEET:1F1

REV:A

DECIMALS:

X.X±0.30

X.XX±0.25

X.XXX±0.15

ANGLES:

X.*±5°

X.X*±1°

CUSTOMER COPY