
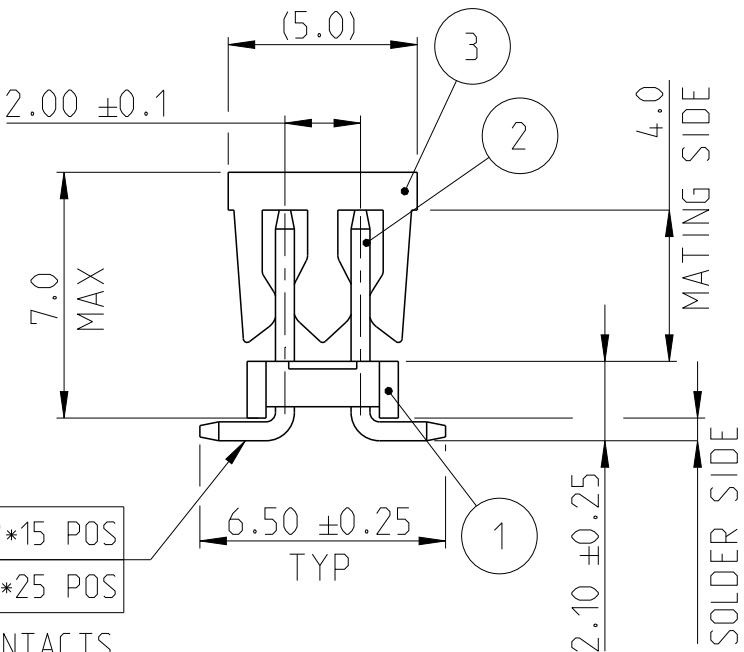




P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	PRODUCTION RELEASE	30AUG2019	SS	PS
	A1	REMOVED TOLERANCE FROM DIM F	17DEC2019	AY	PS
	A2	PARTS OBSOLESCENCE	BGC	PS	

- NOTES:
- MATERIAL
HOUSING & P&P CAP : HIGH TEMPERATURE THERMOPLASTIC, UL94-V0;COLOR- BLACK
CONTACT PIN : COPPER ALLOY
FINISH :
MATING SIDE : MIN. 0.38 μ m GOLD OVER NICKEL UNDER PLATING.
SOLDER SIDE : MIN. 2.0 μ m BRIGHT TIN OVER NICKEL UNDER PLATING.
 - PACKAGING: TAPE AND REEL (WITH PICK AND PLACE CAP).
 - TOLERANCE NOT CUMULATIVE.
 - CUTTING BURR MAX. 0.25 mm

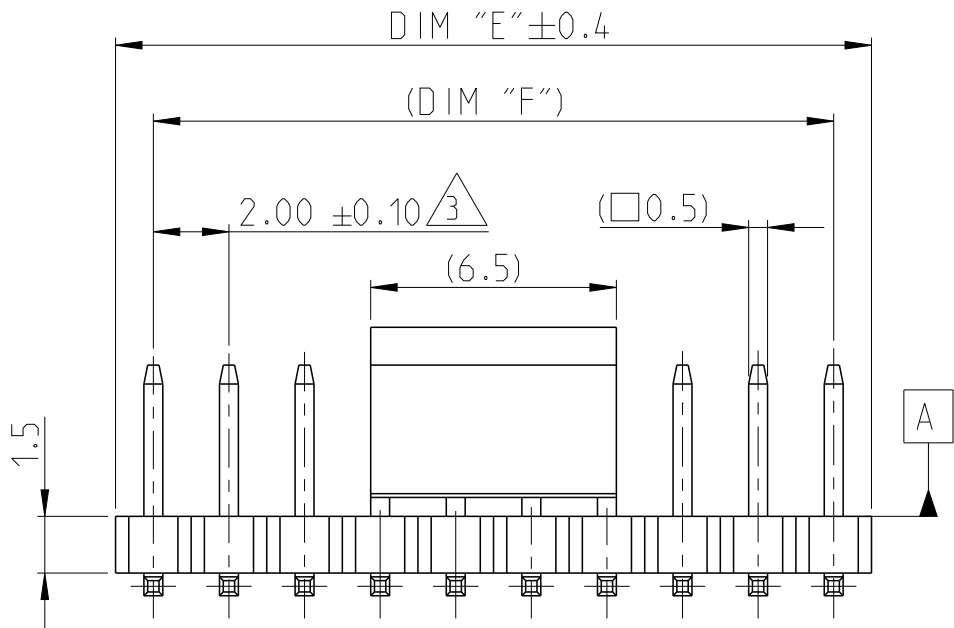


0.10	A	2*02-2*15 POS
0.15	A	2*16-2*25 POS

ALL CONTACTS

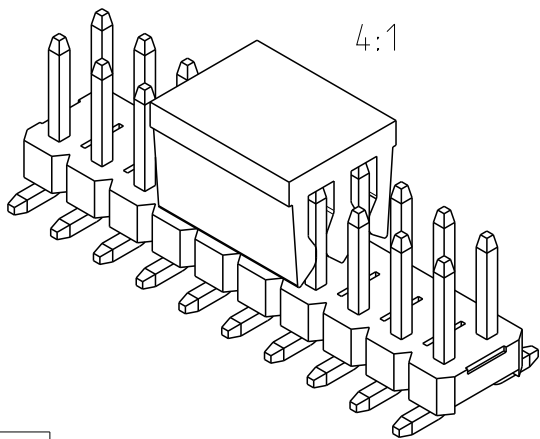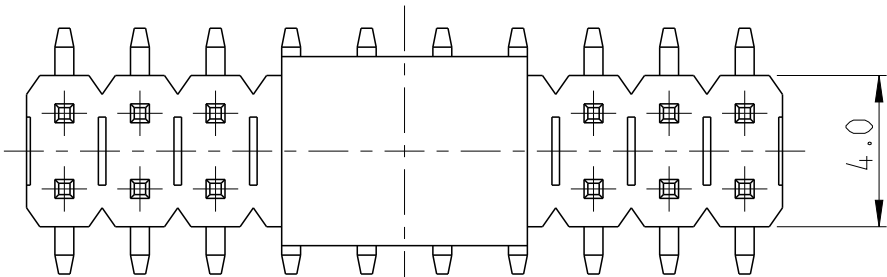

OBSOLETE

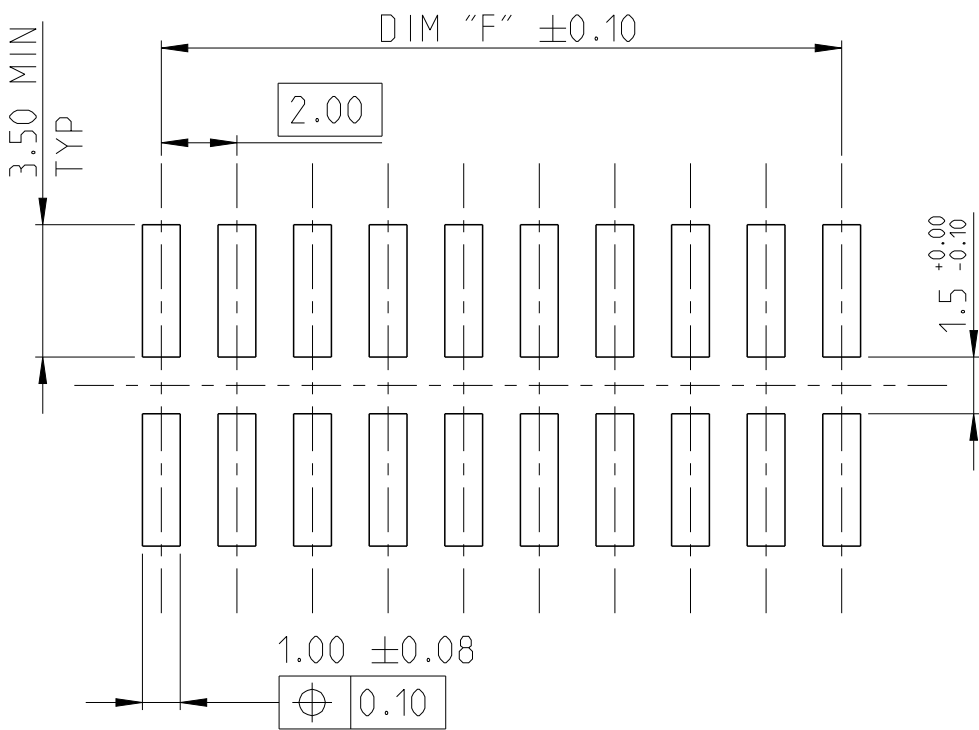

RECOMMENDED PCB PATTERN

1-2842143-0 AS SHOWN

PICK AND PLACE CAP	3
CONTACT PIN	2
HOUSING	1
DESCRIPTION	ITEM NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN SUBHASREE S 09AUG2019	TE Connectivity		
		CHK KARTHIK JK 13AUG2019			
		APVD PRASHANTH S 14AUG2019			
		PRODUCT SPEC 108-64040			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:	NAME AMPMODU 2mm BREAKAWAY HEADER, DUAL ROW, VERTICAL SMD, 0.38Au TR, WITH PICK AND PLACE CAP		
		0 PLC ±0.2	SIZE A3		
		1 PLC ±0.15	CAGE CODE 00779		
		2 PLC ±0.15	DRAWING NO C-2842143		
		3 PLC ±0.15	RESTRICTED TO -		
		4 PLC ±0.15			
		ANGLES ±2°			
MATERIAL SEE NOTES		FINISH SEE NOTES			
		WEIGHT -			
		CUSTOMER DRAWING			
		SCALE 5:1	SHEET 1 OF 1		
		REV A2			