


REV	ECN NO	DESCRIPTION	DESIGN	APPROVAL	DATE
A1	NEW	Replace frame			2018.06.12

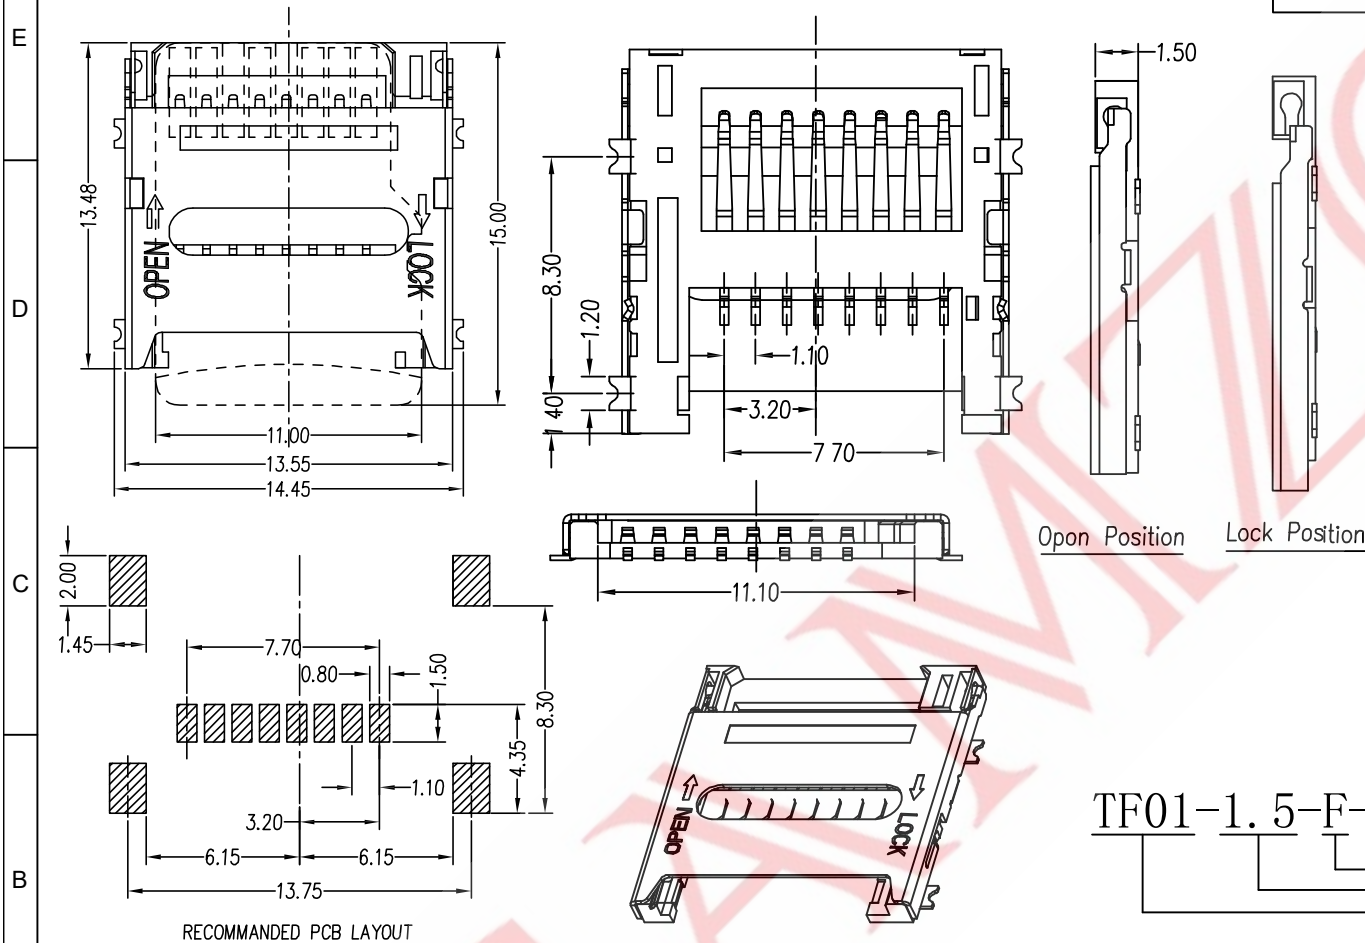

Specification

*Electrical Characteristics:

Contact Current Rating: 0.5 Amperes.

Dielectric Withstanding Voltage: AC500V r.m.s.

Insulation Resistance: 1000 MΩ Minimum.

Contact Resistance: 40 mΩ Maximum.

*Environmental:

Operating Temperature: $-25^{\circ}\text{C} \sim +90^{\circ}\text{C}$.

*Environmental:

Mating Cycles: 10,000 Insertions.

*Mechanical Characteristics:

Card Push Insertion/Out Force: 0.7~1.20kaf.

Contact Separation Force:0.20kqf Minimum.

*Material:

Insulator:HI-Temp Plastic UL 94V-0 Rated.

Contact: Copper Alloy($t=0.15\text{mm}$).

Shell:Stainless Steel($t=0.20\text{mm}$).

TF01-1.5-F-A

4. Mold Code: A=00

— 3.Type: Flip-Top

— 2.Height: $H=1.5\text{mm}$

— 1.Series: TF01 Card Holder

3	Shell	1	None
2	Contact	8	Au/Sn
1	Housing	1	N/A
No.	Name	Q'ty	Finish

ITEM DESCRIPTION MATERIAL QTY FINSH/COLOR										FIRST VIEW				The copyright belongs to samzo parts [China] Co., Ltd. please use the material after samzo parts agree to authorize. The final right of interpretation belongs to samzo parts. WWW.KKK-JP.COM		TITLE::: TF01 掀盖式 H1. 5MM	
A 塑胶 LCP UL 94V-0 1 黑色																DWG NO: TF01-P090	
A 外壳 不锈钢 1 镀镍																PART NO: TF01-1802110	
A 端子 铜合金 1 镀金										≥0~2< ±0.15		SCALE 1:1 UNIT mm				MODEL NO: TF01-1.5-F-A	
A	DESIGN WANGGUIFA 2018.06.12 ≥2~5< ±0.25										SAMZO COMPONENTS Electronic switch and connector manufacturer						
	CHECKED ZHENGUILAN 2018.06.12 ≥0~2< ±0.15																
	F APPROVED LILIANJIANG 2018.06.14 ≥5 ±0.35																
1		2			3			4		5		6		7		8	