
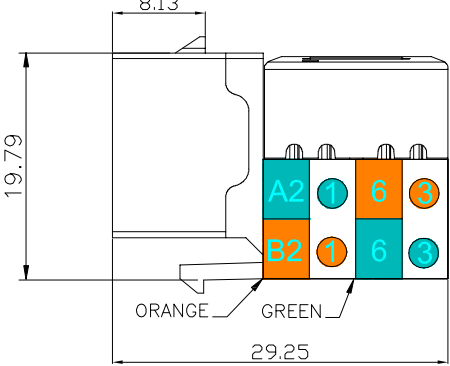



	1	2	3	4	5	6	7	
A								A
B								B
C								C
D								D
E								E
F								F
G								G
H								H
	1	2	3	4	5	6	7	CON1349

NOTES:

General information:


1. Tool Installation
2. Unshielded
3. Transmission Properties: CAT 6
4. Area of Application: 250MHz, 1GBit
5. Standard: ISO/IEC 11801 ; TIA/EIA 568-C

ELECTRICAL:

1. VOLTAGE RATING: 125VAC.
2. CURRENT RATING: 1.5AMP.
3. CONTACT RESISTANCE: 100mΩ MAX.
4. INSULATION RESISTANCE: 1000 MΩ MIN. @ 500 VDC.
5. DIELECTRIC STRENGTH: 750 VAC 60Hz, 1 MIN.

MECHANICAL:

1. HOUSING MATERIAL: PC UL94V-2 WHITE
2. INSERT MATERIAL: PBT+30%GF, UL94V-0. WHITE
3. PCB MATERIAL: FR-4 THICKNESS 1.6mm.
4. CONTACT MATERIAL: PHOSPHOR BRONZE STAMP PIN
t=0.35mm
50u" Selecti /



RoHS compliant

Unit: mm

Scale	Free						Date	Name	Customer-No.
TOLERANCE						Drawn	19.06.2018	Xavier	
X.X	±0.20					Approved	12.06.2019	Amy	ASSMANN WSW-No.
X.XX	±0.15								A-KEY-8-EA-GIB-WIW1
X.XXX	±0.10								Drawing-No.
DIM	TOL								ASS 7979 CO
		①	Drawn	19.06.2018	Xavier			rev02	
Angle	±5°	Id.	Modification	Date	Name			Replace	Sheet