



REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.04.28	阿树

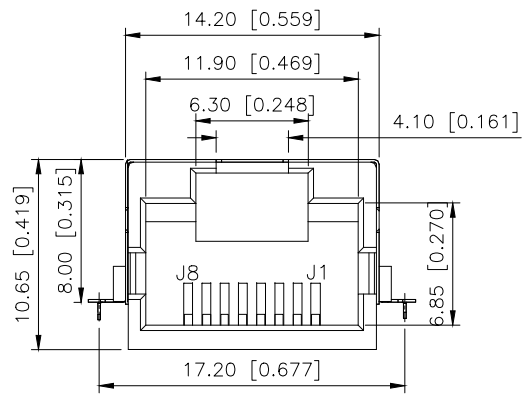


FRONT VIEW

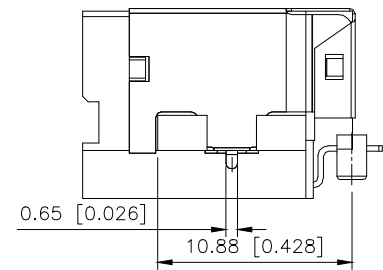


RIGHT SIDE VIEW


MATERIAL 材料:
HOUSING 外壳: LCP,UL94V-0,BLACK.
TERMINAL 端子: PHOSPHOR BRONZE T=0.3MM, GOLD PLATING
SHIELD 保护物: C2680,T=0.20MM
ELECTRICAL电气:
VOLTAGE 电压: 150 VOLTS AC.
CURRENT RATING 电流额定值: 1.5AMP.
DIELECTRIC STRENGTH 介电强度: 1000 VAC RMS 50HZ OR 60HZ,1 MIN
INSULATION RESISTANCE 绝缘电阻: 500 MEGA OHMS MIN.
CONTACT RESISTANCE 接触电阻: 40 MILLIOHMS MAX.
OPERATING TEMPERATURE 工作温度: -40°C~+80°C.
ALL CRITICAL DIMENSIONS WITH "※"

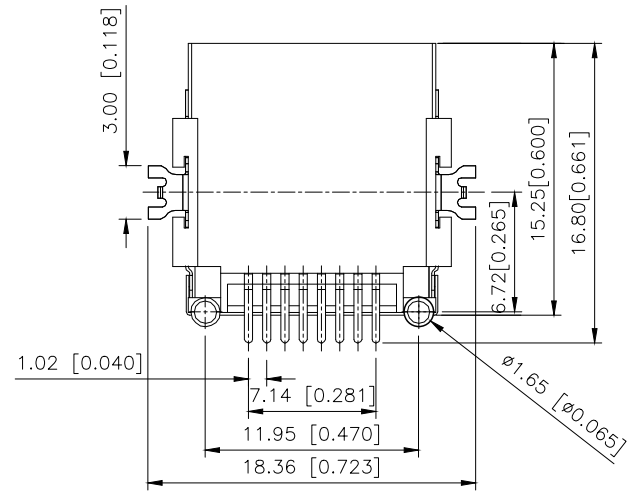

BOTTOM VIEW

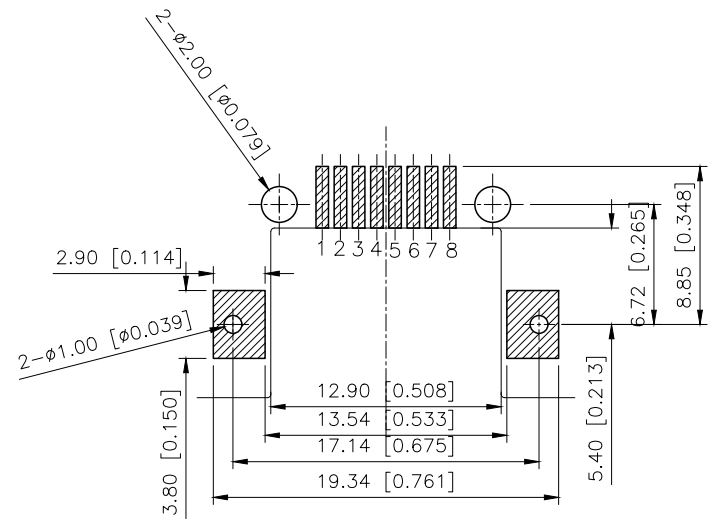

RECOMMENDED PCB LAYOUT
VIEWED FROM COMPONENT SIDE



X48ADGWA6SB1133

- 1: Au=1U"
- 3: Au=3U"
- 4: Au=6U"
- 5: Au=15U"
- 6: Au=30U"

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	MODEL TYPE: RJ JACK
CHECKED		UNIT: mm/in	PART NO.: X48ADGWA6SB1133
APPROVED		SIZE: A4	DWG NO.: