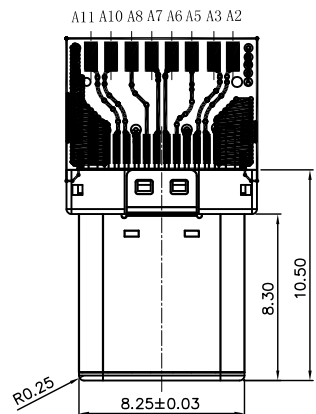


项目	零件名称	数量	材质	处理/备注
1	SHELL	1	STAINLESS	Ni: 50u"
2	Molding HOUSING	2	L.C.P	(Black)
3	GND SPRING	2	STAINLESS	Ni: 50u"
4	Insert molding 12PIN	2	L.C.P	(Black)
5	CONTACT	24	COPPER ALLOY	Contact area: gold flash, Solder tails: Tin100u", Ni: 50u"
6	PCB	1	--	--

; SPECIFICATION
MATERIAL

See drawing
STANDARD DATA

Operating temperature: -10°C ~ +60°C
Storage temperature: -20°C ~ +85°C

ELECTRICAL
Insulator resistance: 100Mohms Min.
Withstanding voltage: 100 VAC / minute
Contact resistance: initial 40mohms Max;
after 50mohms Max.

MECHANICAL
Mating force: 5~20N
Unmating force : 8~20N
Durability: 5000 cycles Min.

产品图 PRODUCT CHART DWG				深圳市精拓金电子有限公司					
公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	MM	制图 DRAWING	Z-Y-B	产品料号 PRODUCT PART NO.	918-118A2021A30331
X.	±0.25	X'.	±5'	比例 SCALE	1:1	审核 CHKD		产品名称 PRODUCT NO.	3.1TYPE-C公头K端/C7025+ 焊板3.1+ 电容
.X	±0.20	.X'.	±2'					角法 VIEW	⊕ ⊞
.XX	±0.15	.XX'.	±1'					版本 VER	A0
.XXX	±0.10	.XXX'.	±0.5'	日期 DATE	2015. 07. 14	核准 APPD			