

DIN rail bus connectors - TBUS8-18,8-PPPPPPPP-7035 - 2202396

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

DIN rail connector, number of positions: 8, pitch: 2.54 mm, color: light gray, 8 parallel contacts



Your advantages

- ✓ Space-saving DIN rail mounting
- ✓ Contact design enables electronics modules to be easily snapped on
- ✓ Power supply and communication without additional wiring
- ✓ Parallel and serial contacts for signal and data transmission



Key Commercial Data

Packing unit	30 pc
Minimum order quantity	30 pc
GTIN	 4 055626 115078
GTIN	4055626115078

Technical data

Dimensions

Length [l]	18.8 mm
Pitch	2.54 mm

General

Number of positions	8
Insulating material group	I
Rated surge voltage (III/2)	1.5 kV
Rated surge voltage (II/2)	1.5 kV
Rated voltage (III/2)	32 V
Rated voltage (II/2)	32 V
Nominal current I_N	6 A
Maximum load current	6 A

DIN rail bus connectors - TBUS8-18,8-PPPPPPPP-7035 - 2202396

Technical data

General

Insulating material	PA
Flammability rating according to UL 94	V0

General product information

Type of note	Recommendation
Note	Material of contact pads for bus connector, galvanic gold (hard gold)

Standards and Regulations


Flammability rating according to UL 94	V0
--	----

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings

Dimensional drawing

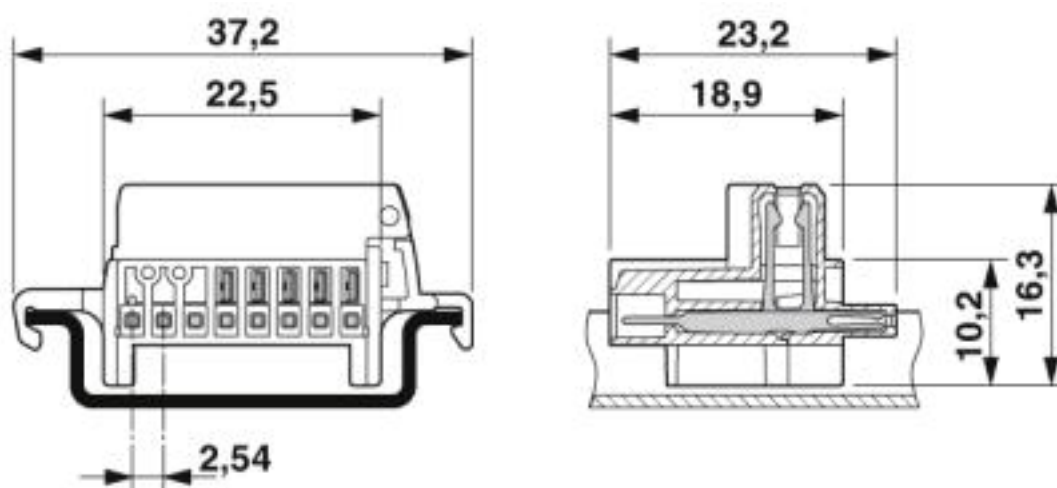

Approvals

Approvals

Approvals

UL Recognized / cUL Recognized / EAC / cULus Recognized

Ex Approvals

Approval details

DIN rail bus connectors - TBUS8-18,8-PPPPPPPP-7035 - 2202396

Approvals

UL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm E118976-20151204
Nominal voltage UN	29.9 V	
Nominal current IN	6 A	

cUL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm E118976-20151204
Nominal voltage UN	29.9 V	
Nominal current IN	4 A	

EAC		B.01742
-----	--	---------

cULus Recognized	
------------------	---

Phoenix Contact 2019 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>