
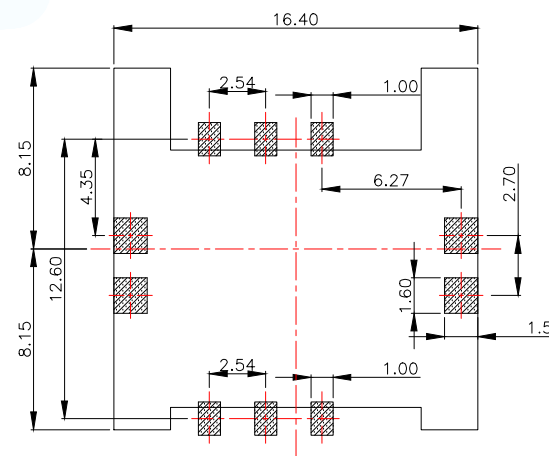
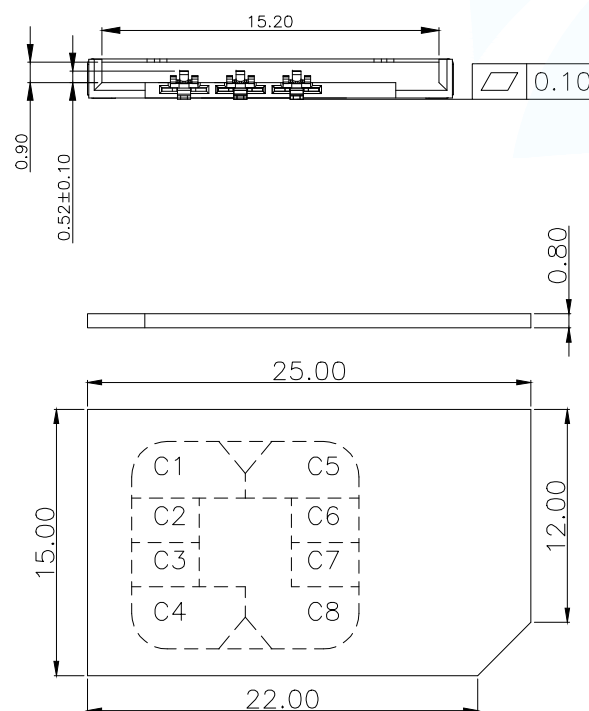


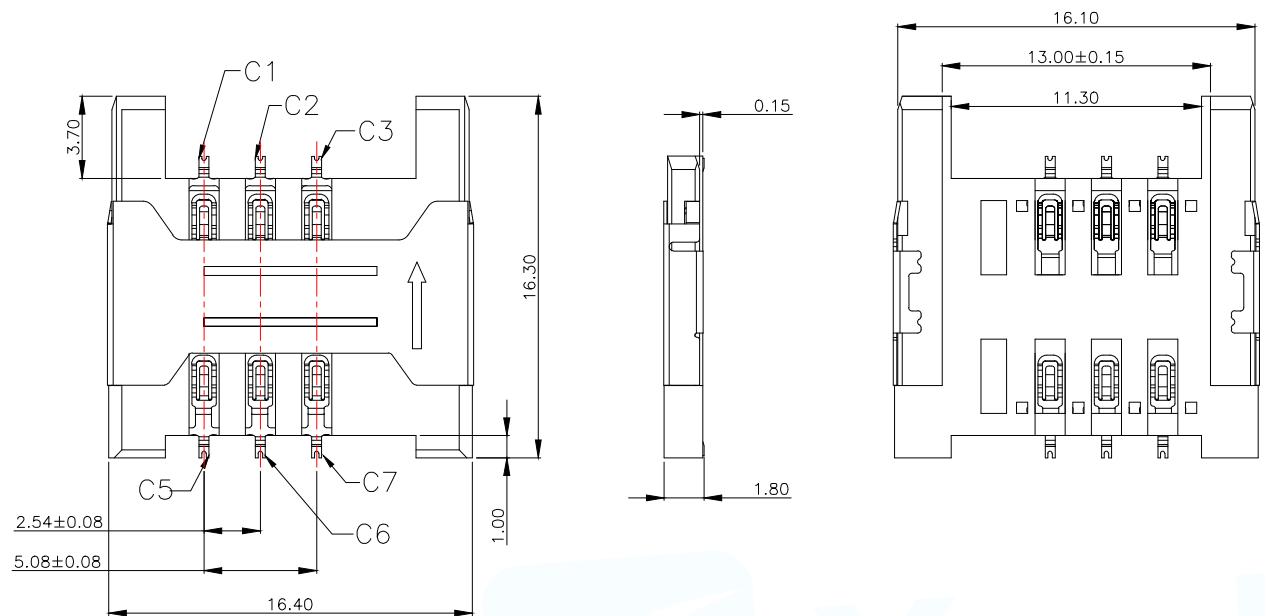

▨ PAD AREA
■ KEEP OUT AREA

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ± 0.05

Remark:

1. Material:

1.1 Rubber core: LCP UL94V-0

1.2 Terminal: C2680, half gold tin, contact gold plated 1U", matte tin 80U"

1.3 Shell: SUS201, nickel bottom 50U", welding feet gold-plated 1U"

2. Main features:

2.1 Rated current: 0.5A

2.2 Contact resistance: 50M Ω MAX2.3 Insulation resistance: 100 Ω MIN 100V

DC

2.4 Hipot test: 100V AC


2.5 Wetting property: temperature $235\pm 5^\circ\text{C}$, time $5\pm 0.5\text{s}$

2.6 Single PIN positive stress: 0.035KGF MIN



2.7 Service life: 7000 times

2.8 Temperature resistance: oven test: temperature $250\pm 5^\circ\text{C}$, time 2 minutes2.9 Working Environment: Temperature: $-30^\circ\text{C}\sim +80^\circ\text{C}$; Humidity: 80% MAX

MINI SIM CARD	
Pin No.	NAME
C1	VCC OF SIM
C2	RST OF SIM
C3	CLK OF SIM
C5	GND OF SIM
C6	VPP OF SIM
C7	I/O OF SIM
C4/C8	N/A

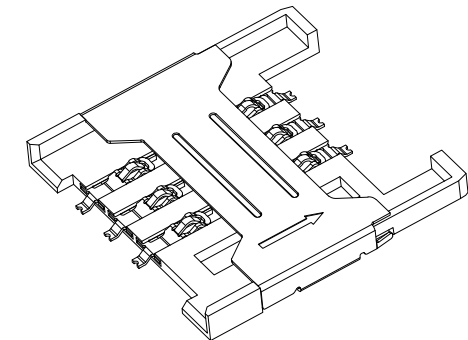

MANUFACTURE DWG		 东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co., Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE: MINI SIM CARD PUSH PULL 1.8H anti-break PIN There are files
			PAR
			SIM-104-ARP6H18
DECIMALS:	ANGLES:		DWN
X.: ± 0.50	X': $\pm 5^\circ$		CHKD
X.X: ± 0.25	X.X': $\pm 3^\circ$		APVD
X.XX: ± 0.12	X.XX': $\pm 1^\circ$		SCALE: 1:1
CUSTOMER COPY		SIZE: A4	UNIT: MM
		SHEET: 1F1	REV: A

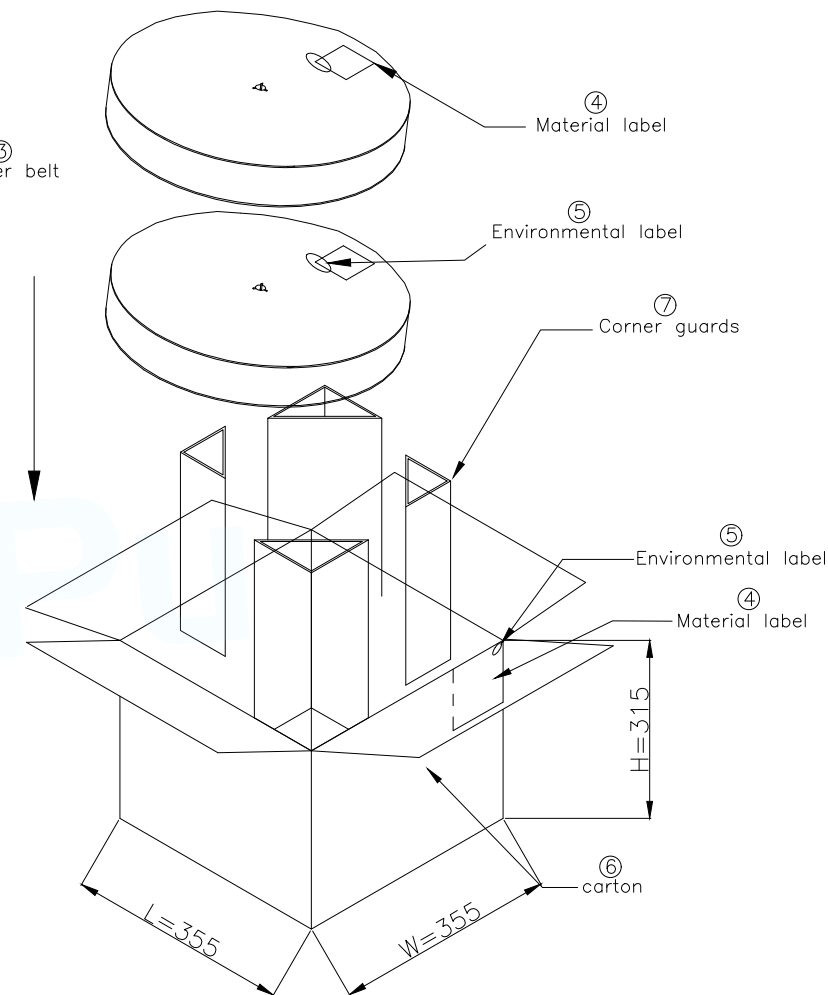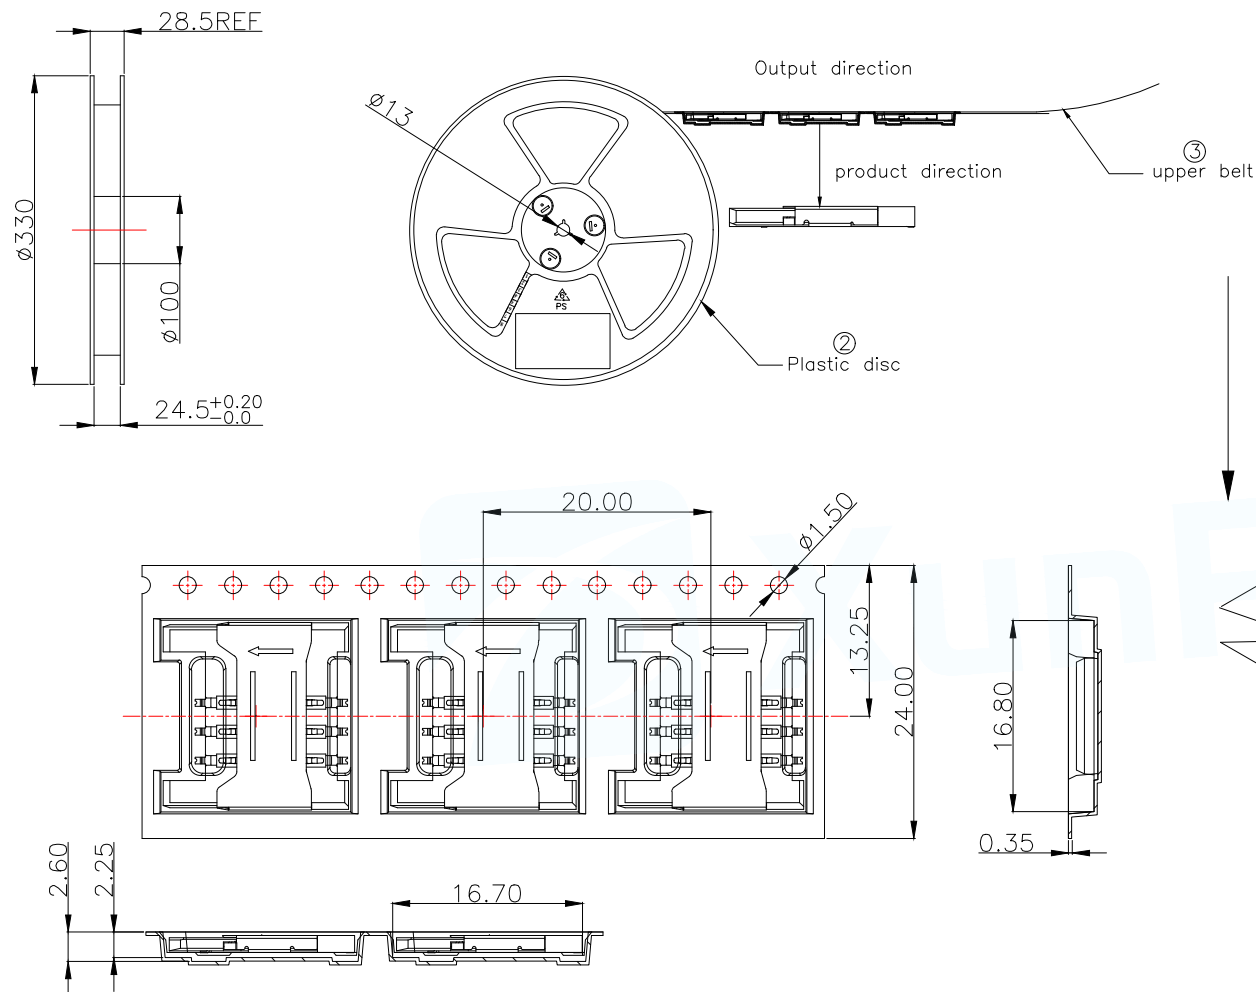

Remark:

1. Packing quantity: 1000PCS/REEL,
2. Peeling force: 0.3N~1N (jump within 0.3N); peeling angle: 165°~175°; peeling speed: 250~300mm/min
3. Packing method: self-adhesive; the front part and the tail part of the CARRY TAPE each leave a length of 240mm (that is, 15 spaces) for no product

MANUFACTURE DWG		 东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd		
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE:MINI SIM CARD PUSH PULL 1.8H ANTI-CRUSH PIN WITH FILE PACKING DRAWING	
			PAR	SIM-104-ARP6H18
DECIMALS:	ANGLES:		DWN	
X.:±0.50	X'.:±5°		CHKD	
X.X:±0.25	X.X':±3°		APVD	
X.XX:±0.12	X.XX':±1°		SCALE:1:1	UNIT:MM
CUSTOMER COPY		SIZE:A4	SHEET:1F1	REV:A