
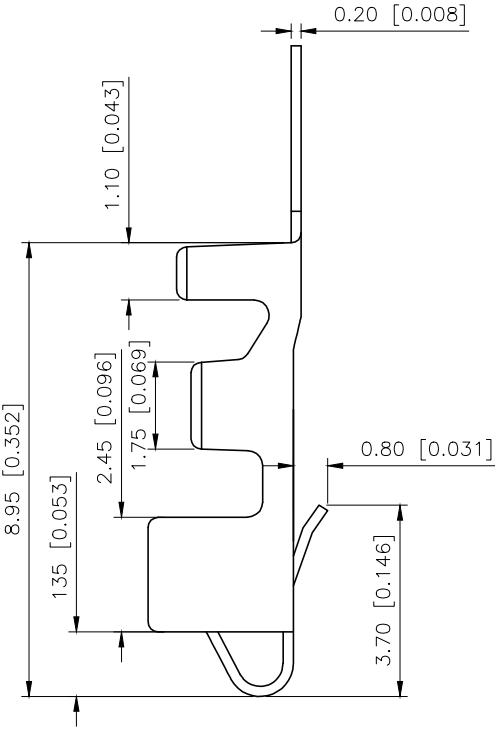


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.2.7	阿树

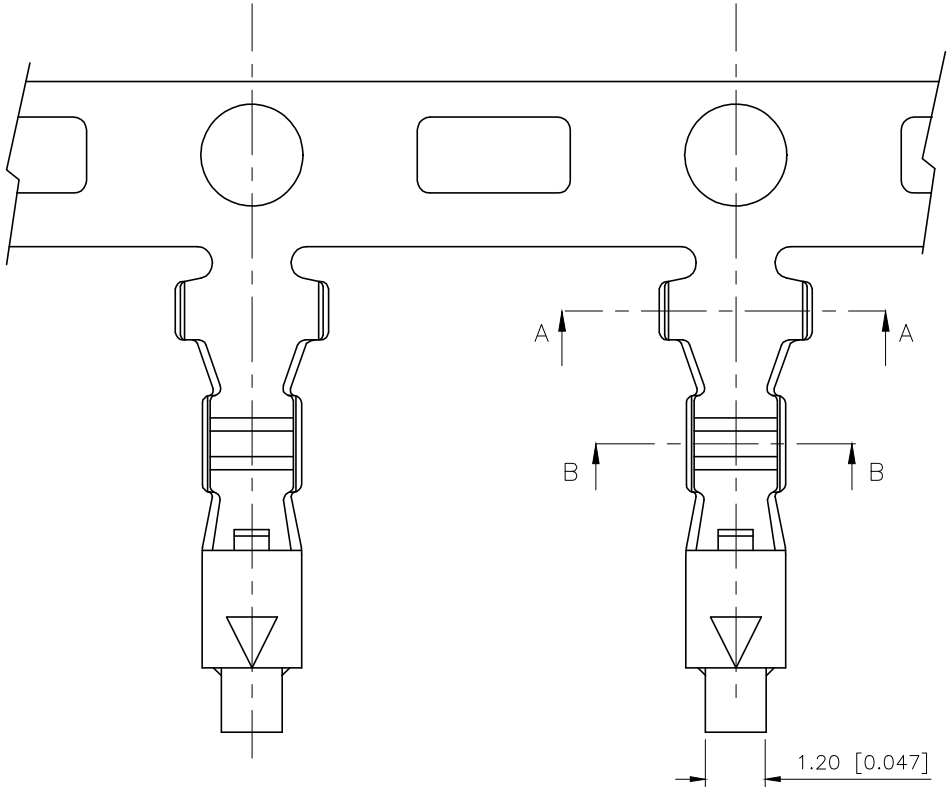


Specifications:
规格:
Voltage rating:250V AC/DC
额定电压: 250V AC/DC
Current rating:3A AC/DC
额定电流: 3A AC/DC
Withstanding voltage:1500V AC/minute
耐受电压: 1500V AC/分钟
Temperature range:-25℃~+85℃
温度范围: -25℃~+85℃
Insulation resistance:500MΩ min
绝缘电阻: 500MΩ Min
Contact resistance:10mΩ Max
接触电阻: 10mΩ Max

PART NO.:


X2501 I-P SN
① ② ③ ④

①Series Number.
②Category: T-terminal
③Material:P-Phosphor Bronze
④Plating:SN-Tin Plating
V01-Gold Flash


X2501T-PSN	Phosphor Bronze	AWG#22~28 O.D.1.8mm	X2501H
PART NO	Material	Wire Range	Suitable XKB Housing

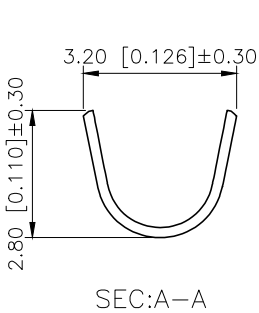

SEC:A-A



SEC:B-B



SEC:B-B

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE: 2.5mm Crimp Style Connector
CHECKED		UNIT:	mm/in	PART NO.: X2501T-PSN
APPROVED		SIZE:	A4	DWG NO.: