

AMP Signal Double Lock


TE Internal #: 1746062-1

PCB Mount Header, Vertical, Wire-to-Board, 14 Position, 2.5 mm [.098 in] Centerline, Fully Shrouded, Tin, AMP Signal Double Lock

[View on TE.com >](#)



Connectors > PCB Connectors > PCB Headers & Receptacles

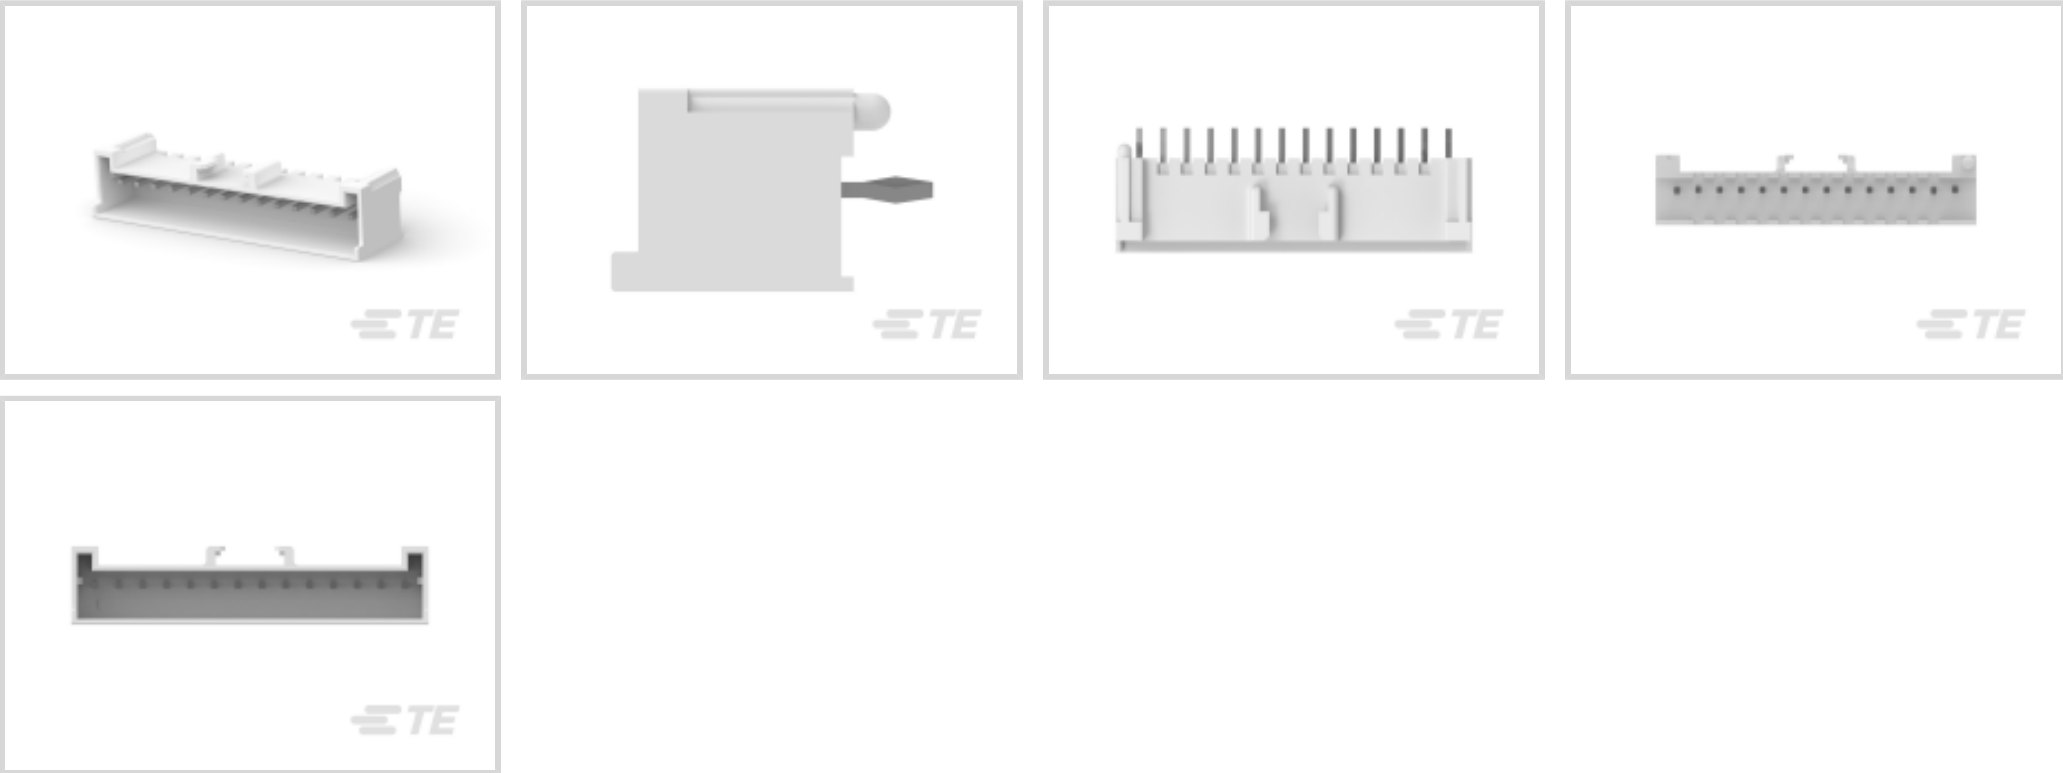

Connector System: **Wire-to-Board**

Number of Positions: **14**

Number of Rows: **1**

Centerline (Pitch): **2.5 mm [.098 in]**

PCB Mount Orientation: **Vertical**

Features

Product Type Features

Connector System	Wire-to-Board
Header Type	Fully Shrouded
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
PCB Connector Assembly Type	PCB Mount Header

Configuration Features

Number of Positions	14
Number of Rows	1
PCB Mount Orientation	Vertical

Electrical Characteristics

Operating Voltage	250 VAC
-------------------	---------

Body Features

Primary Product Color	Natural
-----------------------	---------

Contact Features

--	--



Mating Square Post Dimension	.64 mm[.025 in]
PCB Contact Termination Area Plating Material Thickness	.8 – 2.5 µm[31.49 – 98.42 µin]
Contact Layout	Inline
Contact Underplating Material Thickness	.5 – 1.2 µm[19.68 – 47.24 µin]
Contact Mating Area Plating Material Thickness	.8 µm[31.49 µin]
PCB Contact Termination Area Plating Material Finish	Matte
Contact Mating Area Plating Material Finish	Matte
Contact Underplating Material	Copper
PCB Contact Termination Area Plating Material	Tin
Contact Base Material	Copper Alloy
Contact Mating Area Plating Material	Tin
Contact Type	Pin
Contact Current Rating (Max)	3 A

Termination Features

Square Termination Post & Tail Dimension	.64 mm[.025 in]
Termination Post & Tail Length	3.2 mm[.126 in]
Termination Method to PCB	Through Hole - Solder

Mechanical Attachment

PCB Mount Alignment Type	Boss
Mating Alignment Type	Polarization
Mating Retention	With
PCB Mount Retention Type	Kinked
Connector Mounting Type	Board Mount
Mating Alignment	With
PCB Mount Alignment	With
PCB Mount Retention	With

Housing Features

Housing Material	6/6 Nylon GF
Centerline (Pitch)	2.5 mm[.098 in]

Dimensions

Connector Length	37.5 mm[1.47 in]
Connector Height	9.8 mm[.385 in]
Connector Width	8.2 mm[.32 in]



PCB Thickness (Recommended)	1.6 mm[.063 in]
-----------------------------	-----------------

Usage Conditions

Operating Temperature Range	-30 – 105 °C[-22 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Signal
---------------------	--------

Industry Standards

UL Flammability Rating	UL 94V-0
------------------------	----------

Packaging Features

Packaging Method	Loose Piece
------------------	-------------

Product Compliance

For compliance documentation, visit the product page on TE.com>


EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts




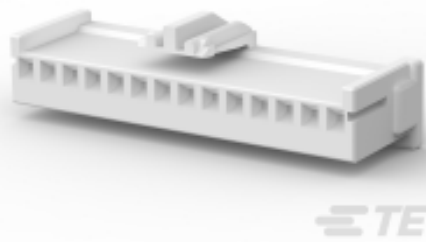


TE Part # 1746063-1
2.5SDL PLUG HSG 14P NAT



TE Part # 1743490-1
BLOWER MOTOR 3P HDR ASSY

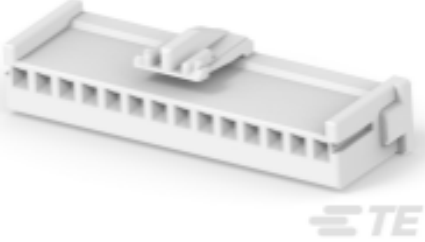

TE Part # 1746063-3
2.5mm SDL PLUG HSG 14P NAT



TE Part # 2-1376274-1
2.5 SDL STD HDR ASSY 2/4P

Also in the Series | AMP Signal Double Lock



Connector Caps & Covers(1)



Connector Contacts(14)




Connector Hardware(19)



Connector Seals & Cavity Plugs(10)



Insertion & Extraction Tools(1)

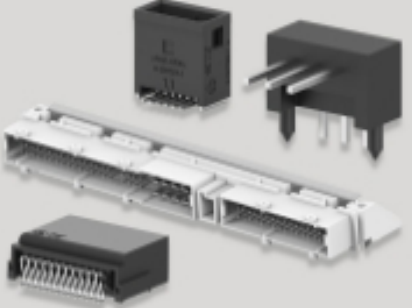

PCB Headers & Receptacles(144)



Rectangular Connector Housings(23)



Rectangular Power Connectors(3)




Standard Rectangular Connectors(1)



Wire-to-Board Connector Assemblies & Housings(76)

Customers Also Bought

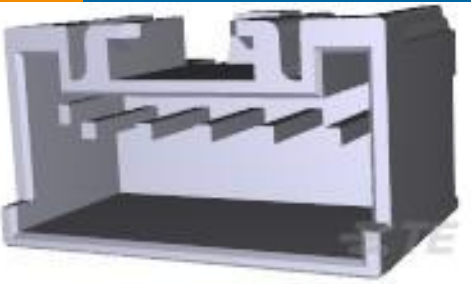


TE Part #917783-1
2.5 S.D.L POST HDR ASY 5P STD



TE Part #917784-1
2.5 S.D.L POST HDR ASY 6P STD



TE Part #1747996-1
GHC EYELET 12.4 2POS HEADER ASSY NATURAL

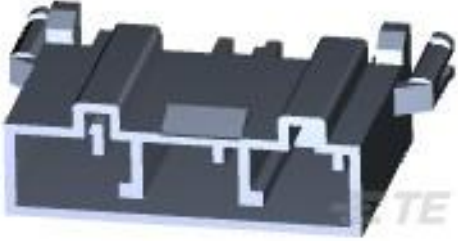

TE Part #1-1903415-1
GHC 9.0 3POS HDR ASSY RED



TE Part #917790-2
2.5 SDL POST HDR ASSY 12P RED

TE Part #1-179846-1
PDL 3P HDR 6.5 SR V/T ASSY NAT

TE Part #2232111-3
250 FASTON, FLAG, REC., 12-20 AWG, TPBR

TE Part #5-368572-1
FOAMING PROOF CAP 3POS NAT

TE Part #4-1903415-1
GHC 9.0 3POS HDR ASSY BLACK

Documents

Product Drawings

2.5SDL HDR 14P STD ASSY NAT

Japanese

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1746062-1_D.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1746062-1_D.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1746062-1_D.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Application Specification

English